

Hand Tools Catalogue



SATA has been the fastest growing premium-quality mechanics' hand tool company globally over the last 20 years. Our selection of products is designed and manufactured to serve professional mechanics as well as manufacturing and assembly technicians in a variety of industries including automotive, manufacturing, construction, and aerospace.





We challenge the status quo by delivering world-class quality, industry-leading innovation, and a highly gratifying experience with our brand.

SATA tools meet or exceed ANSI and DIN standards. SATA tool manufacturing facilities are ISO 9001 certified and Apex Tool Group provides Lifetime Warranty on SATA tools.

SATA is part of the umbrella company Apex Tool Group, LLC. The Apex Tool Group works collaboratively with distributors, retailers and large customers across the globe to make sure end users have the tools they need to solve realworld problems.

SATA tools are your ideal choice!

THE SATA PROMISE



TRUSTED BRAND MADE TO CHALLENGE

SATA is the fastest growing hand tool company – trusted by professionals globally.



WORLD CLASS QUALITY AND PERFORMANCE

Professionals count on SATA's high quality, innovation and world-class service.



A TOOL FOR EVERY JOB

From simple to unique projects, SATA has the tools to get every job done.



LIFETIME WARRANTY

All SATA Products will be repaired/replaced free of charge at SATA's discretion.





SATA is part of the umbrella company Apex Tool Group, LLC. With 7.500 employees in over 30 countries and an annual turnover of more than USD 1,3 billion, the Apex Tool Group, headquartered in Sparks, Maryland, is a leading global manufacturer and supplier of high-performance hand and power tools, tool storage, drill chucks, chain and electrical soldering products for industrial, commercial and demanding do-it-yourself applications.

ATG designs, manufactures, markets, and sells proprietary brands, including GEARWRENCH[®], Crescent[®], SATA[®], Cleco[®], Weller[®], and APEX[®] and also designs and manufactures a number of private label tool brands for retailers. ATG sells its products through direct, retail, professional and trade channels to customers in over 115 countries, and serves a multitude of global markets, including automotive, aerospace, electronics, energy, hardware, industrial, and consumer retail.

Learn more at www.apextoolgroup.com.

Our portfolio of innovative brands includes:

SATA Weller

Cleco[®] **APEX**


CRESCENT

CRESCENT

CRESCENT

Wiss

CRESCENT NICHOLSON

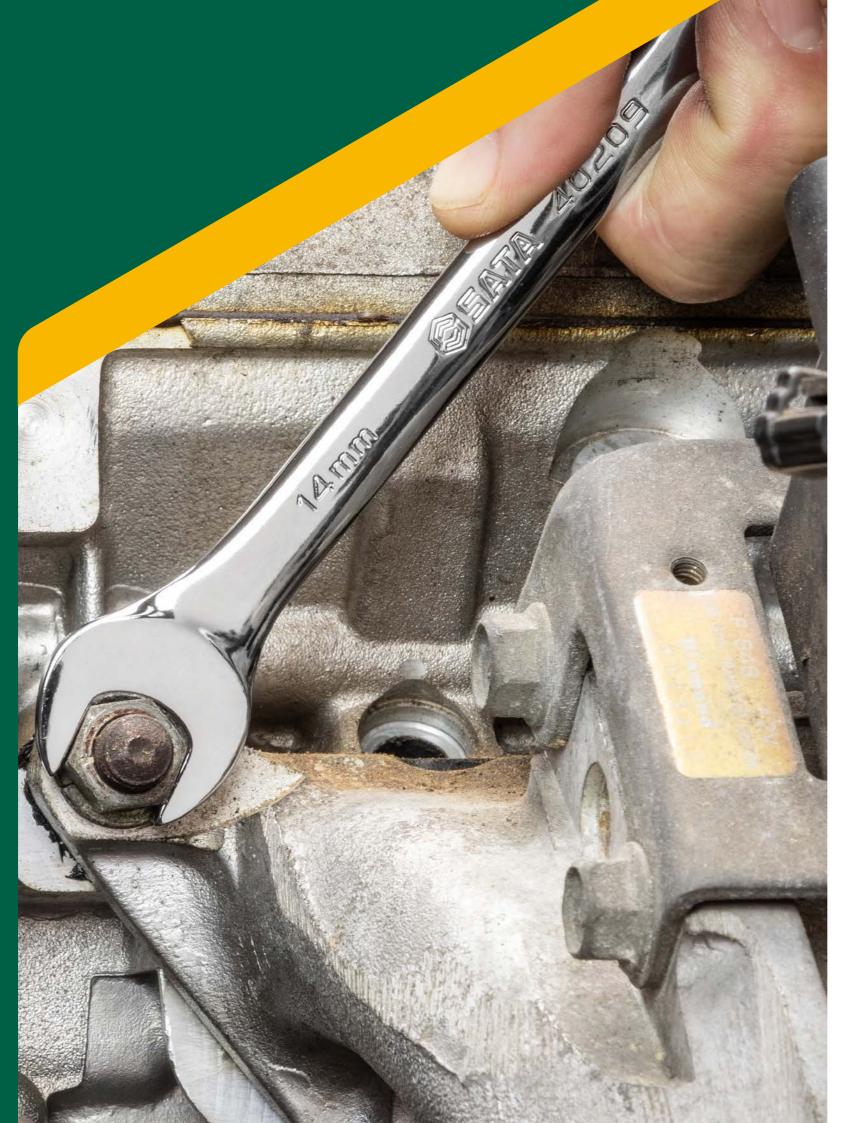

Article Code Index

Content



Ratcheting Wrenches 😒

Striking & Struck

Auto Speciality Tools

Other Tools

SATA Annal !! The second

| All steel constru durable trays fo Dual opening ca access to entire Equipped with a comfort and rea | antilever Tool Box ucted tool box opens to 3-tiers w or stroage and organization antilever design allows for quick a e tool box an easy to hold rounded steel har duced user fatigue from heavy gauge sheet steel wit | and easy ndle for | | |
|---|--|----------------------|---------------------|-----------|
| Article Code | Length (mm) | Width (mm) | Hight (mm) | \$ |
| ST95104ASC | 430.0 | 200.0 | 200.0 | 1 |
| powder coated Galvanized phos | from heavy gauge sheet steel wit finish sphate finish to resist corrosion or convenient carry and storage | | | 1 |
| powder coated Galvanized phos | finish sphate finish to resist corrosion | | SATE SATE | 1 |
| powder coated Galvanized phos Compact size fo | finish sphate finish to resist corrosion | Width (mm) | Hight (mm) | |
| powder coated Galvanized phos Compact size fo | finish sphate finish to resist corrosion or convenient carry and storage | | Hight (mm) 115.0 | |
| powder coated Galvanized phos Compact size for Article Code ST95101SC 6" Metal To Strong comfort Tool box made f | finish sphate finish to resist corrosion or convenient carry and storage Length (mm) 360.0 | Width (mm)150.0 | 115.0 | 1 |
| powder coated Galvanized phos Compact size for Article Code ST95101SC 6″ Metal To Strong comfort Tool box made f coated finish Galvanized phos | finish sphate finish to resist corrosion or convenient carry and storage Length (mm) 360.0 Col Box able handle | Width (mm)150.0 | - | 1 |
| powder coated Galvanized phos Compact size for Article Code ST95101SC 6" Metal To Strong comfort Tool box made f coated finish Galvanized phos | finish sphate finish to resist corrosion or convenient carry and storage Length (mm) 360.0 Col Box able handle from heavy gauge sheet steel wit sphate finish to resist corrosion | Width (mm)150.0 | 115.0 | 1 |

| All steel construdurable trays for Dual opening ca access to entire Equipped with a comfort and red | antilever Tool Box ucted tool box opens to 3-tiers or stroage and organization ntilever design allows for quid e tool box n easy to hold rounded steel h duced user fatigue rom heavy gauge sheet steel | ck and easy handle for | | |
|--|--|--|---------------------|-----------|
| Article Code | Length (mm) | Width (mm) | Hight (mm) | \$ |
| ST95104ASC | 430.0 | 200.0 | 200.0 | 1 |
| | sphate finish to resist corrosi | | | |
| • Galvanized phos | | | SATA SATA | Ĩ |
| Galvanized phos Compact size fo | sphate finish to resist corrosion or convenient carry and stora | ge | Hight (mm) | |
| Galvanized phos Compact size fo Article Code | sphate finish to resist corrosi | | Hight (mm) 115.0 | |
| Galvanized phos Compact size for Article Code ST95101SC Strong comfort Tool box made f coated finish Galvanized phos | sphate finish to resist corrosion or convenient carry and storage Length (mm) 360.0 DOI BOX | ge Width (mm) 150.0 with powder | - | 1 |
| Galvanized phos Compact size for Article Code ST95101SC 6" Metal To Strong comfort Tool box made f coated finish Galvanized phos | sphate finish to resist corrosion or convenient carry and storage Length (mm) 360.0 DOI BOX able handle rom heavy gauge sheet steel sphate finish to resist corrosion | ge Width (mm) 150.0 with powder | 115.0 | |

| All steel cons durable trays Dual opening access to en Equipped wit comfort and | th an easy to hold rounded steel h reduced user fatigue ed from heavy gauge sheet steel v | k and easy andle for | | |
|---|---|----------------------------|---------------------|-----------|
| | | | S SATA | |
| Article Code | Length (mm) | Width (mm) | Hight (mm) | \$ |
| ST95104ASC | 430.0 | 200.0 | 200.0 | 1 |
| - compact siz | e for convenient carry and storag | e Contraction | SRTA STA | |
| Article Code | Longth (mar) | Width (mm) | likeht (anna) | 14 |
| Article Code ST95101SC | Length (mm) 360.0 | Width (mm) 150.0 | Hight (mm) 115.0 | 1 |
| Strong comf Tool box made coated finish Galvanized p | Tool Box Fortable handle de from heavy gauge sheet steel v n hosphate finish to resist corrosic e for convenient carry and storag | n | COSATA COSATA | a |
| Article Code ST95115SC | Length (mm) 420.0 | Width (mm) 155.0 | Hight (mm) 120.0 | 1 |
| | | | | |

17" & 20" Metal Tool Box

- Sturdy carrying handle with two clip locks on the lid
- Tool box made from heavy gauge sheet steel with powder coated finish
- Galvanized phosphate finish to resist corrosion
- Compact size for convenient carry and storage



| Article Code | Size | Length (mm) | Width (mm) | Hight (mm) | |
|--------------|------|-------------|------------|------------|---|
| ST95102SC | 17″ | 428.0 | 177.0 | 184.0 | 1 |
| ST95103ASC | 20" | 508.0 | 218.0 | 243.0 | 1 |

15" & 16" Plastic Tool Box

- Lock and handle made of strong ABS material
- Tool box made of high impact resistant PP material
- ST95162SC: Comes with tool tray for storage and organization




Nature of this product is subject to wear and tear upon usage. Not covered under Lifetime Warranty.

| Article Code | Length (mm) | Width (mm) | Hight (mm) | \$ |
|--------------|-------------|------------|------------|-----------|
| ST95161SC | 385.0 | 202.0 | 140.0 | 6 |
| ST95162SC | 385.0 | 225.0 | 203.0 | 6 |

21" Plastic Tool Box

- Lock and handle made of strong ABS material
- Tool box made of high impact resistant PP material
- Comes with tool tray for storage and organization





| Article Code | Length (mm) | Width (mm) | Hight (mm) | \$ |
|--------------|-------------|------------|------------|-----------|
| ST95164SC | 530.0 | 235.0 | 220.0 | 6 |

24" Aluminum Trolley Case

- Double lock structure and anti-shock EVA pad lining for more safety
- Multipurpose tool trays for daily use to organize your tools systematically
- Case is durable, safe and has an impact resistant structure force up to 100 kg (220 lbs), surface panel force up to 50 kg (110 lbs)
- Multipurpose with separators can arbitrarily divide the storage space
- Double lock structure and anti-shock EVR pad lining for more safety

| | Nature of this product is subject to wear and tear upon |
|-------------|---|
| <u>/!</u> \ | Nature of this product is subject to wear and tear upon usage. Not covered under Lifetime Warranty. |

| Article Code | Length (mm) | Width (mm) | Hight (mm) | |
|--------------|-------------|------------|------------|---|
| ST03621 | 490.0 | 420.0 | 230.0 | 0 |

13" & 16" Portable Tool Bag

- Waterproof design
- High quality double zipper top
- Reinforced pockets for maximum durability
- Nonslip handles and adjustable padded shoulder straps provide maximum comfort
- Waterproof material resists moisture for long-lasting performance

Nature of this product is subject to wear and tear upon usage. Not covered under Lifetime Warranty.

| Article Code | Length (mm) | Width (mm) | Hight (mm) | \$ |
|--------------|-------------|------------|------------|-----------|
| ST95181 | 330.0 | 215.0 | 250.0 | 10 |
| ST95182SC | 380.0 | 300.0 | 260.0 | 10 |

17" Portable Tool Bag

- Waterproof design
- High quality double zipper top
- Internal and external pockets provide a variety of storage and organization options
- Reinforced pockets for maximum durability
- Nonslip handles and adjustable padded shoulder straps provide maximum comfort

Nature of this product is subject to wear and tear upon usage. Not covered under Lifetime Warranty.

| Article Code | Length (mm) | Width (mm) | Hight (mm) | |
|--------------|-------------|------------|------------|----|
| ST95184SC | 440.0 | 330.0 | 330.0 | 10 |







18" Tool Backpack

- Backpack style is ideal for everyday, hands-free use
- Integrated handle on the outside of the bag is easy to grab
- Interior and exterior pockets provide a variety of storage and organization options
- Made of durable woven material to withstand even the toughest job site



Nature of this product is subject to wear and tear upon usage. Not covered under Lifetime Warranty.

| Article Code | Length (mm) | Width (mm) | Hight (mm) | (|
|--------------|-------------|------------|------------|----------|
| ST95198SC | 350.0 | 200.0 | 450.0 | 6 |

23" Trolley Tool Bag

- Made of 600 denier water-resistant material



| usage. Not | usage. Not covered under Lifetime Warranty. | | | Tools not |
|--------------|---|------------|------------|-----------|
| Article Code | Length (mm) | Width (mm) | Hight (mm) | |
| ST95188 | 430.0 | 240.0 | 380.0 | |

4-Pocket Belt Pouch

- Multiple sized pockets offer a variety of storage and organization options
- Constructed with 900-denier nylon construction for maximum strength and durability



0

Nature of this product is subject to wear and tear upon usage. Not covered under Lifetime Warranty.

| Article Code | Length (mm) | Width (mm) | |
|--------------|-------------|------------|----|
| ST95211 | 235.0 | 110.0 | 10 |

8-Pocket Belt Pouch

- Multiple sized pockets offer a variety of storage and organization options
- Constructed with 900-denier nylon construction for maximum strength and durability

| Nature of usage. Not | this product is subject to wear and tear upon t covered under Lifetime Warranty. |
|----------------------|---|
| Article Code | Length (mm) |
| | |

320.0

1 Drawer Utility Cart 33"

ST95213SC


- Cart body made of 1.2 mm thickness steel for strength and durability
- Bottom storage tray is ideal for storing larger items
- Top storage tray is ideal for storing commonly used tools and equipment
- Two swivel (with stopper) and two fixed casters with pin rolling bears
- Drawer load capacity 35 kg
- Total load capacity 150 kg

| Article Code | Length (mm) | Wi |
|--------------|-------------|----|
| ST95108SC | 841.0 | |

2 Drawer Utility Cart 38"

- Cart body made of 1.2 mm thickness steel for strength and durability
- Easy lid opening and closing with gas charged lift support struts
- Foldable side table for convenience and space saving
- 5" heavy-duty casters; 2 fixed and 2 locking swivel
- Screwdriver compartment for easy convenient storage
- Recessed 'through holes' allow for the secure storage of extra long items like pry bars
- Bottom storage tray is ideal for storing larger items
- Drawer load capacity 35 kg
- Total load capacity 150kg

| Article Code | Length (mm) | W |
|--------------|-------------|---|
| ST95118SC | 880.0 | |

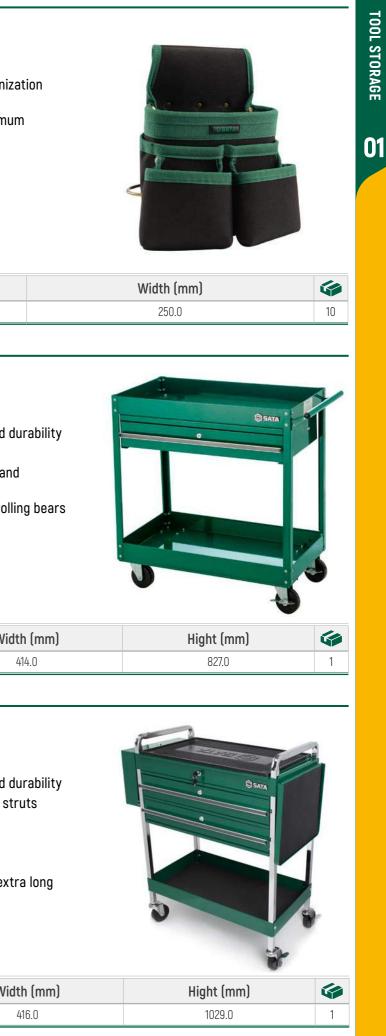

4 Drawer Tool Cart

- Durable PVC handle for comfortable grip
- Cart body made of 1.2 mm thickness steel for strength and durability
- Easy lid opening and closing with gas charged lift support struts
- Bottom storage tray is ideal for storing larger items
- 5" heavy-duty casters; 2 fixed and 2 locking swivel
- Drawer load capacity 35 kg, total load capacity 240 kg



| Article Code | Length (mm) | Width (mm) | Hight (mm) | |
|--------------|-------------|------------|------------|---|
| ST95119SC | 877.0 | 549.0 | 1015.0 | 1 |

4 Drawer Roller Cabinet 27"

- Durable aluminum alloy handle for comfortable grip
- 1.2 mm thickness steel body for strength and durability
- High durability roller tracks enable smooth sliding
- Bottom storage compartment with doors is ideal for storing larger items
- Two swivel and two fixed casters with pin rolling bears
- 5" heavy-duty casters
- Drawer load capacity 35 kg, total load capacity 240 kg
- Drawer size 577 x 404 mm

| Article Code | Length (mm) | Width (mm) | Hight (mm) | |
|--------------|-------------|------------|------------|---|
| ST95125 | 692.0 | 468.0 | 840.0 | 1 |

Width (mm)

390.0

Mini Roller Cabinet 30"

- Open top tray for easy tools placement
- Shuttle door for easy opening/closing
- See-through net structure on side panels

Length (mm)

635.0

- Total load capacity 100 kg
- Drawer load capacity 35 kg

Article Code

ST95111SC



| Equipped with E for convinent st for convinent st 45 mm ball bear Comes with an a and ease to tran Durable powder 5" heavy duty ca Gray color matt | oller Cabinet 28" rner design for better strengt EVA foam liners for each draw corage and tool protection ring slide for exceptional load aluminium handle providing re nsport the cabinet r coated finish protects again asters for smooth running an ed surface powder coatings for bacity 35 kg, total load capacity ax 375 mm | er and a EVA top mat capacity esistance protection st scratches and marring d durability for better scratch resistant | | |
|---|--|--|--------------------------|---|
| Article Code | Length (mm) | Width (mm) | Hight (mm) | |
| ST95121 | 770.0 | 470.0 | 896.0 | 1 |
| High durability r Two swivel and 5" heavy-duty ca Drawer load cap | oacity 35 kg, total load capaci | liding Iling bears | | |
| High durability r Two swivel and 5" heavy-duty ca Drawer load cap Drawer size 577 | roller tracks enable smooth s two fixed casters with pin rol asters bacity 35 kg, total load capaci x 404 mm | liding Iling bears ty 240 kg | Hight (mm) | |
| High durability r Two swivel and 5" heavy-duty ca Drawer load cap | oller tracks enable smooth s two fixed casters with pin rol asters bacity 35 kg, total load capaci | liding Iling bears | Hight (mm) 840.0 | 1 |

| for convinent st 45 mm ball bear Comes with an a and ease to trar Durable powder 5" heavy duty ca Gray color matt | Ther design for better strength a VA foam liners for each drawer corage and tool protection ring slide for exceptional load ca aluminium handle providing resist hsport the cabinet coated finish protects against s asters for smooth running and d ed surface powder coatings for bacity 35 kg, total load capacity is x 375 mm | and a EVA top mat pacity stance protection scratches and marring lurability better scratch resistant | | |
|---|---|---|----------------------------|-----------|
| Article Code | Length (mm) | Width (mm) | Hight (mm) | \$ |
| ST95121 | 770.0 | 470.0 | 896.0 | 1 |
| 5" heavy-duty ca Drawer load cap Drawer size 577 | oacity 35 kg, total load capacity | 240 kg | | |
| Drawer load cap Drawer size 577 | oacity 35 kg, total load capacity x 404 mm | | | |
| Drawer load cap | oacity 35 kg, total load capacity | 240 kg Width (mm) 468.0 | Hight (mm) 840.0 | 1 |

| Article Code | Length (mm) | Width (mm) | Hight (mm) | 4 |
|--------------|-------------|------------|------------|---|
| ST95107SC | 780.0 | 550.0 | 1180.0 | 1 |

| | | ĝ | |
|--|---|---|--|
| | | | |
| | I | I | |

8 Drawer Roller Cabinet 45"

- Durable PVC handle for comfortable grip
- 1.2 mm thickness steel body for strength and durability
- High durability roller tracks enable smooth sliding
- Two swivel (with stopper) and two fixed casters with pin rolling bears
- Drawer load capacity 35 kg
- Total load capacity 240 kg



| Article Code | Length (mm) | Width (mm) | Hight (mm) | |
|--------------|-------------|------------|------------|---|
| ST95109SC | 1035.0 | 457.0 | 897.0 | 1 |

168 Pc. Tool Storage and Tray Set with Tool Trolley

| ST09903SJ - 27 Pc. 1 ST09904-02-10 Pc. 1 ST09906 - 30 Pc. ST09907 - 8 Pc. M ST09909-02-5 Pc. A ST09911SJ - 4 Pc. SI ST09912SJ - 4 Pc. P ST09913SJ - 13 Pc. 0 | I/4" Drive 6 Point Metric Socket Tray Set /2" Drive 6 Point Metric Socket Tray Set Metric Open End and Combination Ratch Metric Combination Wrench and Hex Key letric Combination Wrench Tray Set djustable Wrench and Pliers Tray Set nap Ring Pliers Tray Set liers Tray Set Combination Screwdriver Tray Set er Roller Cabinet 28" | 0 | |
|---|--|--------|--|
| Please refer t | o the warranty terms of the individual p | roduct | |

| Article Code | Length (mm) | Width (mm) | Hight (mm) | |
|--------------|-------------|------------|------------|---|
| ST09927 | 770.0 | 470.0 | 896.0 | 1 |

300 Pc. Tool Storage and Tray Set with Tool Trolley

CONTENTS:

| Source and Source | | |
|--|--|-----|
| ST09901SJ - 66 Pc. 1/4" Drive 6 Point Metric Socket Tray Set | ST09909-02- 5 Pc. Adjustable Wrench and Pliers Tray Set ST09910 - 8 Pc. File Tray Set | T |
| ST09902SJ - 33 Pc. 3/8" Drive 6 Point Metric Socket Tray Set | ST09911SJ - 4 Pc. Snap Ring Pliers Tray Set ST09912SJ - 4 Pc. Pliers Tray Set | for |
| ST09903SJ - 27 Pc. 1/2" Drive 6 Point Metric Socket Tray Set | ST09913SJ - 13 Pc. Combination Screwdriver Tray Set ST09914SJ - 36 Pc. 3/8" and 1/2" Drive 6 Point Metric | |
| ST09904-02- 10 Pc. Metric Open End and Combination Ratcheting Wrench Tray Set | ST099143) - 36 PC. 3/8 and 7/2 brive 6 Point Metric Impact Socket Tray Set ST09915SJ - 26 Pc. 1/2" Drive 6 Point Metric Socket | |
| ST09905 - 10 Pc. Metric Offset Box End Wrench Tray Set | Tray Set | |
| ST09906 - 30 Pc. Metric Combination Wrench and Hex Key Tray Set | Combination Wrench Tray Set | |
| ST09907 - 8 Pc. Metric Combination Wrench Tray Set | ST95107SC - 7 Drawer Roller Cabinet 31" | |
| | | |

Please refer to the warranty terms of the individual product

| Article Code | Length (mm) | Width (mm) | Hight (mm) | \$ |
|--------------|-------------|------------|------------|-----------|
| ST09928 | 780.0 | 550.0 | 1180.0 | 1 |

168 & 300 PC. TOOL **STORAGE AND TRAY SET** WITH TOOL TROLLEY





Contains tools Ouick release needed for most ratchet repairs

Sockets feature Ratcheting off-corner loading









ST09927 ST09928

box end

Precise fit



66 Pc. 1/4" Drive 6 Point Metric Socket Tray Set

CONTENTS:

| Quick-Release Ratchet 6pt. Metric Sockets 3.5, 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14 mm 6pt. Metric Deep Sockets 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13 mm Bit Sockets Slotted 4, 5.5, 6.5 mm Phillips #1, #2, #3 Pozidriv #1, #2, #3 Torx® T8, T10, T15, T20, T25, T27, T30, T40 Hex 3, 4, 5, 6, 7, 8 mm 25L Bits Phillips #0, #1, #2, #3; | 8 - Accessories Spinner Han Wobble Exte Flex Extensic T-Handle Universal Joi Magnetic Qu Holder Bit Adapter |
|---|---|
| Slotted 3, 4, 5, 6 mm | |





| Article Code | Length (mm) | Width (mm) | Hight (mm) | |
|--------------|-------------|------------|------------|---|
| ST09901SJ | 375.0 | 185.0 | 45.0 | 4 |

33 Pc. 3/8" Drive 6 Point Metric Socket Tray Set

CONTENTS:

- 1 Quick-Release Ratchet
- 15 6pt. Metric Sockets 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24 mm
- 8 6pt. Metric Deep Sockets 10, 11, 12, 13, 14, 15, 17, 19 mm
- 3 Spark Plug Sockets 16, 18, 21 mm
- 6 Accessories Wobble Extension 10" 3/8"F x 1/4"M Adapter Universal Joint Bit Adapter Locking Extension Bar 3" 1/2"F x 3/8"M 3-Way Adapter



| Article Code | Length (mm) | Width (mm) | Hight (mm) | |
|--------------|-------------|------------|------------|---|
| ST09902SJ | 375.0 | 185.0 | 45.0 | 4 |

27 Pc. 1/2" Drive 6 Point Metric Socket Tray Set

CONTENTS:

- 1 Quick-Release Ratchet
- 17 6pt. Metric Sockets 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24, 27, 30, 32, 34 mm
- 5 6pt. Metric Deep Sockets 10, 13, 17, 19, 22 mm
- 4 Accessories
- Wobble Extension Bar 10" Universal Joint Locking Extension Bar 5" 3/8"F x 1/2"M 3-Way Adapter



| Article Code | Length (mm) | Width (mm) | Hight (mm) | |
|--------------|-------------|------------|------------|---|
| ST09903SJ | 375.0 | 185.0 | 45.0 | 4 |

26 Pc. 1/2" Drive 6 Point Metric Socket Tray Set

CONTENTS:

- 20 6pt. Metric Sockets 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 27,
- 30, 32 mm 5 - 6pt. Metric Deep Sockets 14, 17, 19, 21, 24 mm
- 1- Quick-Release Ratchet

| Article Code | Length (mm) | Width (mm) | Hight (mm) | \$ |
|--------------|-------------|------------|------------|-----------|
| ST09915SJ | 375.0 | 185.0 | 45.0 | 4 |

29 Pc. 3/8" Drive 6 Point SAE Socket Tray Set

CONTENTS:

- 11 6pt. SAE Sockets 1/4, 5/16, 3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8"
- 9 6pt. SAE Deep Sockets
- 3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8" 2 - Spark Plug Sockets 5/8, 13/16"
- 7 Accessories
- Quick-Release Ratchet Wobble Extension 10"
- Locking Extension 3"
- Universal loint
- 3/8"F x 1/4"M Adapter
- Bit Adapter 1/2"F x 3/8"M 3-Way Adapter

| Article Code | Length (mm) | Width (mm) | Hight (mm) | |
|--------------|-------------|------------|------------|---|
| ST09934 | 375.0 | 185.0 | 45.0 | 4 |

25 Pc. 1/2" Drive 6 Point SAE Socket Tray Set

CONTENTS:

15 - 6pt. SAE Sockets 5/16, 3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4,

- 13/16, 7/8, 15/16, 1, 1-1/16, 1-1/8, 1-1/4"
- 5 6pt. SAE Deep Sockets 1/2, 9/16, 5/8, 3/4, 13/16"
- 5 Accessories
- Quick-Release Ratchet Wobble Extension 10"
- Locking Extension 5"
- Universal Joint 3/8"F x 1/2"M 3-Way Adapter

| Article Code | Length (mm) | Width (mm) | Hight (mm) | |
|--------------|-------------|------------|------------|---|
| ST09528 | 375.0 | 185.0 | 45.0 | 4 |







10 Pc. Metric Open End and Combination Ratcheting Wrench Tray Set

CONTENTS:

- 2 Ratcheting Combination Wrenches 13, 14 mm 8 Double Open End Wrenches 6x7, 8x10, 10x12, 11x13, 12x14,
- 22x24, 24x27, 30x32 mm



| Article Code | Length (mm) | Width (mm) | Hight (mm) | |
|--------------|-------------|------------|------------|---|
| ST09904-02 | 375.0 | 185.0 | 45.0 | 4 |

10 Pc. Metric Offset Double Box End Wrench Tray Set

CONTENTS:

6x7, 8x10, 10x12, 11x13, 12x14, 14x17, 17x19, 19x21, 21x23, 24x27 mm



| Article Code | Length (mm) | Width (mm) | Hight (mm) | |
|--------------|-------------|------------|------------|---|
| ST09905 | 375.0 | 185.0 | 45.0 | 4 |

30 Pc. Metric Combination Wrench and Hex Key Tray Set

CONTENTS:

- 12 Combination Wrenches 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19 mm
- 9 Extra Long Ball Point Hex Key Set 1.5, 2, 2.5, 3, 4, 5, 6, 8, 10 mm
- 9 Long Arm Tamper-Proof Torx® Key Set T10, T15, T20, T25, T27, T30, T40, T45, T50



| Article Code | Length (mm) | Width (mm) | Hight (mm) | \$ |
|--------------|-------------|------------|------------|-----------|
| ST09906 | 375.0 | 185.0 | 45.0 | 4 |

8 Pc. Metric Combination Wrench Tray

CONTENTS: 5.5, 6, 7, 20, 21, 22, 23, 24 mm

| Article Code | Length (mm) | Width (mm) | Hight (mm) | \$ |
|--------------|-------------|------------|------------|-----------|
| ST09907 | 375.0 | 185.0 | 45.0 | 4 |

19 Pc. Metric Combination Ratcheting Wrench Tray Set

CONTENTS:

- 15 Ratcheting Combination Wrenches 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19 mm
- 1 Quick Release Adapter 1/4" Dr. 10 mm
- 1 Quick Release Adapter 3/8" Dr. 13 mm
- 1 Quick Release Adapter 1/2" Dr. 19 mm
- 1 Bit Adapter 1/4" Dr. 10 mm

| Article Code | Length (mm) | Width (mm) | Hight (mm) | |
|--------------|-------------|------------|------------|---|
| ST09908 | 375.0 | 185.0 | 45.0 | 4 |

19 Pc. Metric Double Ratcheting Combination Wrench Tray Set CONTENTS: 15 - Double Ratcheting Combination Wrenches 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19 mm 1 - 1/4" Dr. x 10 mm Quick Release Adapter 1-3/8" Dr. x 13 mm Quick Release Adapter 1 - 1/2" Dr. x 19 mm Quick Release Adapter 1 - 1/4" Dr. x 10 mm Bit Adapter

Article Code Length (mm) Wi ST08028 375.0

| et | | | | | |
|-----|------|--------|-----|-----|---|
| 100 | - | 2200 | 200 | 84 |) |
| 116 | 23 | 22:02 | 19 | 22 |) |
| | | 2211 | | 7.0 | |
| | | Calif. | | | |
| | Dian | | | aŭ. | |



| idth (mm) | Hight (mm) | |
|-----------|------------|---|
| 185.0 | 45.0 | 4 |

TOOL STORAGE

27 Pc. SAE Combination Wrench Tray Set

- CONTENTS: 9 Combination Wrenches 1/4", 5/16", 3/8", 7/16", 1/2", 9/16", 5/8", 11/16", 3/4" 1 9 Pc. Extra Long Ball Point Hex Key Set 1.5, 2, 2.5, 3, 4, 5, 6, 8, 10 mm 1 9 Pc.Long Arm Tamper-Proof Torx® Key Set T10, T15, T20, T25, T27, T30, T40, T45, T50



| Article Code | Length (mm) | Width (mm) | Hight (mm) | |
|--------------|-------------|------------|------------|---|
| ST08034E | 375.0 | 185.0 | 45.0 | 4 |

14 Pc. SAE Double Ratcheting Wrench Tray Set

CONTENTS:

- 10 Double Ratcheting Wrenches 5/16", 3/8", 7/16", 1/2", 9/16", 5/8", 11/16", 3/4", 13/16", 7/8"
 1 Quick Release Adapter 1/4" Dr. 10 mm
 1 Quick Release Adapter 3/8" Dr. 13 mm
 1 Quick Release Adapter 1/2" Dr. 10 mm

- 1 Quick Release Adapter 1/2" Dr. 19 mm
- 1 Bit Adapter 1/4" Dr. 10 mm



| Article Code | Length (mm) | Width (mm) | Hight (mm) | |
|--------------|-------------|------------|------------|---|
| ST09938 | 375.0 | 185.0 | 45.0 | 4 |

5 Pc. Adjustable Wrench and Pliers Tray Set

CONTENTS:

- 2 Adjustable Wrenches 8", 10"
- 1 Long Nose Pliers 6"
- 1 Curved Jaw Locking Pliers 7" 1 Long Nose Locking Pliers 6"



| Article Code | Length (mm) | Width (mm) | Hight (mm) | (|
|--------------|-------------|------------|------------|----------|
| ST09909-02 | 375.0 | 185.0 | 45.0 | 4 |

| | | n usage. Not | | |
|--|-----------------------------|----------------------------|--------------------|---|
| covered under I | Lifetime Warranty. | Width (mm) | Hight (mm) | |
| ST09910 | 375.0 | 185.0 | 45.0 | 4 |
| | | | | |
| | | | | |
| Article Code | Length (mm) | Width (mm) | Hight (mm) | |
| Article Code ST09911SJ | Length (mm) 375.0 | Width (mm) 185.0 | Hight (mm) 45.0 | |
| | 375.0 Tray Set | | | |
| ST09911SJ 4 Pc. Pliers CONTENTS: 1 - Long Nose 6" 1 - Diagonal 6" 1 - Linesman 8" | 375.0 Tray Set | | | |

| CONTENTS: 1 - Flat File 8" 1 - Half-Round File 8" 1 - Round File 8" 1 - Three Square File 1 - Square File 8" 3 - 140 mm Needle Fi | 8" iles - Flat, Half Round, Round roduct is subject to wear and tear upo | n usage. Not | | |
|---|--|----------------------------|---------------------------|-----------|
| Article Code | Lifetime Warranty. | Width (mm) | Hight (mm) | \$ |
| ST09910 | 375.0 | 185.0 | 45.0 | 4 |
| | | | | |
| | | | | |
| Article Code | Length (mm) | Width (mm) | Hight (mm) | \$ |
| | Length (mm) 375.0 | Width (mm) 185.0 | Hight (mm) 45.0 | 4 |
| stoggiisj 4 Pc. Pliers | 375.0 Tray Set | | | |
| ST09911SJ 4 Pc. Pliers CONTENTS: 1 - Long Nose 6" 1 - Diagonal 6" 1 - Linesman 8" | 375.0 Tray Set | | | |

| Noture of this p | - , | nusage Not | | |
|---|----------------------------------|--------------------------|--------------------|-----------|
| Article Code | Lifetime Warranty. | Width (mm) | Hight (mm) | \$ |
| ST09910 | 375.0 | 185.0 | 45.0 | 4 |
| 1 - Internal Straight 7 1 - Internal Curved 7* | | | | |
| | | | | |
| | | Width (mm) | Hight (mm) | |
| 1- Internal Curved 7* Article Code | | Width (mm) 185.0 | Hight (mm) 45.0 | |
| 1 - Internal Curved 7 | Length (mm) 375.0 Tray Set | | - | |
| 1 - Internal Curved 7" Article Code ST09911SJ APPC. Pliers CONTENTS: 1 - Long Nose 6" 1 - Diagonal 6" 1 - Linesman 8" | Length (mm) 375.0 Tray Set | | - | |

| CONTENTS: 1 - Flat File 8" 1 - Half-Round File 8" 1 - Round File 8" 1 - Three Square File 1 - Square File 8" 3 - 140 mm Needle Fi | : 8" iles - Flat, Half Round, Round | n usage. Not | | |
|---|--|----------------------------|---------------------------|-----------|
| Article Code | product is subject to wear and tear upo Lifetime Warranty. Length (mm) | Width (mm) | Hight (mm) | \$ |
| ST09910 | 375.0 | 185.0 | 45.0 | 4 |
| | | | | |
| | | | | |
| Article Code | Length (mm) | Width (mm) | Hight (mm) | |
| Article Code ST09911SJ | Length (mm) 375.0 | Width (mm) 185.0 | Hight (mm) 45.0 | |
| stoggiisj 4 Pc. Pliers | 375.0 Tray Set | | - | |
| ST09911SJ 4 Pc. Pliers CONTENTS: 1 - Long Nose 6" 1 - Diagonal 6" 1 - Linesman 8" | 375.0 Tray Set | | - | |

13 Pc. Combination Screwdriver Tray Set

CONTENTS:

- 4 Precision Slotted 1.0x40 mm, 2.0x40 mm, 2.4x40 mm, 3.0x40 mm
- 2 Precision Phillips #0x40 mm, #3x40 mm
- 3 T-Series Slotted 3x75 mm, 5x75 mm, 6x100 mm
- 4 T-Series Phillips #0x75 mm, #1x75 mm, #2x100 mm, #3x150 mm



| Article Code | Length (mm) | Width (mm) | Hight (mm) | \$ |
|--------------|-------------|------------|------------|-----------|
| ST09913SJ | 375.0 | 185.0 | 45.0 | 4 |

36 Pc. 3/8" and 1/2" Drive 6 Point Metric Impact Socket Tray Set

CONTENTS:

- 16 1/2" Dr. Metric Impact Sockets 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24, 27, 30, 32 mm
- 13 3/8" Dr. Metric Impact Sockets 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19 mm
- 1-3/8" Dr. Impact Extension Bar 3"
- 1 1/2" Dr. Impact Extension Bar 6"
- 1 1/4"F x 3/8"M Impact Adapter
- 1 1/2"F x 3/8"M Impact Adapter
- 1-3/8"F x 1/2"M Impact Adapter
- 1 3/4"F x 1/2"M Impact Adapter 1-1/2" Dr. Impact Universal Joint



| Article Code | Length (mm) | Width (mm) | Hight (mm) | \$ |
|--------------|-------------|------------|------------|-----------|
| ST09914SJ | 375.0 | 185.0 | 45.0 | 4 |

4 Pc. Striking Tool Tray Set

CONTENTS:

- 1-5 Pc. Punch Set
- 1 32 Pc. Feeler Gauge Set
- 1 Hickory Ball Pein Hammer 24 oz
- 1 Hickory Soft Face Hammer 35 mm



| Article Code | Length (mm) | Width (mm) | Hight (mm) | \$ |
|--------------|-------------|------------|------------|-----------|
| ST09932A | 375.0 | 185.0 | 45.0 | 4 |

68 Pc. VDE Tool Set



CONTENTS:

- 2 3/8", 1/2" Drive Insulated Quick-Release Teardrop Ratchets
- 8 3/8" Drive 6 Point VDE Insulated Sockets 8, 10, 12, 13, 14, 16, 17, 18
- 11 1/2" Drive 6 Point VDE Insulated Sockets 10, 11, 12, 13, 14, 16, 17, 19, 21, 22, 24
- 5 1/2" Drive VDE Insulated Hex Bit Sockets 4, 5, 6, 8, 10 mm
- 13 VDE Insulated Open End Wrenches 8, 10, 12, 13, 14. 15, 16, 17, 18, 19, 21, 22, 24 mm
- 13 VDE Insulated Single Offset Ring Wrenches 8, 10, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24 mm
- 1 VDE Insulated Adjustable Wrench 8"
- 6 T-Series VDE Insulated Screwdriver Phillips #0x60 mm, #1x80 mm, #2x100 mm Slotted 2.5x75 mm, 4.0x100 mm, 5.5x125 mm
- 1- VDE Insulated Long Nose Pliers 8"
- 1 VDE Insulated Diagonal Pliers 7"
- 1 VDE Insulated Linesman Pliers 8"
- 1 VDE Cable Knife
- 2 Accessories
- 1/2" Drive VDE Insulated T-Handle 1/2" Drive VDE Insulated Wobble Extensions 5", 10"





| Please refer to the warranty terms of the indiv | | er to the warranty terms of the individual p | roduct | |
|---|------|--|-------------|--|
| | Arti | cle Code | Length (mm) | |

577.0

| | Please ref | er to the warranty te |
|-----|------------|-----------------------|
| Art | ticle Code | l enat |

SC09928

01

Fits ST95125 4 Drawer Roller Cabinet 27" and ST95126 6 Drawer Roller Cabinet 27"

ST95125

| Width (mm) | Hight (mm) | |
|------------|------------|---|
| 404.0 | 30.0 | 1 |

ST95126

187 Pc. Automotive Master Tool Set

CONTENTS:

- 3 1/4", 3/8", 1/2" Drive Quick-Release Ratchets 10 - 1/4" Drive 6 Point Sockets 4, 5, 6, 7, 8, 9, 10, 11, 12, 13 mm 4 - 1/4" Drive 6 Point Deep Sockets 8, 9, 10, 12 mm 9 - 3/8" Drive 6 Point Sockets 11, 12, 13, 14, 15, 16, 17, 18, 19 mm 4 - 3/8" Drive 6 Point Deep Sockets 13, 14, 15, 17 mm 8 - 3/8" Drive External Torx Sockets E8, E10, E11, E12, E14, E16, E18, E20 3 - 3/8" Drive Metric Spark Plug Sockets 14, 16, 21 mm 7 - 1/2" Drive 6 Point Sockets 20, 21, 22, 24, 27, 30, 32 mm 2 - 1/2" Drive 6 Point Thin Wall Impact Deep Sockets 17, 19 mm 3 - 3/8" Drive Torx[®] Bit Sockets T20, T30, T40 4 - 3/8" Drive Tamper Proof Torx® Bit Sockets T45, T50, T55, T60 4 - 3/8" Drive Hex Bit Sockets 3, 4, 5, 6 mm 2 - 3/8" Drive Pozidriv Bit Sockets #1, #2 2 - 3/8" Drive Phillips Bit Sockets #1, #2 2 - 3/8" Drive Slotted Bit Sockets 5.5, 6.5 mm 3 - 1/4" Drive 25L Bits Slotted 4.0, 5.0, 6.5 mm 2 - 1/4" Drive 25L Bits Phillips #1, #3 4 - 1/4" Drive 25L Bits Hex 3, 4, 5, 6 mm 11 - Combination Wrenches 8, 9, 10, 11, 12, 13, 14, 16, 17, 18, 19 mm 5 - Flare Nut Wrenches 8x10, 9x11, 10x12, 13x14, 16x17 mm 2 - Adjustable Wrenches 8", 10" 2 - Acetate Go-Through Screwdrivers Slotted 6x150 mm Phillips #2x150 mm 9 - Acetate Screwdrivers Torx® T20x100 mm, T25x100 mm, T30x100 mm Slotted 3.2x75 mm, 5x100 mm, 6x150 mm Phillips #0x75 mm, #1x100 mm, #2x150 mm 1 - 10 Pc. Metric Long Hex Key Set 1 - 9 Pc. Tamper-Proof Torx Key Set 1 - Long Nose Pliers 6" 1 - Diagonal Pliers 6" 1 - Linesman Pliers 8" 2 - External Snap Ring Pliers, Straight 7", Curved 7"
- 2 Internal Snap Ring Pliers, Straight 7", Curved 7"

1 - Curved Jaw Locking Pliers 10" 1 - Wire Stripper Cutting Pliers 6" 1- T52 Engine Cylinder Head Screw Bit Socket 1 - M16 Oil Pan Drain Bit Socket 1 - H17 Oil Pan Bit Socket 1 - Universal 3-Jaw Oil Filter Wrench 1 - Automotive Circuit Tester 6V/12V/24V 1- Shock Absorber Removal Socket 1 - Plastic Snap-off Knife, 8-point, 18x100 mm 1 - Flexible Magnetic Pick-Up Tool 2 - Oil Filter Wrenches 55-75 mm, 75-95 mm 1 - Wood Handle Putty Scrape 1 - 14 Pc. Feeler Gauge Set 0.05-1.00 mm 1 - 5 Pc. Punch Set 1 - Fiberglass Ball Pein Hammer 680g / 24oz 1 - 1 - 1/2" Air Impact Wrench 1 - Low Speed Air Tire Buffer 1-5 Pc. Fine Threaded Extractor Set 1 - Multi-Purpose Scissors 8" 1 - Mini Digital Multimeter 13 - Accessories 1/4", 3/8", 1/2" Drive Universal Joints 3/8" Drive Adapter 1/4" 3/8" Drive 3-Way Adapter 1/2 1/2" Drive 3-Way Adapter 3/8" I/4" Drive Wobble Extensions 2" 3/8" Drive Wobble Extension 3", 6" 1/2" Drive Wobble Extensions 5", 10" 1/4" Drive Spinner Handle 1/4" Drive Bit Adapter

1 - Slip Joint Pliers 8"

Not included: Pen Type Dual-lighting Rechargeable LED Work Light









Fits ST95125 4 Drawer Roller Cabinet 27" and ST95126 6 Drawer Roller Cabinet 27"



CONTENTS:

- 3 1/4", 3/8", 1/2" Drive Quick-Release Ratchets
- 12 1/4" Drive 6 Point Sockets 4, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14 mm
- 14 3/8" Drive 6 Point Sockets 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19 mm
- 9 3/8" Drive 6 Point Deep Sockets 8, 10, 11, 12, 13, 14, 15, 17, 19 mm
- 10 3/8" Drive External Torx Socket E4, E5, E6, E7, E8, E10, E11, E12, E14, E16
- 2 3/8" Drive Metric Spark Plug Sockets 16, 21 mm
- 18 1/2" Drive 12 Point Sockets 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 27, 30, 32 mm
- 2 1/2" Drive 6 Point Thin Wall Impact Deep Sockets 17, 19 mm
- 3 1/4" Drive Phillips Bit Sockets #1, #2, #3
- 3 1/4" Drive Slotted Bit Sockets 4.0, 5.0, 6.5 mm
- 6 1/4" Drive Hex Bit Sockets 3, 4, 5, 6, 7, 8 mm
- 7 1/4" Drive Torx® Bit Sockets T8, T10, T15, T20, T25, T30, T40
- 5 3/8" Drive Hex Bit Sockets 5, 6, 7, 8, 10 mm
- 1-3/8" Drive Long Hex Bit Socket 9 mm
- 9 3/8" Drive Torx® Bit Socket T15, T20, T25, T27, T30, T40, T45, T50, T55
- 2 1/2" Drive Triple Square Bit Sockets M10, M12
- 2 1/2" Drive Long Triple Square Bit Sockets M8, M10, M12, M14
- 3 1/2" Drive Hex Bit Sockets 12, 14, 19 mm
- 17 Combination Wrenches 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24 mm
- 4 Deep Offset Double Box End Wrenches 10x11, 12x13, 16x17, 18x19 mm
- 6 Flex Head Ratcheting Wrenches 8, 10, 13, 15, 16, 18 mm
- 3 Flare Nut Wrenches 9x11, 13x14, 16x17 mm
- 1 Adjustable Wrench 10"
- 2 Acetate Go-Through Screwdrivers Slotted 6x150 mm Phillips #2x150 mm
- 1 10 Pc. Metric Long Hex Key Set
- 1-9 Pc. Tamper-Proof Torx Key Set
- 16 Acetate Screwdrivers Torx® T8x75, T10x 100, T15x100, T20x100 mm,

T25x100 mm, T27x100, T30x100, T40x100 mm Slotted 3.2x75 mm, 5x100 mm, 5x300 mm, 6x150 mm Phillips #0x75 mm, #1x75 mm, #2x150 mm, #2x3⁰⁰ mm







Please refer to the warranty terms of the individual product

| Article Code | Length (mm) | Width (mm) | Hight (mm) | |
|--------------|-------------|------------|------------|---|
| SC09947-1 | 577.0 | 404.0 | 30.0 | 1 |

Please refer to the warranty terms of the individual product

| Α | rticle Code | Length (mm) | Width (mm) | Hight (mm) | \$ |
|---|-------------|-------------|------------|------------|-----------|
| S | C09946-1 | 577.0 | 404.0 | 30.0 | 1 |



- 1 Long Nose Pliers 6"
- 1 Diagonal Pliers 6"
- 1 Linesman Pliers 8"
- 1 Slip Joint Pliers 8"
- 1 Groove Joint Pliers 10"
- 1 Curved Jaw Locking Pliers 10"
- 1 German Style External Snap Ring Pliers, Straight 7"
- 1- German Style Internal Snap Ring Pliers, Straight 7"
- 1- T52 Engine Cylinder Head Screw Bit Socket
- 1 M16 Oil Pan Drain Bit Socket
- 1 H17 Oil Pan Bit Socket
- 2 End Cap Oil Filter Wrenches 36, 74 mm
- 1 14 Pc. Feeler Gauge Set 0.05-1.00 mm
- 1 Multi-Purpose Scissors 8"
- 1 Flexible Magnetic Pick-Up Tool
- 1 Air Blow Gun 250 mm
- 1 Prv Bars Driver
- 1 Tape Measure Metric/SAE Scale 5 m/16ft x 19 mm
- 1 Fiberglass Ball Pein Hammer 680g / 24oz
- 1 Dead Blow Soft Rubber Hammer 55 mm
- 1-5 Pc. Punch Set
- 1-5 Pc. Interior Trims Remover Set
- 1 Plastic Snap-off Knife, 13-point, 9x80 mm
- 13 Accessories: 1/4" Drive Spinner Handle 1/4", 1/2" Drive Universal Joint 1/4" Drive Wobble Extensions 2", 4" 3/8" Drive Wobble Extensions 3", 6",10 " 1/2" Drive Wobble Extensions 5", 10" 3/8" Drive Adapter 1/2" 3/8" Drive 3-Way Adapter 1/2"
 - 1/2" Drive Flex Handle / Breaker Bar 15"

Fits ST95126 6 Drawer Roller Cabinet 27"

249 Pc. Master Body Tool Set

CONTENTS:

- 3 1/4", 3/8", 1/2" Dr. Quick-Release Ratchets
- 13 1/4" Drive 6 Point Sockets 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14 mm
- 12 3/8" Drive 6 Point Sockets 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19 mm
- 13 3/8" Drive 6 Point Deep Sockets 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20,
- 21, 22 mm 2 - 3/8" Drive Metric Spark Plug Sockets 14, 16, 21 mm
- 20 1/2" Drive 6 Point Sockets 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 27, 30, 32 mm
- 19 Combination Wrenches 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 27 mm
- 1 Adjustable Wrench 10"
- 1-9 Pc. Metric Extra Long Ball Point Hex Key Set
- 1-9 Pc. Tamper-Proof Torx Key Set
- 2 Acetate Go-Through Screwdrivers Slotted 6x150 mm
- Phillips #2x150 mm
- 8 Acetate Screwdrivers Slotted 3.2x75 mm, 5x100 mm, 6x38 mm, 6x100 mm
- Phillips #0x75 mm, #1x75 mm, #2x38 mm, #2x100 mm
- 5 Drive 30L Bits Slotted 5.5, 6.5, 8, 10, 12 mm
- 1 Drive 70L Long Bit Slotted 8 mm
- 3 Drive 30L Bits Phillips #1, #2, #3
- 1 Drive 70L Long Bit Phillips #2
- 8 Drive 30L Bits Tamper Proof Torx® T20, T25, T30, T40, T45, T50, T55, T60
- 8 Drive 70L Long Bits Torx[®] T20, T25, T27, T30, T40, T45, T50, T55
- 5 Drive 30L Bits Triple Square M5, M6, M8, M10, M12
- 7 Drive 70L Long Bits Triple Square M5, M6, M8, M10, M12, M14, M16
- 7 Drive 30L Bits Hex 4, 5, 6, 7, 8, 10, 12 mm
- 8 Drive 70L Long Bits Hex 4, 5, 6, 7, 8, 10, 12, 14 mm
- 1 Long Nose Pliers 6"
- 1 Diagonal Pliers 6"
- 1 Linesman Pliers 8"
- 1 Slip Joint Pliers 8"

28

- 1 Curved Jaw Locking Pliers 10"
- 2 German Style External Snap Ring Pliers, Straight 7", Curved 7"
- 2 German Style Internal Snap Ring Pliers, Straight 7", Curved 7"
- 1 Long Nose Locking Pliers 9"
- 1 Welding Clamp Locking Pliers 9"
- 1- Metal Sheet Clamp Locking Pliers 8"
- 1 C-Clamps Locking Pliers 11"

- 1 Flat File 8" Second Cut
- 1 Half Round File 8" Second Cut
- 1 Round File 8" Second Cut
- 1 Triangular File 8" Second Cut
- 1 Diamond Pointed Flat File 3x140 mm
- 1 Diamond Pointed Half-Round File 3x140 mm
- 1 Diamond Pointed Round File 3x140 mm
- 1 T52 Engine Cylinder Head Screw Bit Socket
- 1 M16 Oil Pan Drain Bit Socket
- 1 H17 Oil Pan Bit Socket
- 1 Oil Filter Wrench 63-102 mm
- 1 Automotive Circuit Tester 6V/12V/24V
- 1 14 Pc. Feeler Gauge Set 0.05-1.00 mm
- 1 Flexible Magnetic Pick-Up Tool
- 1 Fiberglass Ball Pein Hammer 680g / 24oz
- 1 Dead Blow Soft Rubber Hammer 55 mm
- 1 Curved Pein and Finishing Hammer
- 1 Straight Pein and Finishing Hammer
- 1 Pick and Finishing Hammer
- 1 Anvil Dolly
- 1 Wedge Dolly
- 1 Toe Dolly
- 1 Pry Bumping Spoon
- 1- Wood Handle Putty Scraper
- 1 5 Pc. Punch Set
- 1 5 Pc. Fine Threaded Tap Extractor Set
- 1 5 Pc. Handy Remover Set
- 1 Air Blow Gun 100 mm
- 1 Tape Measure Metric/SAE Scale 5 m/16ft x 19 mm
- 1 Plastic Snap-off Knife, 13-point, 9x80 mm
- 16 Accessories:
- 1/4", 3/8", 1/2" Drive Universal Joint 1/4" Drive Wobble Extensions 2", 4" 3/8" Drive Wobble Extensions 3", 6" 1/2" Drive Wobble Extensions 5", 10" 1/4" Drive Flex Extension 1/4" Drive Adapter 3/8" 3/8" Drive Adapter 1/2" 1/2" Drive Adapter 3/8" 1/2" Drive OffSet Handle 3/8", 1/2" Drive Bit Adapter 5/16"



Please refer to the warranty terms of the individual product

Fits ST95126 6 Drawer Roller Cabinet 27"

| Article Code | Length (mm) | Width (mm) | Hight (mm) | \$ |
|--------------|-------------|------------|------------|-----------|
| SC09930-1 | 577.0 | 404.0 | 30.0 | 1 |

368 Pc. Master Tool Set

CONTENTS:

- 3 1/4", 3/8", 1/2" Dr. Quick-Release Ratchets
- 13 1/4" Drive 6 Point Sockets 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14 mm
- 10 1/4" Drive 6 Point Deep Sockets 4, 5, 6, 7, 8, 9, 10, 11, 12, 13 mm
- 12 3/8" Drive 6 Point Sockets 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19 mm
- 10 3/8" Drive 6 Point Deep Sockets 8, 9, 10, 11, 12, 13, 14, 15, 17, 19 mm
- 8 3/8" Drive External Torx Socket E8, E10, E11, E12, E14, E16, E18, E20
- 20 1/2" Drive 6 Point Sockets 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 27,
- 20 1/2 DITVE O POINT SOUCKELS 6, 9, 10, 11, 12, 13, 14, 13, 10, 17, 16, 19, 20, 21, 22, 23, 24, 27 30, 32 mm 0. 1/2 Drive 12 Drive 12 Contents 0, 0, 10, 11, 12, 17, 14, 15, 16, 17, 10, 10, 20, 21, 22, 23, 24, 27
- 20 1/2" Drive 12 Point Sockets 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 27, 30, 32 mm
- 14 1/2" Drive 6 Point Deep Sockets 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 24 mm
- 4 1/2" Drive 12 Point Deep Sockets 10, 12, 17, 19 mm
- 3 3/8" Drive Spark Plug Sockets 14, 16, 21 mm
- 4 1/2" Drive 6 Point Impact Sockets 17, 19, 21, 23 mm
- 3 1/4" Drive Slotted Bit Sockets 4.0, 5.5, 6.5 mm
- 2 3/8" Drive Slotted Bit Sockets 5.5, 6.5 mm
- 3 1/4" Drive Phillips Bit Sockets #1, #2, #3
- 3 3/8" Drive Phillips Bit Sockets #1, #2, #3
- 7 1/4" Drive Torx® Bit Sockets T8, T10, T15, T20, T25, T27, T30, T40
- 9 3/8" Drive Torx® Bit Sockets T10, T15, T20, T25, T27, T30, T40; T45, T50
- 6 1/4" Drive Hex Bit Sockets 3, 4, 5, 6, 7, 8 mm

1-9 Pc. Metric Extra Long Ball Point Hex Key Set

Phillips #0x75 mm, #1x75 mm, #2x38 mm, #2x100 mm

5 - Drive 30L Bits Triple Square M5, M6, M8, M10, M12

5 - Drive 70L Long Bits Triple Square M5, M6, M8, M10, M12

000000000

00000000000

0000000

Please refer to the warranty terms of the individual product

Length (mm)

577.0

6 - Drive 30L Bits Tamper Proof Torx® T20, T25, T30, T40, T45, T50

8 - Drive 70L Long Bits Torx® T20, T25, T27, T30, T40, T45, T50, T55

1 - Adjustable Wrenches 10"

1-9 Pc. Tamper-Proof Torx Key Set

Phillips #3x150 mm, 3x200 mm

0000

00000000

Article Code

SC09931-1

0

0 0

- 7 3/8" Drive Hex Bit Sockets 3, 4, 5, 6, 7, 8, 10 mm
- 23 Combination Wrenches 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 27, 30, 32 mm
- 13 Double Open End Wrenches 6x7, 8x10, 10x12, 12,14, 13x15, 13x16, 14x17, 16x18, 17x19, 19x21, 22x24, 24x27, 30x32 mm


2 - Acetate Go-Through Screwdrivers Slotted 6x150 mm, Phillips #2x150 mm

8 - Acetate Screwdrivers Slotted 3.2x75 mm, 5x100 mm, 6x38 mm, 6x100 mm

4 - Cushion Grip Go-Through Screwdrivers Slotted 8x150 mm, 8x200 mm

 Deep Offset Double Box End Wrenches 10x12, 12x14, 13x15, 13x16, 14x17, 16x18, 17x19, 19x21, 19x22, 22x24, 24x27
 Pipe Wrench 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17 mm

- 7 Drive 30L Bits Hex 4, 5, 6, 7, 8, 10, 12 mm
- 7 Drive 70L Long Bits Hex 4, 5, 6, 7, 8, 10 mm
- 1 Long Nose Pliers 6"
- 1 Diagonal Pliers 6"
- 1 Linesman Pliers 8"
- 1- Slip Joint Pliers 8"
- 1 Curved Jaw Locking Pliers 10"
- 2 German Style External Snap Ring Pliers, Straight 7", Curved 7"
- 2 German Style Internal Snap Ring Pliers, Straight 7", Curved 7"
- 1- T52 Engine Cylinder Head Screw Bit Socket
- 1 M16 Oil Pan Drain Bit Socket
- 1 H17 Oil Pan Bit Socket
- 1 Flexible Magnetic Pick-Up Tool
- 1-5 Pc. Interior Trims Remover Set
- 1-5 Pc. Punch Set
- 1-5 Pc. Fine Threaded Tap Extractor Set
- 1 Pry Bars Driver
- 1 Automotive Circuit Tester 6V/12V/24V
- 1 Air Blow Gun 100 mm
- 1 Oil Filter Wrench 63-102 mm
- 1 14 Pc. Feeler Gauge Set 0.05-1.00 mm
- 1 Fiberglass Ball Pein Hammer 680g / 24oz
- 1 Dead Blow Soft Rubber Hammer 55 mm
- 1 Tape Measure Metric/SAE Scale 5 m/16ft x 19 mm
- 1 Plastic Snap-off Knife, 13-point, 9x80 mm
- 24 Accessories: 1/4" Drive Spinner Handle 1/4", 3,8", 1/2" Drive Universal Joint 1/4" Drive Wobble Extensions 2", 4" 3/8" Drive Wobble Extensions 3", 6",10 " 1/2" Drive Wobble Extensions 5", 10" 1/2" Drive OffSet Handle 1/4", 3,8", 1/2" Drive T-Handle 1/4" Drive Adapter 3/8" 3/8" Drive Adapter 1/4" 3/8" Drive Adapter 1/2" 1/2" Drive Adapter 3/8" 3/8" Drive 3-Way Adapter 1/2" 1/2" Drive 3-Way Adapter 3/8" 3/8" Drive Bit Adapter 5/16" 1/2" Drive Bit Adapter 5/16"

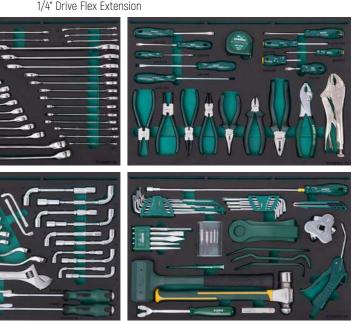


Fits ST95126 6 Drawer Roller Cabinet 27"


| Width (mm) | Hight (mm) | |
|------------|------------|---|
| 404.0 | 30.0 | 1 |

94 Pc. Tire Maintenance Tool Set

CONTENTS:

- 2 3/8", 1/2" Drive Quick-Release Ratchets
- 8 3/8" Drive 6 Point Sockets 8, 9, 10, 11, 12, 13, 14, 16 mm
- 14 1/2" Drive 6 Point Sockets 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 27 mm
- 7 1/2" Drive 6 Point Deep Sockets 16, 17, 18, 19, 20, 21, 22 mm
- 2 3/8" Drive Metric Spark Plug Sockets 16, 21 mm
- 5 1/2" Drive 6 Point Impact Sockets 17, 19, 21, 22, 23 mm
- 15 Combination Wrenches 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 24, 25 mm
- 4 Double Box End Wrenches 8x10, 11x13, 12x14, 17x19 mm
- 1 Adjustable Wrench 10"
- 2 Heavy Duty Pipe Wrenches 8", 10"
- 4 Acetate Screwdrivers Slotted 3.2x75, 6x100 mm Phillips #0x75, #2x100 mm
- 2 Cushion Grip Go-Through Screwdrivers Slotted 6x150 mm Phillips #2x150 mm
- 1 Long Nose Pliers 6"
- 1 Diagonal Pliers 6"
- 1 Linesman Pliers 8"
- 1 Wire and Cable Cutting Pliers 10"
- 1- Slip Joint Pliers 8"
- 1 Curved Jaw Locking Pliers 10"
- 1- Multi-Purpose Scissors 8"
- 1 Zinc Alloy Snap-Off Knife, 13-Point, 9x80 mm
- 1 Tape Measure Metric/SAE Scale 5 m/16 ft x 19 mm
- 1 Aluminum Alloy Flashlight (incl. 3 AAA batteries)
- 1 Wood Handle Putty Scraper
- 1 Flat Beam Torque Wrench 0-300 Nm
- 1 Cross Wheel Wrench 16"
- 1 Air Tire Buffer
- 1 Air Blow Gun 250 mm
- 1 1/2" Heavy Duty Air Impact Wrench
- 1 Wheel Weight Pliers
- 1 Universal 3-Jaw Oil Filter Wrench
- 10 Accessories
 - 3/8" Drive 3-Way Adapter 1/2" 1/2" Drive 3-Way Adapter 3/8" 3/8" Drive Wobble Extension 3", 6" 1/2" Drive Wobble Extensions 5", 10"
 - 1/2" Drive T-Handle
 - 3/8" Drive Universal Joint
 - 1/2" Drive Universal Joint
- 1/2" Drive Impact Universal Joint

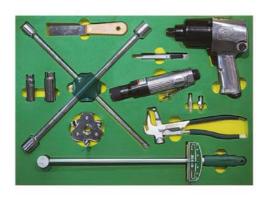

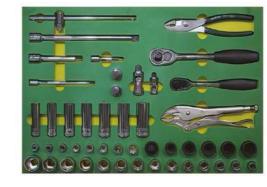







Please refer to the warranty terms of the individual product

Fits ST95121 5 Drawer Roller Cabinet 28" and ST95107SC 7 Drawer Roller Cabinet 31"

| Article Code | Length (mm) | Width (mm) | Hight (mm) | |
|--------------|-------------|------------|------------|---|
| SC09920 | 570.0 | 375.0 | 30.0 | 1 |

103 Pc. General Tool Set

CONTENTS:

- 2 1/4", 1/2" Dr. Quick-Release Ratchets
- 7 1/4" Dr. 6pt. Metric Sockets 5, 5.5, 6, 7, 8, 9, 10 mm
- 12 1/2" Dr. 12pt. Metric Sockets 8, 10, 11, 12, 13, 17, 19, 20, 22, 24, 30, 32 mm
- 1-1/2" Dr. 6pt. Metric Deep Socket 17 mm
- 16 1/4" Dr. Bit Sockets Hex 3, 4, 5, 6, 8 mm
 - Phillips #1, #2

Slotted 4, 5.5, 6.5 mm

- Torx[®] T10, T15, T20, T25, T30, T40
- 4 1/2" Dr. Long Bit Sockets Torx® T25, T27, T30, T40 6 1/2" Dr. Long Bit Sockets Hex 5, 6, 7, 8, 12, 14 mm
- 9 Double Open End Wrenches 8x10, 10x12, 11x13, 12x14, 14x17, 16x18, 17x19, 21x23, 22x24 mm
- 13 Acetate Screwdrivers Torx® T10x100, T15x100, T20x100, T25x100, T27x100, T30x100 mm
 - Slotted 6x38, 3.2x75, 5x100, 6x150 mm
 - Phillips #1x75, #2x38, #2x100 mm
- 2 T-Series Go-Through Screwdrivers Slotted 8x150 mm
 - Phillips #3x150 mm
- 1 Adjustable Wrench 8"
- 1 Curved Jaw Quick-Release Pliers 10"
- 1 Long Nose Locking Pliers 6"
- 1 Metal Sheet Clamping Locking Pliers 8"
- 1 C-Clamp Locking Pliers 11"
- 1 Plastic Rivet Removal Pliers
- 1 Standard Bumping Hammer 310 g
- 1 Curved Pein and Finishing Hammer 305 g
- 1 Hickory Dead Blow Hammer 40 mm
- 1 Hickory Ball Pein Hammer 24 oz
- 3 Dollies Anvil, Wedge, Toe
- 2 Aviation Snips Left Cut 10", Right Cut 10"
- 1 Aluminum Hack Saw 12"
- 1 Pinch Bar 18x400 mm
- 4 Files 6" Half Round Bastard Cut; 6" Half Round Smooth Cut 6" Round Second Cut; 6" Three Square Second Cut
- 9pc. Metric Long Arm Ball Point Hex Key Set 1/4" Dr. Wobble Extension Bars 2", 4"

- 1/2" Dr. Wobble Extension Bars 5", 10"
- 1/4", 1/2" Dr. Universal Joints



Please refer to the warranty terms of the individual product


| Article Code | Length (mm) | W |
|--------------|-------------|---|
| ST95208S | 570.0 | |

10 - Accessories 1/4" Dr. Spinner Handle 1/4" Dr. T-Handle 1/2" Dr. T-Handle



171 Pc. General Tool Set

CONTENTS: 3 - 1/4", 3/8", 1/2" Dr. Quick-Release Ratchets 10 - 1/4" Dr. 6pt. Metric Sockets 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13 mm 3 - 1/4" Dr. 6pt. Metric Deep Sockets 6, 7, 10 mm 9 - 3/8" Dr. 6pt. Metric Sockets 8, 9, 10, 11, 12, 13, 14, 15, 16 mm 3 - 3/8" Dr. 6pt. Metric Deep Sockets 13, 15, 16 mm 10 - 1/2" Dr. 6pt. Metric Sockets 10, 14, 15, 16, 17, 18, 19, 21, 22, 27 mm 2 - 1/2" Dr. 6pt. Metric Deep Sockets 17, 19 mm 11 - 1/2" Dr. 12pt. Metric Sockets 10, 11, 12, 13, 17, 19, 20, 22, 24, 30, 32 mm 4 - 1/4" Dr. Bit Sockets Hex 5, 6 mm; Pozidriv #2; Slotted 5.5 mm 5 - 3/8" Dr. Bit Sockets Torx® T10, T15, T20, T25, T30 5 - 1/2" Dr. Bit Sockets Hex 5, 6, 7, 8, 10 mm 4 - 1/2" Dr. Long Bit Sockets Torx® T25, T27, T30, T45 6 - 1/2" Dr. Long Bit Sockets Hex 5, 6, 7, 8, 12, 14 mm 3 - 1/2" Dr. Long Bit Sockets Triple Square M6, M8, M10 4 - 1/2" Dr. 6pt. Metric Impact Sockets 17, 19, 21, 22 mm 16 - Combination Wrenches 7, 10, 11, 12, 13, 14, 15, 16, 17, 19, 20, 21, 22, 23, 24, 27 mm 9 - Double Open End Wrenches 8x10, 10x12, 11x13, 12x14, 14x17, 16x18, 17x19, 21x23, 22x24 mm 7 - Deep Offset Double Box End Wrenches 8x9, 10x11, 12x13, 14x15, 18x19, 20x22, 24x27 mm 15 - Acetate Screwdrivers Torx® T10x100, T15x100, T20x100, T25x100, T27x100, T30x100 mm Slotted 6x38, 3.2x75, 5x100, 6x150, 8x150 mm Phillips #1x75, #2x38, #2x100, #3x150 mm 1 - Slip Joint Pliers 8" 1 - Long Nose Pliers 6" 1 - Diagonal Pliers 5" 1 - Linesman Pliers 7" 1 - External Snap Ring Straight Pliers 7" 1 - External Snap Ring Curved Pliers 7" 1 - Internal Snap Ring Straight Pliers 7" 1 - Internal Snap Ring Curved Pliers 7" 1 - Hickory Ball Pein Hammer 24 oz 1 - Air Blow Gun 100 mm 1 - 1/2" Dr. Air Impact Wrench 5 - End Cap Oil Filter Wrench 65, 74, 76, 90, 93 mm 1 - Universal 3-Jaw Oil Filter Wrench 63-102 mm 1 - Oil Filter Wrench 75-95 mm 1 - Dial Torque Wrench 300 Nm 22 - Accessories 9pc. Metric Long Arm Ball Point Hex Key Set 16pc. Feeler Gauge Set 1/4" Dr. Wobble Extension Bars 2", 4" 1/4" Dr. Spinner Handle 1/4" Dr. Flex Extension Bar 6" 3/8" Dr. Locking Extension Bar 6", 10" 3/8" Dr. Spark Plug Sockets 16, 21 mm 3/8" Dr. Flex Extension Bar 8" 1/2" Dr. Wobble Extension Bars 5", 10" 1/2" Dr. T-Handle 1/4", 3/8", 1/2" Dr. Universal Joints 3/8"F x 1/4"M, 1/2"F x 3/8"M Socket Adapters Japanese Style Plug R1/4" Flexible Magnetic Pickup Tool 400 mm x 1 kg T-Handle 6pt. Socket 10 mm

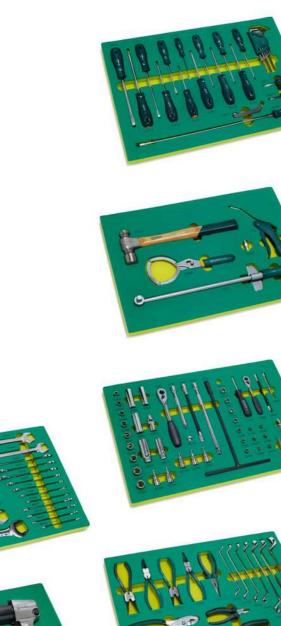









Please refer to the warranty terms of the individual product

Fits ST95107SC 7 Drawer Roller Cabinet 31"

| Article Code | Length (mm) | Width (mm) | Hight (mm) | |
|--------------|-------------|------------|------------|---|
| ST95207S | 570.0 | 375.0 | 30.0 | 1 |



General Tool Sets

9 Pc. VDE Insulated Screwdriver and Pliers Set

| Article Code | Content | | Article Code | Content | (|
|--------------|---|---|--------------|--|----------|
| ST09262U | 1 - VDE Insulated Linesman Pliers 8" 1 - VDE Insulated Diagonal Pliers 6" 1 - VDE Insulated Long Nose Pliers 6" 6 - G-Series VDE Insulated Screwdrivers Slotted 2.5 x 75 mm, 4 x 100 mm, 5.5 x 125 mm Philips # 0 x 60 mm, # 1 x 80 mm, # 2 x 100 mm | 4 | ST06002 | Adjustable wrench 8" T series double-ended screwdriver # 2 & 6 mm x 100 mm Long nose pliers 6" Tape measure 3 m x 16 mm Snap-off knife | 12 |



7 Pc. Basic Tool Set

| Article Code | Content | | Article Code | Content | K |
|--------------|---|---|--------------|--|---|
| ST06001SJ | Linesman pliers 7" Adjustable Wrench 8" T series double-ended screwdriver # 2 & 6 mm x 10 mm Circuit Tester Tape Measure 2 m x 13 mm Utility Knife Claw Hammer with steel handle 8 oz / 227 g | 8 | ST06004 | Adjustable wrench 8" T series double-ended screwdriver # 2 & 6 mm x 10 mm Linesman pliers 6" Long nose pliers 6" Tape measure 3 m x 16 mm Claw hammer with steel handle 8 oz / 227 g Circuit tester Aluminum alloy flashlight Snap-off knife | 8 |



Please refer to the warranty terms of the individual product




a constant

GENERAL TOOL SETS


02

5 Pc. Basic Tool Set





9 Pc. Basic Tool Set





O2 General Tool Sets

11 Pc. Driver's Tool Set

| Article Code | Content | V |
|--------------|---|----------|
| ST06011 | 1/2" Dr. L Type Extendable Socket Wrench 1/2" Dr. Double-end Sockets 17x19, 21x23 mm Linesman Pliers 7" Long Nose Pliers 6" Adjustable Wrench 8" Acetate Screwdriver Slotted 6x100 mm Acetate Screwdriver Phillips #2x100 mm Tape Measure 3 mx16 mm Utility Knife 18x100 mm LED Flashlight | 4 |



19 Pc. Basic Tool Set

| Article Code | Content | |
|--------------|--|---|
| ST04110SC | Linesman pliers 6" Long hex keys 1.5, 2, 2.5, 3, 4, 5, 6, 8 mm Claw hammer with wooden handle 8 oz / 227 g Mini saw 6" Slotted screwdriver 3 x 75 mm; 6 x 100 mm Phillips screwdriver # 0 x 75 mm; # 2 x 100 mm Tape measure 3 m x 16 mm Circuit tester Snap-off knife Adjustable wrench 8" | 6 |

Please refer to the warranty terms of the individual product



35 Pc. 1/4" and 3/8" Drive E-Torx Socket and Wrench Set

| Article Code | Content | S |
|--------------|--|----------|
| ST09010SJ | 7 - 1/4" Shank Tamper-Proof Torx® Bits T10, T15, T20, T25, T27, T30, T40 12 - 3/8" Dr. E-Torx® Sockets E4, E5, E6, E7, E8, E10, E11, E12, E14, E16, E18, E20 11 - 3/8" Dr. Torx® Bit Sockets T10, T15, T20, T25, T27, T30, T40, T45, T50, T55, T60 4 - E-Torx® Wrenches E6xE8, E10xE12, E14xE18, E20xE24 1 - 1/4" Shank x 3/8" Dr. Bit Adapter | 12 |

21 Pc. 1/2" Drive 6 Point and 12 Point Metric/SAE Socket Wrench Set

| Article Code | Content | |
|--------------|---|---|
| ST09077SJ | 1 - Quick-Release Ratchet 8 - Metric 6pt. Sockets 10, 11, 12, 13, 14, 15, 17, 19 mm 4 - SAE 12pt. Sockets 3/8", 7/16", 1/2", 9/16" 1 - Spark Plug Socket 16 mm 5 - Metric Combination Wrenches 10, 11, 12, 13, 14 mm 2 - Wobble Extensions 5", 10" | 4 |

25 Pc. 1/2" Drive 6 Point and 12 Point Metric Socket and Wrench Set

| Article Code | Content | |
|--------------|--|---|
| ST09506SJ | 1 - 1/2" Quick-Release Ratchet 12 - 1/2" 12pt. Metric Sockets 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 22, 24 mm 3 - 1/2" 6pt. Metric Deep Sockets 13, 17, 19 mm 1 - 1/2" Spark Plug Socket 16 mm 5 - Metric Combination Wrenches 10, 11, 12, 13, 14 mm 3 - Accessories 1/2" Wobble Extension 10" 1/2" Universal Joint 3/8"F x 1/2"M 3-Way Adapter | 4 |

25 Pc. Basic Tool Set

| Article Code | Content | | |
|--------------|--|---|---|
| ST06008SJ | 2 - Acetate Screwdrivers Slotted 5x100 mm Phillips #1x100 mm 1 - Circuit Tester 1 - Adjustable Wrench 8" 1 - Long Nose Pliers 6" 1 - Linesman Pliers 6" 1 - Insulation Tape 1 - Fine Point Tweezer 1 - Tape Measure 3 mx16 mm 1 - Utility Knife 1 - Scissors 1 - Aluminum Flashlight | Mini Hacksaw Mini Hacksaw Blades Hickory Claw Hammer 80z / 227 g 8 pc. Metric Hex Key Fold-Up Set 1.5, 2, 2.5, 3, 4, 5, 6, 8 mm Plastic Box | 4 |

Please refer to the warranty terms of the individual product









26 Pc. 1/2" Drive 6 Point Metric Socket Tool Set

| Article Code | Content | |
|--------------|--|---|
| ST09502SJ | Quick-Release Ratchet 6pt. Metric Sockets 10, 12, 14, 16, 17, 19, 21, 22, 24 mm Combination Wrenches 8, 10, 12, 14, 16, 17, 19 mm Acetate Screwdrivers, Slotted 6x100 mm, 6x150 mm Phillips #2x100 mm, #2x150 mm Accessories Wobble Extension Bar 5" Flex Handle 15" Long Nose Pliers 6" Diagonal Pliers 6" Linesman Pliers 7" | 4 |



33 Pc. 1/2" Drive 6 Point Metric Socket Wrench Set

| Article Code | Content | |
|--------------|--|---|
| ST09099 | 1 - Quick-Release Ratchet 21 - 6pt. Metric Sockets 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 27, 30, 32, 34 mm 5 - 12pt. Metric Sockets, 10, 12, 14, 17, 19 mm 2 - Metric Quad Box Wrenches 8x10+12x13 mm, 16x17+18x19 mm 4 - Accessories, Wobble Extension Bars 5", 10" 3/8"F x 1/2"M 3-Way Adapter Universal Joint | 4 |



42 Pc. 3/8" Drive 6 Point Metric 120XP Socket Wrench Set

| Article Code | Content | (|
|--------------|--|----------|
| ST09054 | 3/8" Drive 120xp Ratchet 3/8" Universal Joint 3/8" Wobble Extensions 3", 6", 10" 3/8" Metric 6pt. Sockets 7, 8, 9, 10, 11, 12, 13, 14, 15,16, 17, 18, 19, 21, 22, 24 mm 3/8" Metric 6pt. Deep Sockets 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22 mm 120xp Metric Ratcheting Wrenches 8, 10, 12, 13, 14, 15, 18 mm | 3 |



32 Pc. 3/8" Drive 6 Point SAE 120XP Socket and Wrench Set

| Article Code | Content | |
|--------------|---|---|
| ST09044 | 3/8" 120xp Ratchet 3/8" Universal Joint 3/8" Wobble Extensions 3", 6", 10" 3/8" SAE 6pt. Sockets 1/4", 5/16", 3/8", 7/16", 1/2", 9/16", 5/8", 11/16", 3/4", 13/16", 7/8" 3/8" SAE 6pt. Deep Sockets 3/8", 7/16", 1/2", 9/16", 5/8", 11/16", 3/4", 13/16", 7/8" 120xp SAE Ratcheting Wrenches 5/16", 3/8", 7/16", 1/2", 9/16", 5/8", 3/4" | 3 |

52 Pc. 1/4" Drive 6 Point Metric Master Tool Set

| Article Code | Content | | V |
|--------------|--|--|----------|
| ST09505SJ | Quick Release Ratchet 6pt. Metric Sockets 3.5, 4, 4.5, 5, 55, 6, 7, 8, 9, 10, 11, 12, 13, 14 mm 6pt. Metric Deep Sockets 8,9,10,11,12, 13 mm 5/16" Shank 30L Bits Slotted 4, 5.5, 6.5 mm Phillips #1, #2, #3, T10, T15, T20, T25, T30, T40 Hex 3, 4, 5, 6, 7, 8 mm Mini Long Nose Plier 5" | Mini Diagonal Plier 5" Curved Jaw Locking Plier 5" Adjustable Wrench 6" Screwdrivers Slotted 3.2 x 150 mm Phillips # 0 x 75 mm Torx T8 x 75 mm Accessories Spinner Handle Sliding T-Bar Wobble Extension Bars 2", 4" Universal Joint Bit Coupler | 4 |

58 Pc. 3/8" Drive 6 Point Metric Mechanic's Tool Set

| Article Code | Content | | |
|--------------|---|--|---|
| ST09516SJ | 3/8" Dr. Quick Release Ratchet 3/8" Dr. 6pt. Metric Sockets 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19 mm 9 Pc. Metric Ball Point Hex Key Set 1.5, 2, 2.5, 3, 4, 5, 6, 8, 10 mm Combination Wrenches 8, 10, 11, 12, 13, 14, 15, 16, 18, 19 mm Metric Combination Ratcheting Wrench 17 mm Adjustable Wrench 8" Acetat Screwdrivers Slotted 6x38 mm, 32x75 mm, 5x100 mm Phillips #2x38 mm, #0x75 mm, #1x100 mm, #2x150 mm | Linesman pliers 8" Long Nose Pliers 6" 5 pc. Snap Ring Pliers Set Tape Measure 3 m x 16 mm 23 pc. Feeler Gauge Set 0.02 mm - 1 mm Straight Steel Ruler 150 mm Hickory Ball Pein Hammer 16 oz / 454 g Magnetic Pickup Tool Snap-off Knife Aluminum Alloy Flashlight (with 2 AA batteries) Universal Joint | 2 |







GENERAL TOOL SETS

76 Pc. 1/4" and 1/2" Drive 6 Point Metric Socket Wrench Set

| Article Code | Content | |
|--------------|--|---|
| ST09519SJ | 2 - 1/4", 1/2" Dr. Quick-Release Ratchets 7 - 1/4" Dr. 6pt. Metric Sockets 8, 9, 10, 11, 12, 13, 14 mm 18 - 1/4" Dr. Bit Sockets Slotted 4, 55, 6.5 mm Phillips #1, #2 Pozidriv #1, #2 Torx® T8, T10, T15,T20, T25, T30, T40 Hex 3, 4, 5, 6 mm 12 - 1/2" Dr. 6pt. Metric Sockets 8, 10, 12, 13, 14, 17, 19, 22, 24, 27, 30, 32 mm 9 - Combination Wrenches 8, 10, 11, 12, 13, 14, 17, 19, 22, mm 15 - 5/16" Shank 30L Bits Slotted 8, 10, 12 mm Phillips #3, #4 Pozidriv #3, #4 Torx® T40, T45, T50, T55 Hex 8, 10, 12, 14 mm 2 - 1/2" Dr. Spark Plug Sockets 16, 21 mm 11 - Accessories 1/4" Dr. T-Handle 1/4" Dr. Flex Extension 1/4" Dr. Wobble Extension Bars 2", 4" 1/2" Dr. Wobble Extension Bars 5", 10" 1/4", 1/2" Dr. Universal Joints 1/4" Dr. Spinner Handle 1/2" Dr. T-Handle 1/2" Dr. T-Handle 1/4" Dr. Spinner Handle 1/2" Dr. T-Handle 1/2" Dr. T-Handle 1/2" Dr. T-Handle 1/4" Dr. Spinner Handle 1/2" Dr. T-Handle 1/2" Dr. T-Handle 1/2" Dr. T-Handle 1/4" Dr. Spinner Handle 1/2" Dr. T-Handle 1/4" Dr. Spinner Handle 1/2" Dr. T-Handle 1/4" Dr. Spinner Handle 1/2" Dr. T-Handle 1/2" Dr. T-Handle 1/2" Dr. T-Handle 1/2" Dr. T-Handle | 3 |

124 Pc. 1/4", 3/8" & 1/2" Drive 6 Point Metric/SAE 6 Point Socket Wrench Set

| Article Code | Content | |
|--------------|---|---|
| ST09014SJ | 3 - 1/4", 3/8", 1/2" Dr. Quick-Release Ratchets 10 - 1/4" Dr. 6pt. Metric Sockets 4, 5, 6, 7, 8, 9, 10, 11, 12, 13 mm 4 - 1/4" Dr. 6pt. Metric Deep Sockets 8, 9, 10, 12 mm 1 - 3/8" Dr. 6pt. Metric Deep Socket 8, 9, 10, 12 mm 1 - 3/8" Dr. 6pt. Metric Deep Socket 3, 14, 15, 16, 17, 18, 19 mm 3/8" Dr. 6pt. Metric Deep Socket 13, 14, 15, 17 mm 3/8" Dr. Forx® Sockets E8, E10, E11, E12, E14, E16, E18, E20 17 - 3/8" Dr. Bit Sockets Soluted 5.5, 6.5 mm Phillips #1, #2 17 - 3/8" Dr. Bit Sockets Soluted 5.5, 6.5 mm Phillips #1, #2 18 - Accessories 1/4" Dr. Wobble Extension Bar 2" 3/8" T x 1/4"M, 3/8"F x 1/2" Dr. Universal Joints 3/8" F x 1/4"M, 3/8"F x 1/2" Dr. Universal Joints 3/8" F x 1/4"M, 3/8"F x 1/2" Adapters 1/4" Shank x 1/4" Dr. Bit Adapter 1/4" Shank X 1/4" Dr. Socket S 1.5, 2, 2, 5, 3, 4, 5, 6, 8, 10 mm Circuit Tester Universal 3-Way Oil Filter Wrench 63-102 mm | 2 |



128 Pc. 1/4", 3/8" and 1/2" Drive 6 Point Metric Socket Wrench Set

| Article Code | Content | |
|--------------|--|---|
| STO9014A | 1 - 3/8" Dr. Quick-Release Ratchet 1 - 1/4" Dr. Quick-Release Ratchet 1 - 1/4" Dr. 6pt. Metric Sockets 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14 mm 5 - 1/4" Dr. 6pt. Metric Deep Sockets 8, 9, 10, 11, 12 mm 11 - 3/8" Dr. 6pt. Metric Deep Sockets 8, 9, 10, 11, 12 mm 11 - 3/8" Dr. 6pt. Metric Deep Sockets 13, 14, 15, 16, 17, 18, 19 mm 7 - 3/8" Dr. 6pt. Metric Deep Sockets 13, 14, 15, 16, 17, 18, 19 mm 8 - 3/8" Dr. E-Torx® Sockets E8, E10, E11, E12, E14, E16, E18, E20 17 - 3/8" Dr. Bit Sockets Slotted 5.5, 6.5 mm Phillips #1, #2 Torx® T20, T30, T40 Tamper-Proof Torx® T45, T50, T55 T60 Hex 3, 4, 5, 6 mm Pozidriv #1, #2, #3 2 - 3/8" Dr. Spark Plug Sockets 16, 21 mm 7 - 1/2" Dr. Spt Netric Sockets 20, 21, 22, 24, 27, 30, 32 mm 1 - 1/2" Dr. Triple Square Bit Socket M10 12 - Metric Combination Wrenches 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19 mm 1 - Metric Combination Wrenches 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19 mm 1 - Metric X-BEAM® Combination Wrench 13 mm 2 - Acetate Go-Through Screwdrivers Slotted 6x100 mm Phillips #2x100 mm 41 - Accessories 1/4" Dr. Spinner Handle 1/4" Dr. Wobble Extension Bars 3", 6" 1/2" Dr. Wobble Extension Bars 3", 6" 1/2" Dr. Wobble Extension Bars 3", 6" 1/2" Shank x 1/4" Dr. Bit Adapter 1/4" Shank Bits Slotted 4, 5, 6.5 mm Phillips #1, #3 Tamper-Proof Torx® T10, T15, T20, T25, T27, T30, T40 Hex 3, 4, 5, 6 mm Pozidriv #1, #2 9 Pc. Metric Extra Long Hex Key Set 1.5, 2, 2.5, 3, 4, 5, 6, 8, 10 mm Circuit Tester Universal 3-Way Oil Filter Wrench 63-102 mm | 2 |



GENERAL TOOL SETS

150 Pc. 1/4", 3/8" and 1/2" Drive 6 and 12 Point Metric/SAE Socket Wrench Set

| Article Code | Content | | - SET |
|--------------------------|--|---|---------|
| Article Code ST09510L | 3 - 1/4", 3/8", 1/2" Dr. Quick-Release Ratchets 10 - 1/4" Dr. 6pt. Metric Sockets 4, 5, 6, 7, 8, 9, 10, 11, 12, 13 mm 10 - 1/4" Dr. 6pt. SAE Sockets 5/32, 3/16, 7/32, 1/4, 9/32, 5/16, 11/32, 3/8, 7/16, 1/2" 6 - 1/4" Dr. 6pt. Metric Deep Sockets 4, 5, 6, 7, 8, 9 mm 11 - 3/8" Dr. 6pt. Metric Sockets 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19 mm 9 - 3/8" Dr. 6pt. Metric Deep Sockets 3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8" 6 - 3/8" Dr. 6pt. Metric Deep Sockets 10, 11, 12, 13, 14, 15 mm 2 - 3/8" Dr. 6pt. Metric Deep Sockets 10, 11, 12, 13, 14, 15 mm 2 - 3/8" Dr. 6pt. Metric Deep Sockets 10, 11, 12, 13, 14, 15 mm 2 - 3/8" Dr. 6pt. Metric Deep Sockets 16, 21 mm 2 - 3/8" Dr. 6pt. Metric Sockets 16, 21 mm 2 - 3/8" Dr. 6pt. Metric Deep Sockets 16, 21 mm 2 - 3/8" Dr. 6pt. Metric Sockets 16, 21 mm 2 - 3/8" Dr. 6pt. Metric Sockets 16, 21 mm 2 - 3/8" Dr. 6pt. 4, 55, 6.5 mm Phillips #1, #2, #3 Pozidriv #1, #2, #3 Posidriv #1, #2, #3 Posid | 1 | OL SETS |
| | 27 - Accessories | | |



150 PC. 1/4", 3/8" & 1/2" ST09510L DRIVE 6 & 12 POINT METRIC/ **SAE SOCKET WRENCH SET**





SATA[®] LIFETIME WARRANTY

lever









Quick release ratchet

Flush reversing

1/2"

Sockets feature Large easy ID off-corner size markings loading Single hex (6 pt.) fastener end Standard & deep sockets **METRIC** 1/4"



150 Pc. 1/4", 3/8" and 1/2" Drive 6 and 12 Point Metric/SAE Master Tool Set

| Article Code | Content | |
|--------------|---|---|
| ST09510SJ | 3 - 1/4", 3/8", 1/2" Dr. Quick-Release Ratchets 10 - 1/4" Dr. 6pt. Metric Sockets 4, 5, 6, 7, 8, 9, 10, 11, 12, 13 mm 10 - 1/4" Dr. 6pt. SAE Sockets 5/32, 3/16, 7/32, 1/4, 9/32, 5/16, 11/32, 3/8, 7/16, 1/2" 6 - 1/4" Dr. 6pt. Metric Deep Sockets 4, 5, 6, 7, 8, 9 mm 11 - 3/8" Dr. 6pt. Metric Sockets 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19 mm 9 - 3/8" Dr. 6pt. SAE Sockets 3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8" 6 - 3/8" Dr. 6pt. Metric Deep Sockets 10, 11, 12, 13, 14, 15 mm 2 - 3/8" Dr. 6pt. Metric Deep Sockets 10, 11, 12, 13, 14, 15 mm 2 - 3/8" Dr. Bit Sockets Slotted 4, 5.5, 6.5 mm Phillips #1, #2, #3; Pozidriv #1, #2, #3 Torx® T20, T30, T40 Tamper-Proof Torx® T45, T50, T55, T60 Hex 3, 4, 5, 6, 8, 10 mm 8 - 3/8" Dr. 6pt. E-Torx® Sockets E8, E10, E11, E12, E14, E16, E18, E20 8 - 1/2" Dr. 12pt. Metric Sockets 20, 21, 22, 24, 27, 30, 32, 34 mm 4 - 1/2" Dr. 12pt. Metric Deep Sockets 10, 12, 13, 14, 17, 19 mm 12 Metric Combination Wrenches 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19 mm 3 - Metric Double Box Ratcheting Wrenches 8x10, 12X13, 17X19 mm 3 - Go-Through Screwdrivers Slotted 6x150 mm, 8x200 mm Phillips #2x150 mm 27 - Accessories 1/4" Dr. Bit Adapter 1/4" Dr. Bit Adapter 1/4" Dr. Spinner Handle 1/4" Dr. Wobble Extension Bar 4" 1/4" Dr. Wobble Extension Bar 5" 1/2" Dr. Locking Extension Bar 5" 1/2" Dr. Wobble Extension Bar 5" 1/2" Dr. Wobble Extension Bar 5" 1/2" Dr. Locking Extension Bar 5" 1/2" Dr. Locking Extension Bar 10" 1/4", 3/8', 1/2" Dr. Universal Joints 1/4" Shank Tamper-Proof Torx® Bits T10, | 1 |
| | | |





GENERAL TOOL SETS

02

70 Pc. Metric Cantilever Tool Box and Tray Set

| Article Code | Content | |
|---|---|---|
| | 1-5" Cantilever Tool Box | 1 |
| ST95104A70-6 | 1 - 1/2" Dr. Quick-Release Ratchet 17 - 1/2" Dr. Metric Sockets* 8, 9, 10, 11, 12, 13, 14, 17, 19, 20, 21, 22, 23, 24, 27, 30, 32 mm | |
| 6 Point Metric Standard and | 3 - 1/2" Dr. Metric Deep Sockets* 17, 19, 21 mm 11 - Combination Wrenches 8, 9, 10, 11, 12, 13, 14, 17, 19, 21, 24 mm | |
| Deep Sockets | 4 - Acetate Screwdrivers Slotted 5x75 mm, 6x150 mm Phillips #1x75 mm, #2x150 mm | |
| | 1 - Adjustable Wrench 12" 1 - Long Nose Pliers 6" | |
| | 1 - Diagonal Pliers 6" | |
| ST95104A70 | 1 - Linesman Pliers 7" | |
| 12 Point Metric Standard and Deep Sockets | Hickory Ball Pein Hammer 24 oz Accessories 1/2" Dr. Wobble Extension Bars 5", 10" 1/2" Dr. Universal Joint 1/2" Dr. Offset Handle 260 mm 8 Pc. Metric Foldup Hex Key Set | |
| | 16 Pc. Feeler Gauge Set | |



150 PC. 1/4", 3/8" & 1/2" ST09510SJ DRIVE 6 & 12 POINT METRIC/ SAE MASTER TOOL SET



Quick release ratchet



lever







Sockets feature Large easy ID off-corner size markings loading

Standard & deep sockets



Flush reversing Single hex (6 pt.) fastener end

METRIC 1/4"

1/2"







Ratchets, Sockets & Drive Tools

3 PC. 120XP 1/4", 3/8" AND 1/2" RATCHET SET







Designed with 120 positions

Two double stacked | 60-tooth pawls i


infiltration







ST13975



Teardrop, lowprofile head



Flush reversing lever



chrome finish



03 Ratchets, Sockets & Drive Tools

3 Pc. 120XP 1/4", 3/8" and 1/2" Ratchet Set

| Article Code | Content | | |
|--------------|--|----|--|
| ST13975 | 1 - 120XP Dr. Full Polish Ratchet 1/4" 1 - 120XP Dr. Full Polish Ratchet 3/8" 1 - 120XP Dr. Full Polish Ratchet 1/2" | 12 | |

13 Pc. 1/4" Drive 6 Point Metric Socket Set

| | Article Code | Content | |
|----|--------------|---|---|
| 12 | ST09521L | 1 - Quick-Release Round Head Ratchet 11 - 6pt. Metric Sockets 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14 mm 1 - Wobble Extension Bar 2" | 6 |





20 Pc. 1/4" Drive 6 Point Metric Socket Set

| Article Code | Content | | |
|--------------|--|----|--|
| ST09522 | Quick-Release Round Head Ratchet 6pt. Metric Sockets 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14 mm 6pt. Metric Deep Sockets 8, 10, 12, 13 mm Extension Bar 2" Spinner Handle | 12 | |

36 Pc. 1/4" Drive 6 Point Metric Socket Set

| Article Code | Content | | Y |
|--------------|---|---|----|
| ST09001SJ | Quick-Release Ratchet 6pt. Metric Sockets 3.5, 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14 mm 6pt. Metric Deep Sockets 8, 10, 11, 12, 13 mm 9 - Shank 25L Bits Slotted 4, 5, 6 mm Phillips #1, #3 Hex 3, 4, 5, 6 mm | 7 - Accessories Spinner Handle Wobble Extension Bars 2", 4" Flex Extension 6" Bit Adapter T-Handle Universal Joint | 12 |





52 Pc. 1/4" Drive 6 Point Metric Socket Set

| Article Code | Content | |
|--------------|---|----|
| ST09002SJ | 1 - Quick-Release Ratchet 14 - 6pt. Metric Sockets 3.5, 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14 mm 4 - 6pt. Metric Deep Sockets 8, 10, 12, 13 mm 18 - Bit Sockets Slotted 4, 5.5, 6.5 mm Phillips #1, #2 Pozidriv #1, #2 Torx® T10, T15, T20, T25, T30, T40 Hex 3, 4, 5, 6, 8 mm 9 - Shank 25L Bits Slotted 4, 5, 6.5 mm Phillips #1, #3 Hex 3, 4, 5, 6 mm 6 - Accessories Spinner Handle T-Handle Universal Joint Wobble Extension Bars 2", 4" Bit Adapter | 12 |

21 Pc. 1/4" Drive 6 Point SAE Socket Set

| Article Code | Content | | Article Code | Content | |
|--------------|--|----|--------------|---|---|
| ST09521-02 | 1 - Quick-Release Ratchet 11 - 6pt. Metric Sockets 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14 mm 6 - Shank 25L Bits Slotted 4, 5, 6 mm Phillips #1, #2, #3 3 - Accessories Extension 2" Spinner Handle 6" Bit Adapter | 12 | ST09098SJ | 1 - Quick-Release Ratchet 10 - 6pt. SAESockets 5/32, 3/16, 7/32, 1/4, 9/32, 5/16, 11/32, 3/8, 7/16, 1/2" 10 - 6pt. SAEDeep Sockets 5/32, 3/16, 7/32, 1/4, 9/32, 5/16, 11/32, 3/8, 7/16, 1/2" 4 - Accessories Flex Handle 10" Wobble Extension 2", 6" Universal Joint | 6 |





25 Pc. 1/4" Drive 6 Point SAE Socket Set



65 Pc. 1/4" and 3/8" Drive 6 Point Metric/SAE Socket Set

| Article Code | Content | |
|--------------|--|---|
| ST09011SJ | 3/8" Dr. Quick-Release Ratchet 1/4" Dr. 6pt. Metric Sockets 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13 mm 1/4" Dr. 6pt. SAE Sockets 5/32, 3/16, 7/32, 1/4, 9/32, 5/16, 11/32, 3/8, 7/16, 1/2" 1/4" Shank 25L Bits Slotted 4, 5.5, 6.5 mm Phillips #1, #2, #3 Torx® T10, T15, T20, T25, T30, T40 Hex 3, 4, 5, 6, 7, 8 mm - 3/8" Dr. 6pt. Metric Sockets 10, 11, 12, 13, 14, 15, 16, 17, 18, 19 mm - 3/8" Dr. 6pt. SAE Sockets 3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16" - 3/8" Dr. Spark Plug Socket 16 mm - Accessories 3/8" Dr. Wobble Extension Bar 3" 3/8" Dr. Universal Joint 1/4" Shank x 1/4" Dr. Bit Adapter 3/8"F x 1/4"M Adapter 1/4" Dr. Spinner Handle | 3 |



88 Pc. 1/4" and 1/2" Drive 6 Point Metric Socket Set

| Article Code | Content | |
|--------------|---|---|
| ST09013SJ | 2 - 1/4", 1/2" Dr. Quick-Release Ratchets 13 - 1/4" Dr. 6pt. Metric Sockets 3.5, 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13 mm 6 - 1/4" Dr. 6pt. Metric Deep Sockets 8, 9, 10, 11, 12, 13 mm 17 - 1/4" Dr. Bit Sockets Slotted 4, 5.5, 6.5 mm Phillips #1, #2 Pozidriv #1, #2 Torx® T8, T10, T15, T20, T25, T31 Hex 3, 4, 5, 6 mm 2 - 1/2" Dr. Spark Plug Sockets 16, 21 mm 17 - 1/2" Dr. 6pt. Metric Deep Sockets 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 24, 27, 30, 32 mm 6 - 1/2" Dr. 6pt. Metric Deep Sockets 14, 15, 16, 17, 18, 19 mm 15 - 5/16" Shank 30L Bits Slotted 8, 10, 12 mm Phillips #3, #4 Pozidriv #3, #4 Torx® T40, T45, T50, T55 Hex 8, 10, 12, 14 mm 10 - Accessories 1/4" Dr. T-Handle 1/4" Dr. Wobble Extension Bars 2", 4" 1/2" Dr. Wobble Extension Bars 5", 10" 1/4", 1/2" Dr. Universal Joints 3/8"F x 1/2"M 3-Way Adapter 1/4" Dr. Spinner Handle 5/16" Shank x 1/2" Dr. Bit Adapter | 3 |



18 Pc. 1/4" and 1/2" Drive Bit Socket Sets

| cription | | Article Code | Description |
|---|---|--------------|--|
| Pc. 1/4" and 1/2" Bit Socket Set /4" Dr. Bit Socket Slotted 4, 5.5, 6.5 Phillips #1, #2, # /2" Dr. 50L Triple Square Bit Socket 45, M6, M8, M10, 412, M14 /2" Dr. 100L Trip Square Bit Socket 45, M6, M8, M10, 412, M14 | ets mm 43 le ets , ole ets | ST09052SJ | 18 - Pc. 1/4" and 1/2" Dr. Torx [®] Bit Socket Set 6 - 1/4" Dr. Torx [®] Bit Sockets T10, T15, T20, T25, T30, T40 6 - 1/2" Dr. 50L Torx [®] Bit Sockets T30, T40, T45, T50, T55, T60 6 - 1/2" Dr. 100L Torx [®] Bit Sockets T30, T40, T45, T50, T55, T60 6 - 1/2" Dr. 100L Torx [®] Bit Sockets T30, T40, T45, T50, T55, T60 |



3 Pc. 1/4", 3/8" and 1/2" Metric Socket Tray Set

- Space saving design preferred by, and designed for, professionals
- Helps to keep your workspace organized
- Large markings offer easy size identification
- Clearly marked socket sizes on pins for instant size identification
- Sturdy, break resistant pins have professional strength
- Quick to read size markers on the top of each pin
- Each tray can hold both standard and deep sockets



| Article Code | |
|--------------|---|
| ST95401 | 9 |

| Article Code | Description | |
|--------------|--|---|
| ST09053SJ | 18 - Pc. 1/4" and 1/2" Dr. Hex Bit Socket Set 6 - 1/4" Dr. Hex Bit Sockets 3, 4, 5, 6, 7, 8 mm 6 - 1/2" Dr. 50L Hex Bit Sockets 5, 6, 7, 8, 10, 12 mm 6 - 1/2" Dr. 100L Hex Bit Sockets 5, 6, 7, 8, 10, 12 mm | 5 |



3 Pc. 1/4", 3/8" and 1/2" SAE Socket Tray Set

- Space saving design preferred by, and designed for, professionals
- Helps to keep your workspace organized
- Large markings offer easy size identification
- Clearly marked socket sizes on pins for instant size identification
- Sturdy, break resistant pins have professional strength
- Quick to read size markers on the top of each pin
- Each tray can hold both standard and deep sockets





1/4" Drive 6 Point Socket

- Single hex (6 pt.) fastener end design
- Off-corner loading design reduces fastener rounding
- Large markings offer easy size identification
- Double line (SAE) & knurled line (MM) to easily identify standard and metric sockets
- Manufactured to industrial specifications assuring a thin wall design with precise nut end dimensions
- Heat treated for long lasting durability
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.110



These sockets accessories should never be used on power drivers, pneumatic impact wrench and/or extenders.

| Article Code | Fastener Size | Overall Length (mm) (Dimension C) | Drive End (mm) (Dimension A) | Wrench End (mm) (Dimension B) | 4 | |
|-----------------------|---------------|--------------------------------------|---------------------------------|----------------------------------|---|--|
| ST11301SC | 3.5 mm | 24.5 | 11.8 | 6.1 | 6 | |
| ST11302SC 4.0 mm 24.5 | | 11.8 | 7.0 | 6 | | |
| ST11303SC 4.5 mm 24.5 | | 11.8 | 7.3 | 6 | | |
| ST11304SC | 5.0 mm | 24.5 | 11.8 | 8.0 | 6 | |
| ST11305SC | 5.5 mm | 24.5 | 11.8 | 8.6 | 6 | |
| ST11306SC | 6.0 mm | 24.5 | 11.8 | 9.2 | 6 | |
| ST11307SC | 7.0 mm | 24.5 | 11.8 | 10.7 | 6 | |
| ST11308SC | 8.0 mm | 24.5 | 11.8 | 11.8 | 6 | |
| ST11309SC | 9.0 mm | 24.5 | 13.0 | 13.0 | 6 | |
| ST11310SC | 10.0 mm | 24.5 | 14.2 | 14.2 | 6 | |
| ST11311SC | 11.0 mm | 24.5 | 15.8 | 15.8 | 6 | |
| ST11312SC | 12.0 mm | 24.5 | 16.8 | 16.8 | 6 | |
| ST11313SC | 13.0 mm | 24.5 | 17.5 | 17.5 | 6 | |
| ST11314SC | 14.0 mm | 24.5 | 19.5 | 19.5 | 6 | |
| ST11101SC | 5/32" | 24.5 | 11.8 | 7.0 | 6 | |
| ST11102SC | 3/16" | 24.5 | 11.8 | 7.8 | 6 | |
| ST11103SC | 7/32" | 24.5 | 11.8 | 8.5 | 6 | |
| ST11104SC | 1/4" | 24.5 | 11.8 | 9.5 | 6 | |
| ST11105SC | 9/32″ | 24.5 | 11.8 | 10.7 | 6 | |
| ST11106SC | 5/16" | 24.5 | 11.8 | 11.8 | 6 | |
| ST11107SC | 11/32" | 24.5 | 12.5 | 12.5 | 6 | |
| ST11108SC | 3/8" | 24.5 | 13.8 | 13.8 | 6 | |
| ST11109SC | 17/16″ | 24.5 | 15.7 | 15.7 | 6 | |
| ST11110SC | 1/2" | 24.5 | 17.3 | 17.3 | 6 | |

1/4" Drive 6 Point Deep Socket

- Single hex (6 pt.) fastener end design
- Off-corner loading design reduces fastener rounding
- Deep socket to reach more fasteners
- Large markings offer easy size identification
- Double line (SAE) & knurled line (MM) to easily identify standard and metric sockets
- Manufactured to industrial specifications assuring a thin wall design with precise nut end dimensions
- Heat treated for long lasting durability
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.110

| <u>/</u> | | These | sockets | accessories | should | never | be | used | on | power | drivers, | pn |
|----------|--|-------|---------|-------------|--------|-------|----|------|----|-------|----------|----|
|----------|--|-------|---------|-------------|--------|-------|----|------|----|-------|----------|----|

| Article Code | Fastener Size | Overall Length (mm) (Dimension C) | Drive End (mm) (Dimension A) | Wrench End (mm) (Dimension B) | \$ |
|------------------|---------------|--------------------------------------|---------------------------------|----------------------------------|-----------|
| ST11401SC 4.0 mm | | 49.0 | 11.9 | 6.7 | 6 |
| ST11402SC 5.0 mm | | 49.0 | 11.9 | 8.0 | 6 |
| ST11403SC | 6.0 mm | 49.0 | 11.9 | 9.2 | 6 |
| ST11404SC | 7.0 mm | 49.0 | 11.9 | 10.8 | 6 |
| ST11405SC | 8.0 mm | 49.0 | 11.9 | 11.9 | 6 |
| ST11406SC | 9.0 mm | 49.0 | 13.1 | 13.1 | 6 |
| ST11407SC | 10.0 mm | 49.0 | 14.6 | 14.6 | 6 |
| ST11408SC | 11.0 mm | 49.0 | 15.9 | 15.9 | 6 |
| ST11409SC | 12.0 mm | 49.0 | 16.9 | 16.9 | 6 |
| ST11410SC | 13.0 mm | 49.0 | 17.9 | 17.9 | 6 |
| SC11201 | 3/16″ | 49.0 | 11.9 | 7.9 | 6 |
| SC11202 | 7/32" | 49.0 | 11.9 | 8.9 | 6 |
| SC11203 | 1/4" | 49.0 | 11.9 | 9.9 | 6 |
| SC11204 | 9/32" | 49.0 | 11.9 | 11.0 | 6 |
| SC11205 | 5/16″ | 49.0 | 11.9 | 11.9 | 6 |
| SC11206 | 11/32" | 49.0 | 13.1 | 13.1 | 6 |
| SC11207 | 3/8″ | 49.0 | 14.6 | 14.6 | 6 |
| SC11208 | 7/16″ | 49.0 | 15.9 | 15.9 | 6 |
| SC11209 | 1/2" | 49.0 | 17.6 | 17.6 | 6 |





neumatic impact wrench and/or extenders.

1/4" Drive Quick-Release Round Head Ratchet

- Quick release design allows rapid socket removal
- 60-tooth design requires as little as 6° of swing arc to move a fastener
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.110



| Article Code | Length (mm) | |
|--------------|-------------|---|
| ST11901SC | 142.0 | 4 |

1/4" Drive Quick-Release **Teardrop Ratchet**

- Quick release design allows rapid socket removal
- 60-tooth design requires as little as 6° of swing arc to move a fastener
- Flush mounted reversing lever allows user to change direction with one hand without removing the ratchet
- Teardrop, low-profile head and flush-mounted on/off switch allow better access in tight spaces
- · Bright, full polish chrome finish easily wipes clean and resists corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.110



| Article Code | Length (mm) | |
|--------------|-------------|---|
| ST11905ST | 143.0 | 4 |



1/4" Drive Heavy Duty Offset Quick-Release Teardrop Ratchet

- Quick release design allows rapid socket removal
- 45-tooth design requires as little as 8° of swing arc to move a fastener
- Offset handle design provides knuckle clearance in tight access application
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.110

| Article Code | Length (mm) | |
|--------------|-------------|---|
| ST11970SC | 153.0 | 4 |

| Article Code | Le |
|--------------|----|
| ST11974 | |

| Article Code | Le |
|--------------|----|
| ST11909SC | |

| /4" Driv | ve 120XP Ratchet | | |
|---|--|---------------------|-----------|
| Designed w Designed w | vith 120 positions providing a 3° swing arc so you vith two double stacked 60-tooth pawls for exce atchet head design resists dirt infiltration for co | ptional strength | s |
| and efficier | nt execution | | |
| | thinner than conventional ratchet systems ow-profile head and flush-mounted on/off switc | h | Jan |
| | er access in tight spaces | | |
| direction w | nted reversing lever allows user to change vith one hand without removing the wrench polish chrome finish easily wipes clean | 23 | |
| and resists | | 9 | |
| strength ar | nd durability | - | |
| Meets or ex | xceeds ASME B107.110 | | |
| Article Code | L | ength (mm) | \$ |
| ST11974 | | 143.0 | 10 |
| Handle for I Flex head d One-Piece a Ball detent Bright, full resists cori | | | |
| Handle for f Flex head d One-Piece a Ball detent Bright, full resists corr Chrome var strength ar | more leverage to break stubborn fasteners free drive for multiple angles of use alloy steel construction for rugged performance helps to secure the socket to the drive tang polish chrome finish easily wipes clean and | | |
| Handle for Flex head d One-Piece a Ball detent Bright, full resists corr Chrome var strength ar Meets or ex | more leverage to break stubborn fasteners free drive for multiple angles of use alloy steel construction for rugged performance thelps to secure the socket to the drive tang polish chrome finish easily wipes clean and rosion nadium alloy steel (Cr-V) for exceptional nd durability xceeds ASME B107.110 | | |
| Handle for f Flex head d One-Piece a Ball detent Bright, full resists corr Chrome var strength ar Meets or ex | more leverage to break stubborn fasteners free drive for multiple angles of use alloy steel construction for rugged performance thelps to secure the socket to the drive tang polish chrome finish easily wipes clean and rosion nadium alloy steel (Cr-V) for exceptional nd durability xceeds ASME B107.110 | | |
| Handle for Flex head d One-Piece a Ball detent Bright, full resists corr Chrome var strength ar Meets or ex Article Code ST11909SC | more leverage to break stubborn fasteners free drive for multiple angles of use alloy steel construction for rugged performance thelps to secure the socket to the drive tang polish chrome finish easily wipes clean and rosion nadium alloy steel (Cr-V) for exceptional nd durability xceeds ASME B107.110 | ength (mm) 140.0 | • |
| Handle for f Flex head d One-Piece a Ball detent Bright, full resists corr Chrome var strength ar Meets or ex Article Code ST11909SC /4" Driv Sliding T-Ha Ball detent | more leverage to break stubborn fasteners free drive for multiple angles of use alloy steel construction for rugged performance thelps to secure the socket to the drive tang polish chrome finish easily wipes clean and rosion nadium alloy steel (Cr-V) for exceptional nd durability xceeds ASME B107.110 | ength (mm) 140.0 | |
| Handle for Flex head d One-Piece a Ball detent Bright, full resists corr Chrome var strength ar Meets or ex Article Code ST11909SC /4" Driv Sliding T-Ha Ball detent Allows for u | more leverage to break stubborn fasteners free drive for multiple angles of use alloy steel construction for rugged performance thelps to secure the socket to the drive tang polish chrome finish easily wipes clean and rosion nadium alloy steel (Cr-V) for exceptional nd durability xceeds ASME B107.110 | ength (mm) 140.0 | |
| Handle for i Flex head d One-Piece a Ball detent Bright, full resists corr Chrome var strength ar Meets or ex Article Code ST11909SC /4" Driv Sliding T-Ha Ball detent Allows for u Bright, full and resists Chrome var | more leverage to break stubborn fasteners free drive for multiple angles of use alloy steel construction for rugged performance thelps to secure the socket to the drive tang polish chrome finish easily wipes clean and rosion nadium alloy steel (Cr-V) for exceptional nd durability xceeds ASME B107.110 Ve T-Handle andle provides more leverage to break free stub for secure socket retention use with 1 hand on each side of drive tang polish chrome finish easily wipes clean s corrosion nadium alloy steel (Cr-V) for exceptional | ength (mm) 140.0 | |
| Handle for i Flex head d One-Piece a Ball detent Bright, full resists corr Chrome var strength ar Meets or ex Article Code ST11909SC /4" Driv Sliding T-Ha Ball detent Allows for u Bright, full and resists Chrome var strength ar | more leverage to break stubborn fasteners free drive for multiple angles of use alloy steel construction for rugged performance thelps to secure the socket to the drive tang polish chrome finish easily wipes clean and rosion nadium alloy steel (Cr-V) for exceptional nd durability xceeds ASME B107.110 | ength (mm) 140.0 | |
| Handle for i Flex head d One-Piece a Ball detent Bright, full resists corr Chrome var strength ar Meets or ex Article Code ST11909SC /4" Driv Sliding T-Ha Ball detent Allows for u Bright, full and resists Chrome var strength ar | more leverage to break stubborn fasteners free drive for multiple angles of use alloy steel construction for rugged performance thelps to secure the socket to the drive tang polish chrome finish easily wipes clean and rosion nadium alloy steel (Cr-V) for exceptional nd durability xceeds ASME B107.110 Levent CF-Handle andle provides more leverage to break free stub to rescure socket retention use with 1 hand on each side of drive tang polish chrome finish easily wipes clean s corrosion nadium alloy steel (Cr-V) for exceptional nd durability xceeds ASME B107.110 | ength (mm) 140.0 | |

1/4" Drive Spinner Handle

- Ergonomic handle provides the optimal balance of strength and efficiency
- Ball detent for secure socket retention
- High impcact composite handle
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.110



| Article Code | Length (mm) | |
|--------------|-------------|---|
| ST11911SC | 150.0 | 6 |

1/4" Drive Universal Joint

- Universal joint for better access to hard-to-reach fasteners
- Pin hole can be used with detent pin for secure socket retention to the adapter
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.110



These sockets accessories should never be used on power drivers, pneumatic impact wrench and/or extenders.

| Article Code | Length (mm) | |
|--------------|-------------|---|
| ST11912SC | 34.7 | 6 |

1/4" Drive Adapter 3/8"

- Pin hole can be used with detent pin for secure socket retention to the adapter
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.110



These sockets accessories should never be used on power drivers, pneumatic impact wrench and/or extenders.

| Article Code | Length (mm) | |
|--------------|-------------|---|
| ST11913SC | 25.5 | 6 |

1/4" Drive Bit Adapter

- Precise fit for bit in adapter
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.110

| These sockets accessories should never be used on power drivers, pneumatic impact wrench and/or exte | nders. |
|---|-----------|
| Article Code | \$ |
| ST11914SC | 12 |
| 1/4" Drive Flex Extension | |
| Flex shaft allows extension to bend into multiple positions | |
| Reach difficult to access fasteners standard sockets/extensions cannot reach | |
| Makes it possible to move at an angle up to 20° | |
| Designed to access extreme angled fasteners, for use in low torque applications | |
| Pin hole can be used with detent pin for secure socket retention to the extension | |
| Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability | |
| Meets or exceeds ASME B107.110 | |

These sockets accessories should never be used on power drivers, pneumatic impact wrench and/or extenders.

| Article Code | Length (mm) | |
|--------------|-------------|---|
| ST11922SC | 150.0 | 6 |

1/4" Drive Wobble Extensions

- Wobble extension for better reach to more fasteners
- Provides better angled access vs standard non-wobble extension bars
- Knurled grip provides a nonslip surface
- Ball detent for secure socket retention
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.110

These sockets accessories should never be used on power drivers, pneumatic impact wrench and/or extenders.

| Article Code | Size | Length (mm) | |
|--------------|------|-------------|---|
| ST11903SC | 2" | 50.8 | 6 |
| ST11904SC | 4" | 101.6 | 6 |






03 Ratchets, Sockets & Drive Tools

1/4" Drive Bit Sockets

- Precison engineered bits for a better fit on fasteners
- Large stamped size markings provide quick size identification
- Heat treated for long lasting durability
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- S2 steel insert bits offer maximum strength and durability
- Meets or exceeds ASME B107.110



51

(+)

 $(\mathbf{+})$

5 Pc. 3/8" Drive Metric Spark Plug Socket Set

| Article Code | Content | | Article Code | Content | |
|--------------|---|----|--------------|---|----|
| ST09003SJ | 1 - Wobble Extension Bar 6" 1 - Locking Extension Bar 6" 1 - Offset Flex Head Ratchet Handle 2 - Spark Plug Sockets 16, 21mm | 12 | ST09523 | 1 - Quick-Release Round Head Ratchet 12 - 6pt. Metric Sockets 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19 mm | 12 |



22 Pc. 3/8" Drive 6 Point Metric Socket Set

| Article Code | Content | |
|--------------|--|----|
| ST09524 | 1 - Quick-Release Ratchet 14 - 6pt. Metric Sockets 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19 mm 4 - 6pt. Metric Deep Sockets 12, 13, 17, 19 mm 1 - Spark Plug Socket 16 mm 1 - Extension Bar 6" | 10 |

| Article Code | Fastener Size | Length (mm) (Dimension B) | Drive End (mm) (Dimension A) | |
|--------------|---------------|------------------------------|---------------------------------|----|
| SC21301 | Phillips #1 | 36.5 | 12.0 | 12 |
| SC21302 | Phillips #2 | 36.5 | 12.0 | 12 |
| SC21303 | Phillips #3 | 36.5 | 12.0 | 12 |

| Article Code | Fastener Size | Length (mm) (Dimension B) | Drive End (mm) (Dimension A) | (|
|--------------|---------------|------------------------------|---------------------------------|----------|
| SC21401 | Pozidriv #1 | 36.5 | 12.0 | 12 |
| SC21402 | Pozidriv #2 | 36.5 | 12.0 | 12 |
| SC21403 | Pozidriv #3 | 36.5 | 12.0 | 12 |

| Article Code | Fastener Size | Length (mm) (Dimension B) | Drive End (mm) (Dimension A) | \$ |
|--------------|----------------|------------------------------|---------------------------------|-----------|
| SC21501 | Slotted 4.0 mm | 36.5 | 12.0 | 12 |
| SC21502 | Slotted 5.5 mm | 36.5 | 12.0 | 12 |
| SC21503 | Slotted 6.5 mm | 36.5 | 12.0 | 12 |

| Article Code | Fastener Size | Length (mm) (Dimension B) | Drive End (mm) (Dimension A) | |
|--------------|---------------|------------------------------|---------------------------------|----|
| SC21201 | Hex 3.0 mm | 36.5 | 12.0 | 12 |
| SC21202 | Hex 4.0 mm | 36.5 | 12.0 | 12 |
| SC21203 | Hex 5.0 mm | 36.5 | 12.0 | 12 |
| SC21204 | Hex 6.0 mm | 36.5 | 12.0 | 12 |
| SC21206 | Hex 7.0 mm | 36.5 | 12.0 | 12 |
| SC21205 | Hex 8.0 mm | 36.5 | 12.0 | 12 |

| Article Code | Fastener Size | Length (mm) (Dimension B) | Drive End (mm) (Dimension A) | |
|--------------|-----------------------|------------------------------|---------------------------------|----|
| SC21101 | Torx® T8 | 36.5 | 12.0 | 12 |
| SC21102 | Torx® T10 | 36.5 | 12.0 | 12 |
| SC21103 | Torx® T15 | 36.5 | 12.0 | 12 |
| ST21104SC | Torx [®] T20 | 36.5 | 12.0 | 12 |
| ST21105SC | Torx® T25 | 36.5 | 12.0 | 12 |
| ST21108BU | Torx® T27 | 36.5 | 12.0 | 12 |
| ST21106 | Torx® T30 | 36.5 | 12.0 | 12 |
| SC21107 | Torx® T40 | 36.5 | 12.0 | 12 |



58

These sockets accessories should never be used on power drivers, pneumatic impact wrench and/or extenders.



| Ì | |
|---|--|
| _ | |

14 Pc. 3/8" Drive 6 Point Metric Socket Set





60 Pc. 3/8" Drive 6 Point Metric Socket Set

| Article Code | Content | ý |
|--------------|--|---|
| ST09004SJ | Quick-Release Ratchet 6pt. Metric Sockets 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 24 mm 6pt. Metric Deep Sockets 8, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19 mm Spark Plug Sockets 16, 21 mm 24 - Bit Sockets Slotted 5.5, 6.5, 8 mm Phillips #1 (2x), #2 (2x), #3 Torx[®] T10, T15, T20, T25, T30, T40, T45, T50, T55 Hex 3, 4, 5, 6, 7, 8, 10 mm 4 - Accessories Wobble Extension Bars 3", 10" Universal Joint 1/2"F x 3/8"M 3-Way Adapter | 3 |



16 Pc. 3/8" Drive 6 Point SAE Socket Set

| Article Code | Content | |
|--------------|--|----|
| ST09085SJ | Quick-Release Ratchet 6pt. SAE Sockets 1/4, 5/16, 3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8" Accessories Wobble Extensions 3", 6" Flex Handle 8" 1/2"F x 3/8"M 3-Way Adapter | 12 |




3/8" Drive 6 Point Socket

- Single hex (6 pt.) fastener end design
- Off-corner loading design reduces fastener rounding
- Large markings offer easy size identification
- Double line (SAE) & knurled line (MM) to easily identify standard and metric sockets
- Manufactured to industrial specifications assuring a thin wall design with precise nut end dimensions
- Heat treated for long lasting durability
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.110

| Article Code | Fastener Size | Overall Length (mm) (Dimension C) | Drive End (mm) (Dimension A) | Wrench End (mm) (Dimension B) | ý |
|--------------|---------------|--------------------------------------|---------------------------------|----------------------------------|---|
| ST12301SC | 6.0 mm | 25.0 | 17.0 | 10.0 | 6 |
| ST12302SC | 7.0 mm | 25.0 | 17.0 | 10.8 | 6 |
| ST12303SC | 8.0 mm | 25.0 | 17.0 | 11.9 | 6 |
| ST12304SC | 9.0 mm | 25.0 | 17.0 | 12.9 | 6 |
| ST12305SC | 10.0 mm | 25.0 | 17.0 | 14.5 | 6 |
| ST12306SC | 11.0 mm | 25.0 | 17.0 | 15.8 | 6 |
| ST12307SC | 12.0 mm | 25.0 | 17.0 | 17.0 | 6 |
| ST12308SC | 13.0 mm | 25.0 | 18.3 | 18.3 | 6 |
| ST12309SC | 14.0 mm | 25.0 | 19.5 | 19.5 | 6 |
| ST12310SC | 15.0 mm | 25.0 | 20.8 | 20.8 | 6 |
| ST12311SC | 16.0 mm | 25.0 | 22.0 | 22.0 | 6 |
| ST12312SC | 17.0 mm | 25.0 | 23.3 | 23.3 | 6 |
| ST12313SC | 18.0 mm | 25.0 | 23.8 | 23.8 | 6 |
| ST12314SC | 19.0 mm | 28.0 | 25.5 | 19.0 | 6 |
| ST12315SC | 20.0 mm | 28.0 | 27.0 | 23.0 | 4 |
| ST12316SC | 21.0 mm | 28.0 | 27.5 | 25.0 | 4 |
| ST12317SC | 22.0 mm | 31.5 | 29.5 | 26.0 | 4 |
| ST12318SC | 24.0 mm | 31.5 | 31.9 | 26.0 | 4 |
| ST12101SC | 1/4" | 25.0 | 17.2 | 10.9 | 6 |
| ST12102SC | 5/16″ | 25.0 | 17.2 | 11.9 | 6 |
| ST12103SC | 3/8" | 25.0 | 17.2 | 13.8 | 6 |
| ST12104SC | 7/16″ | 25.0 | 17.2 | 16.0 | 6 |
| ST12105SC | 1/2" | 25.0 | 17.9 | 17.9 | 6 |
| ST12106SC | 9/16" | 25.0 | 19.7 | 19.7 | 6 |
| ST12107SC | 5/8" | 25.0 | 22.2 | 22.2 | 6 |
| ST12108SC | 11/16″ | 25.0 | 23.9 | 23.9 | 6 |
| ST12109SC | 3/4" | 25.0 | 25.6 | 25.6 | 6 |
| ST12110SC | 13/16″ | 28.0 | 27.9 | 27.9 | 6 |
| SC12111 | 7/8″ | 28.0 | 29.7 | 29.7 | 6 |








3/8" Drive 12 Point Socket

- Double hex (12 pt.) fastener end design
- Off-corner loading design reduces fastener rounding
- Large markings offer easy size identification
- Double line (SAE) & knurled line (MM) to easily identify standard and metric sockets
- Manufactured to industrial specifications assuring a thin wall design with precise nut end dimensions
- Heat treated for long lasting durability
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.110







| Article Code | Fastener Size | Overall Length (mm) (Dimension C) | Drive End (mm) (Dimension A) | Wrench End (mm) (Dimension B) | (|
|--------------|---------------|--------------------------------------|---------------------------------|----------------------------------|----------|
| ST12601BU | 8.0 mm | 25.0 | 17.0 | 11.9 | 6 |
| ST12602BU | 9.0 mm | 25.0 | 17.0 | 12.9 | 6 |
| ST12603BU | 10.0 mm | 25.0 | 17.0 | 14.5 | 6 |
| ST12604BU | 11.0 mm | 25.0 | 17.0 | 15.8 | 6 |
| ST12605BU | 12.0 mm | 25.0 | 17.0 | 17.0 | 6 |
| ST12606BU | 13.0 mm | 25.0 | 18.3 | 18.3 | 6 |
| ST12607BU | 14.0 mm | 25.0 | 19.5 | 19.5 | 6 |
| ST12608BU | 15.0 mm | 25.0 | 20.8 | 20.8 | 6 |
| ST12609BU | 16.0 mm | 25.0 | 22.0 | 22.0 | 6 |
| ST12610BU | 17.0 mm | 25.0 | 23.3 | 23.3 | 6 |
| ST12611BU | 18.0 mm | 25.0 | 23.8 | 23.8 | 6 |
| ST12612BU | 19.0 mm | 28.0 | 25.5 | 19.0 | 6 |
| ST12613BU | 20.0 mm | 28.0 | 27.0 | 23.0 | 4 |
| ST12614BU | 21.0 mm | 28.0 | 27.5 | 25.0 | 4 |
| ST12615BU | 22.0 mm | 31.5 | 29.5 | 26.0 | 4 |
| ST12616BU | 24.0 mm | 31.5 | 31.9 | 26.0 | 4 |

3/8" Drive 6 Point Deep Socket

- Single hex (6 pt.) fastener end design
- Off-corner loading design reduces fastener rounding
- Deep socket to reach more fasteners
- Large markings offer easy size identification
- Double line (SAE) & knurled line (MM) to easily identify standard and metric sockets
- Manufactured to industrial specifications assuring a thin wall design with precise nut end dimensions
- Heat treated for long lasting durability
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.110


These sockets accessories should never be used on power drivers, pneumatic impact wrench and/or extenders.

| Article Code | Fastener Size | Overall Length (mm) (Dimension C) | Drive End (mm) (Dimension A) | Wrench End (mm) (Dimension B) | \$ |
|--------------|---------------|--------------------------------------|---------------------------------|----------------------------------|-----------|
| ST12401SC | 8.0 mm | 63.5 | 16.8 | 11.9 | 6 |
| ST12402SC | 9.0 mm | 63.5 | 16.8 | 12.9 | 6 |
| ST12403SC | 10.0 mm | 63.5 | 16.8 | 14.5 | 6 |
| ST12404SC | 11.0 mm | 63.5 | 16.8 | 15.8 | 6 |
| ST12405SC | 12.0 mm | 63.5 | 16.8 | 16.8 | 6 |
| ST12406SC | 13.0 mm | 63.5 | 18.7 | 18.7 | 6 |
| ST12407SC | 14.0 mm | 63.5 | 19.5 | 19.5 | 6 |
| ST12408SC | 15.0 mm | 63.5 | 20.8 | 20.8 | 6 |
| ST12409SC | 16.0 mm | 63.5 | 22.0 | 22.0 | 6 |
| ST12410SC | 17.0 mm | 63.5 | 23.7 | 23.7 | 6 |
| ST12411SC | 18.0 mm | 63.5 | 23.8 | 23.8 | 6 |
| ST12412SC | 19.0 mm | 63.5 | 25.5 | 25.5 | 6 |
| ST12413SC | 20.0 mm | 63.5 | 27.0 | 27.0 | 4 |
| ST12414SC | 21.0 mm | 63.5 | 27.8 | 27.8 | 4 |
| ST12415SC | 22.0 mm | 63.5 | 29.5 | 29.5 | 4 |
| SC12201 | 3/8" | 63.5 | 16.8 | 13.8 | 6 |
| SC12202 | 7/16″ | 63.5 | 16.8 | 16.0 | 6 |
| SC12203 | 1/2" | 63.5 | 18.3 | 18.3 | 6 |
| SC12204 | 9/16″ | 63.5 | 19.8 | 19.8 | 6 |
| SC12205 | 5/8" | 63.5 | 22.0 | 22.0 | 6 |
| SC12206 | 11/16″ | 63.5 | 23.8 | 23.8 | 6 |
| SC12207 | 3/4" | 63.5 | 25.6 | 25.6 | 6 |
| SC12208 | 13/16″ | 63.5 | 27.8 | 27.8 | 6 |
| SC12209 | 7/8" | 63.5 | 29.8 | 29.8 | 6 |



dard and metric sockets all design with precise

sts corrosion n and durability



3/8" Drive External Torx® Sockets

- Off-corner loading design reduces fastener rounding
- Large markings offer easy size identification
- Manufactured to industrial specifications assuring a thin wall design with precise nut end dimensions
- Heat treated for long lasting durability
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durabilit
- Meets or exceeds Camcar TXF-701

These sockets accessories should never be used on power drivers, pneumatic impact wrench and/or extenders.

| Article Code | Fastener Size | Overall Length (mm) (Dimension C) | Drive End (mm) (Dimension A) | Wrench End (mm) (Dimension B) | \$ |
|--------------|---------------|--------------------------------------|---------------------------------|----------------------------------|-----------|
| ST12701SC | E4 | 26.0 | 17.0 | 7.0 | 6 |
| ST12702SC | E5 | 26.0 | 17.0 | 8.0 | 6 |
| ST12703SC | E6 | 26.0 | 17.0 | 8.0 | 6 |
| ST12704SC | E7 | 26.0 | 17.0 | 9.0 | 6 |
| ST12705SC | E8 | 26.0 | 17.0 | 10.5 | 6 |
| ST12706SC | E10 | 26.0 | 17.0 | 13.0 | 6 |
| ST12707SC | E11 | 26.0 | 17.0 | 14.0 | 6 |
| ST12708SC | E12 | 26.0 | 17.0 | 15.0 | 6 |
| ST12709SC | E14 | 28.5 | 18.3 | 18.3 | 6 |
| ST12710SC | E16 | 28.5 | 18.3 | 18.3 | 6 |
| ST12711SC | E18 | 28.5 | 19.5 | 19.5 | 6 |
| ST12712SC | E20 | 30.5 | 22.0 | 22.0 | 6 |

3/8" Drive Spark Plug Socket

- Single hex (6 pt.) fastener end design
- Off-corner loading design reduces fastener rounding
- Large markings offer easy size identification
- Manufactured to industrial specifications assuring a thin wall design with precise nut end dimensions
- Heat treated for long lasting durability
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.110

These sockets accessories should never be used on power drivers, pneumatic impact wrench and/or extenders.

| Article Code | Fastener Size | |
|--------------|---------------|---|
| ST12915SC | 16.0 mm | 6 |
| ST12916SC | 21.0 mm | 6 |
| ST12919SC | 5/8" | 6 |
| ST12920SC | 13/16" | 6 |



3/8" Drive Quick-Release Stubby Ratchet

- Stubby handle length for improved access
- Quick release design allows rapid socket removal
- Flush mounted reversing lever allows user to change direction with one hand without removing the wrench
- Teardrop, low-profile head and flush-mounted on/off switch allow better access in tight spaces
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.110

| Article Code | Ler |
|--------------|-----|
| ST12960SC | |

3/8" Drive Quick-Release Round Head Ratchet


- Quick release design allows rapid socket removal
- 60-tooth design requires as little as 6° of swing arc to move a fastener
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.110

| Article Code | L |
|--------------|---|
| ST12901SC | |

3/8" Drive Quick-Release Teardrop Ratchet

- Quick release design allows rapid socket removal
- 60-tooth design requires as little as 6° of swing arc to move a fastener
- Flush mounted reversing lever allows user to change direction with one hand without removing the wrench
- Teardrop, low-profile head and flush-mounted on/off switch allow better access in tight spaces
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.110



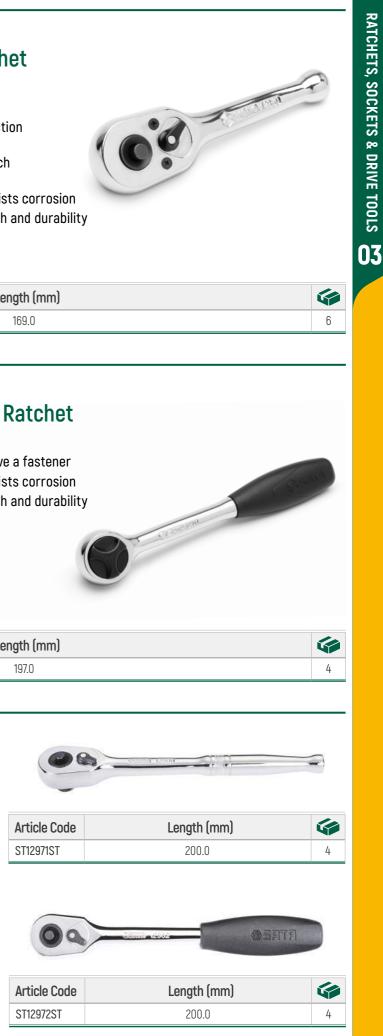

3/8" Drive Offset Flex Quick-Release Teardrop Ratchet

- Quick release design allows rapid socket removal
- 45-tooth design requires as little as 8° of swing arc to move a fastener
- Flush mounted reversing lever allows user to change direction with one hand without removing the wrench
- Flex head provides access for hard to reach angeled fasteners
- Teardrop, low-profile head and flush-mounted on/off switch allow better access in tight spaces
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.110

| Article Code | Length (mm) | |
|--------------|-------------|---|
| ST12911SC | 275.0 | 4 |

3/8" Drive Heavy Duty Offset Quick-Release Teardrop Ratchet

- Quick release design allows rapid socket removal
- 60-tooth design requires as little as 6° of swing arc to move a fastener
- Flush mounted reversing lever allows user to change direction with one hand without removing the wrench



- Teardrop, low-profile head and flush-mounted on/off switch allow better access in tight spaces
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.110

| Article Code | Length (mm) | |
|--------------|-------------|---|
| ST12970SC | 217.0 | 4 |

1/2" Drive Extendable Ratchet

- Quick release design allows rapid socket removal
- 60-tooth design requires as little as 6° of swing arc to move a fastener

Flush mounted reversing lever allows user to change



- direction with one hand without removing the wrench
- Extends from 300 to 440 mm to reach hard-to-reach fasteners (6 positions)
- Ergonomic dual material improves grip and torque while reducing hand fatigue
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.110

| Article Code | Length (mm) | |
|--------------|---------------|---|
| ST13992BU | 300.0 - 440.0 | 4 |

3/8" Drive 120XP Ratchet

- Designed with 120 positions providing a 3° swing arc so you
- Designed with two double stacked 60-tooth pawls for except
- Enclosed ratchet head design resists dirt infiltration for co and efficient execution
- Up to 50% thinner than conventional ratchet systems
- Teardrop, low-profile head and flush-mounted on/off switcl allow better access in tight spaces
- Flush mounted reversing lever allows user to change direction with one hand without removing the wrench
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.110

| Article Code | Le |
|--------------|----|
| ST12974 | |

3/8" Drive Flex Handle / Breaker Bar

- Handle for more leverage to break stubborn fasteners free
- Flex head drive for multiple angles of use
- One-Piece alloy steel construction for rugged performance
- Ball detent helps to secure the socket to the drive tang
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.110

| Article Code | Le |
|--------------|----|
| ST12909SC | |

3/8" Drive T-Handle

- Sliding T-Handle provides more leverage to break free stuble
- Ball detent for secure socket retention
- Allows for use with one hand on each side of drive tang
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.110

| Article Code | Le |
|--------------|----|
| ST12910SC | |



| u can turn fasteners in tighter confines eptional strength ontinuous | 1 |
|--|-----------------|
| ch | |
| E | |
| ength (mm) 200.0 | () 10 |
| | |
| | 1 |
| e | |
| e | |
| ength (mm) 213.0 | 6 |
| 213.0 | 0 |
| oborn fasteners | - |
| | |
| .ength (mm) | \$ |
| 247.0 | 6 |
| | |

03 Ratchets, Sockets & Drive Tools

3/8" Drive Universal Joint

- Universal joint for better access to hard-to-reach fasteners
- Pin hole can be used with detent pin for secure socket retention to the adapter
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.110



These sockets accessories should never be used on power drivers, pneumatic impact wrench and/or extenders.

| Article Code | Length (mm) | |
|--------------|-------------|---|
| ST12912SC | 51.2 | 6 |

3/8" Drive Adapter

- Pin hole can be used with detent pin for secure socket retention to the adapter
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.110





These sockets accessories should never be used on power drivers, pneumatic impact wrench and/or extenders.

| Article Code | Size | Length (mm) | |
|--------------|------|-------------|---|
| ST12913SC | 1/4" | 25.6 | 6 |
| ST12914SC | 1/2" | 25.7 | 6 |

3/8" Drive Bit Adapter 1/4"


- Precise fit for bit in adapter
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Chrome vanadium allov steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.110

3/8" Drive 3-Way Adapter 1/2"

- 3 Position adapter
- Pin hole can be used with detent pin for secure socket retention to the adapter



- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durabilit
- Meets or exceeds ASME B107.110



| | Article Code | 4 |
|--|--------------|---|
| | ST12930SC | 6 |

3/8" Drive Flex Extension

- Flex shaft allows extension to bend into multiple positions
- Reach difficult to access fasteners standard sockets/extensions cannot reach
- Makes it possible to move at an angle up to 20°
- Designed to access extreme angled fasteners, for use in low torque applications
- Pin hole can be used with detent pin for secure socket retention to the extension
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.110

| These soc | kets accessories should never be used on power drivers, pne |
|--------------|---|
| Article Code | Le |
| ST12922SC | |

3/8" Drive Wobble Extensions

- Wobble extension for better reach to more fasteners
- Provides better angled access versus standard non-wobble extension bars
- Knurled grip provides a nonslip surface
- Ball detent for secure socket retention
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Meets or exceeds ASME B107.110

These sockets accessories should never be used on power drivers, pneumatic impact wrench and/or extenders.

| Article Code | Size | Length (mm) | |
|--------------|------|-------------|---|
| ST12903SC | 3" | 76.2 | 6 |
| ST12904SC | 6" | 152.4 | 6 |
| ST12905SC | 10″ | 254.0 | 6 |

3/8" Drive Locking Extension

- Locking extension for better reach to more fasteners
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Locking mechanism securely attaches socket to extension
- Knurled grip provides a nonslip surface
 - Ball detent for secure socket retention
 - Meets or exceeds ASME B107.110

These sockets accessories should never be used on power drivers, pneumatic impact wrench and/or extenders.

| Article Code | Size | Length (mm) | \$ |
|--------------|------|-------------|-----------|
| ST12906SC | 3" | 76.2 | 6 |
| ST12907SC | 6″ | 152.4 | 6 |
| ST12908SC | 10" | 254.0 | 6 |

68

Article Code ST12917SC



6

These sockets accessories should never be used on power drivers, pneumatic impact wrench and/or extenders.






03 Ratchets, Sockets & Drive Tools

3/8" Drive Bit Sockets

- Precison engineered bits for a better fit on fasteners
- Large stamped size markings provide quick size identification
- Heat treated for long lasting durability
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- S2 steel insert bits offer maximum strength and durability
- Meets or exceeds ASME B107.110



(+)

 $(\mathbf{*})$

Length (mm) Drive End (mm) Article Code Fastener Size (Dimension A) nsion B SC22301 Phillips #1 48.0 18.0 6 SC22302 Phillips #2 48.0 18.0 6 254 18.0 SC22303 Phillips #3 6 Length (mm) Drive End (mm) Article Code Fastener Size (Dimension B) (Dimension A) SC22401 Pozidriv #1 48.0 18.0 6 SC22402 Pozidriv #2 48.0 18.0 6

| SC22403 | Pozidriv #3 | 254 | 18.0 | 6 |
|--------------|----------------|------------------------------|---------------------------------|---|
| Article Code | Fastener Size | Length (mm) (Dimension B) | Drive End (mm) (Dimension A) | |
| SC22504 | Slotted 4.0 mm | 48.0 | 18.0 | 6 |
| SC22501 | Slotted 5.5 mm | 48.0 | 18.0 | 6 |
| SC22502 | Slotted 6.5 mm | 48.0 | 18.0 | 6 |
| SC22503 | Slotted 8.0 mm | 48.0 | 18.0 | 6 |

| Article Code | Fastener Size | Length (mm) (Dimension B) | Drive End (mm) (Dimension A) | \$ |
|--------------|---------------|------------------------------|---------------------------------|-----------|
| SC22201 | Hex 3.0 mm | 48.0 | 18.0 | 6 |
| SC22202 | Hex 4.0 mm | 48.0 | 18.0 | 6 |
| SC22203 | Hex 5.0 mm | 48.0 | 18.0 | 6 |
| SC22204 | Hex 6.0 mm | 48.0 | 18.0 | 6 |
| SC22205 | Hex 7.0 mm | 48.0 | 18.0 | 6 |
| SC22206 | Hex 8.0 mm | 48.0 | 18.0 | 6 |
| SC22207 | Hex 10.0 mm | 48.0 | 18.0 | 6 |

| Article Code | Fastener Size | Length (mm) (Dimension B) | Drive End (mm) (Dimension A) | 4 |
|--------------|-----------------------|------------------------------|---------------------------------|---|
| SC22101 | Torx® T10 | 48.0 | 18.0 | 6 |
| SC22102 | Torx® T15 | 48.0 | 18.0 | 6 |
| SC22103 | Torx® T20 | 48.0 | 18.0 | 6 |
| SC22104 | Torx® T25 | 48.0 | 18.0 | 6 |
| SC22105 | Torx® T27 | 48.0 | 18.0 | 6 |
| SC22106 | Torx® T30 | 48.0 | 18.0 | 6 |
| SC22107 | Torx [®] T40 | 48.0 | 18.0 | 6 |
| SC22108 | Torx® T45 | 48.0 | 18.0 | 6 |
| SC22109 | Torx® T50 | 48.0 | 18.0 | 6 |
| SC22110 | Torx® T55 | 48.0 | 18.0 | 6 |
| SC22111 | Torx® T60 | 48.0 | 18.0 | 6 |

| Article Code | Fastener Size | Length (mm) (Dimension B) | Drive End (mm) (Dimension A) | |
|--------------|------------------------|------------------------------|---------------------------------|---|
| SC22601 | Tamper Proof Torx® T45 | 48.0 | 18.0 | 6 |
| SC22602 | Tamper Proof Torx® T50 | 48.0 | 18.0 | 6 |
| SC22603 | Tamper Proof Torx® T55 | 48.0 | 18.0 | 6 |
| SC22604 | Tamper Proof Torx® T60 | 48.0 | 18.0 | 6 |

70

These sockets accessories should never be used on power drivers, pneumatic impact wrench and/or extenders.

16 Pc. 1/2" Drive 6 Point Metric Socket Set


| Article Code | Content | \$ | Article Code | Content | \$ |
|--------------|---|-----------|--------------|--|-----------|
| ST09520 | 10 - 6pt. Metric Sockets 8, 10, 12, 13, 14, 17, 19, 21, 22, 24 mm 6 - 6pt. Metric Deep Sockets 10, 12, 14, 17, 19, 21 mm | 8 | ST09525SJ | 1 - Quick-Release Round Head Ratchet 13 - 6pt. Metric Sockets 10, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 24 mm 1 - Wobble Extension Bar 5" | 2 |



17 Pc. 1/2" Drive 12 Point Metric Socket Set

| Article Code | Content | | Article Code | Content | |
|--------------|--|---|--------------|--|---|
| ST09086SJ | 1 - Quick-Release Ratchet 13 - 12pt. Metric Sockets 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24 mm 1 - Spark Plug Socket 16 mm 2 - Accessories Wobble Extension 5" Flex Handle 10" | 6 | ST09203SJ | 1 - Quick-Release Ratchet 14 - 12pt. Metric Sockets 10, 11, 12, 13, 14, 15, 16, 17, 19, 21, 24, 27, 30, 32 mm 3 - Accessories Wobble Extensions 5", 10" T-Handle | 6 |





| 二二 |
|-----------|
| <u>Un</u> |
| |
| |



15 Pc. 1/2" Drive 6 Point Metric Socket Set



18 Pc. 1/2" Drive 12 Point Metric Socket Set



03 Ratchets, Sockets & Drive Tools

18 Pc. 1/2" Drive 12 Point Metric Socket Set

| Article Code | Content | | Article |
|--------------|--|---|---------|
| ST09204SJ | 1 - Quick-Release Ratchet 14 - 12pt. Metric Sockets 10, 11, 12, 13, 14, 15, 16, 17, 19, 21, 24, 27, 30, 32 mm 3 - Accessories Wobble Extensions 5", 10" T-Handle | 6 | ST0900 |

23 Pc. 1/2" Drive 6 Point Metric Socket Set

| | Article Code | Content | |
|---|--------------|---|---|
| 6 | ST09005SJ | 1 - Quick-Release Ratchet 12 - 6pt. Metric Sockets 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 22, 24 mm 7 - 6pt. Metric Deep Sockets 13, 17, 19, 27, 30, 32, 34 mm 4 - Accessories Wobble Extension Bars 3", 10" Universal Joint 1/2"F x 3/8"M 3-Way Adapter | 4 |





24 Pc. 1/2" Drive 6 Point Metric

Socket Set

23 Pc. 1/2" Drive 6 Point Metric Socket Set

| Article Code | Content | | Article Code | Content |
|--------------|---|---|--------------|--|
| ST09526 | 1 - Quick-Release Round Head Ratchet 15 - 6pt. Metric Sockets 10, 12, 13, 14, 15, 16, 17, 18, 19, 22, 24, 27, 30, 32, 34 mm 4 - 6pt. Metric Deep Sockets 12, 14, 17, 19 mm 2 - Spark Plug Sockets 16, 21 mm 1 - Extension Bar 10" | 4 | ST09060-6SJ | 1 - Quick-Release Ratchet 19 - 6pt Metric Sockets 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 27, 30, 32 mm 4 - Accessories Wobble Extension 5", 10" Univeresal Joint T-Handle |





24 Pc. 1/2" Drive 12 Point Metric Socket Set

| Article Code | Content | | Article Code | Content | |
|--------------|--|---|--------------|--|---|
| ST09060SJ | 1 - Quick-Release Ratchet 19 - 12pt. Metric Sockets 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 27, 30, 32 mm 4 - Accessories Wobble Extension Bars 5", 10" Universal Joint T-Handle | 4 | ST09092ME-12 | Quick-Release Ratchet 12pt. Metric Sockets 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 27, 30, 32 mm Spark Plug Socket 21 mm Accessories Wobble Extension 10" Universal Joint Flex handle | 4 |



28 Pc. 1/2" Drive 12 Point Metric Socket Set

| Article Code | Content | (|
|--------------|--|----------|
| ST09090SJ | 1 - Quick-Release Ratchet 21 - 12pt. Metric Sockets 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 30, 32 mm 6 - Accessories Wobble Extensions 5", 10" Flex Handle 10" T-Handle Universal Joint Speed Handle | 4 |



RATCHETS, SOCKETS & DRIVE TOOLS

25 Pc. 1/2" Drive 12 Point Metric Socket Set





03 Ratchets, Sockets & Drive Tools

60 Pc. 1/2" Drive 6 Point Metric Socket Set

| Article Code | Content | |
|--------------|--|---|
| ST09007SJ | Quick-Release Ratchet 6pt. Metric Sockets 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 24, 27, 30, 32 mm 6pt. Metric Deep Sockets 10, 11, 12, 13, 14, 15, 16, 17, 18, 19 mm 1/4" Shank 25L Bits Pozidriv #1, #2, #3 Hex 2, 3, 4, 5, 6, 7, 8 Torx T8, T10, T15, T20, T25, T27, T30, T40 1/4" Shank 25L Bits Slotted 4, 5.5, 6.5 mm Phillips #1, #2, #3 Accessories Spark Plug Sockets 16, 21 mm Wobble Extension Bars 5", 10" Universal Joint 3/8"F x 1/2"M 3-Way Adapter 1/4" Bit Adapter 1/4" Dr. Socket Driver | 3 |



22 Pc. 1/2" Drive 12 Point SAE Socket Set

| Article Code | Content | |
|--------------|--|---|
| ST09088SJ | 1 - Quick-Release Ratchet 15 - 12pt. SAE Sockets 5/16", 3/8", 7/16", 1/2", 9/16", 5/8", 11/16", 3/4", 13/16", 7/8", 15/16", 1", 1-1/16", 1-1/8", 1-1/4" 6 - Accessories Wobble Extension Bars 5", 10" T-Handle Universal Joint Flex handle 10" Quick rocker | 3 |

20 Pc. 1/2" Drive 6 and 12 Point SAE Socket Set

| Article Code | Content | \$ |
|--------------|--|-----------|
| ST09087SJ | 1 - Quick-Release Ratchet 8 - 6pt. SAE Sockets 5/16, 3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4" 7 - 12pt. SAE Sockets 13/16, 7/8, 15/16, 1, 1-1/16, 1-1/8, 1-1/4" 4 - Accessories Wobble Extensions 5", 10" Flex Handle 15" 3/8"F x 1/2"M 3-Way Adapter | 4 |



46 Pc. 1/2" Drive 6 Point Metric/SAE Socket Set

| Article Code | Content | |
|--------------|---|---|
| ST09006SJ | Quick-Release Ratchet 6pt. Metric Sockets 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 24, 27, 30, 32, 34 mm 6pt. Metric Deep Sockets 10, 12, 13, 14, 15, 17, 19 mm 6pt. SAE Sockets 3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8, 15/16, 1" Metric Spark Plug Sockets 16, 21 mm Accessories Flex Handle 10" Wobble Extensions 5", 10" Universal Joint 3/8"F x 1/2"M 3-Way Adapter | 3 |








1/2" Drive 6 Point Socket

- Single hex (6 pt.) fastener end design
- Off-corner loading design reduces fastener rounding
- Large markings offer easy size identification
- Double line (SAE) & knurled line (MM) to easily identify standard and metric sockets
- Manufactured to industrial specifications assuring a thin wall design with precise nut end dimensions
- Heat treated for long lasting durability
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.110



These sockets accessories should never be used on power drivers, pneumatic impact wrench and/or extenders.


| Article Code | Fastener Size | Overall Length (mm) (Dimension C) | Drive End (mm) (Dimension A) | Wrench End (mm) (Dimension B) | \$ |
|--------------|---------------|--------------------------------------|---------------------------------|----------------------------------|-----------|
| ST13319SC | 8.0 mm | 38.0 | 22.2 | 13.3 | 6 |
| ST13320SC | 9.0 mm | 38.0 | 22.2 | 14.3 | 6 |
| ST13301SC | 10.0 mm | 38.0 | 22.2 | 15.3 | 6 |
| ST13302SC | 11.0 mm | 38.0 | 22.2 | 16.5 | 6 |
| ST13303SC | 12.0 mm | 38.0 | 22.2 | 17.8 | 6 |
| ST13304SC | 13.0 mm | 38.0 | 22.2 | 19.0 | 6 |
| ST13305SC | 14.0 mm | 38.0 | 22.2 | 20.3 | 6 |
| ST13306SC | 15.0 mm | 38.0 | 22.2 | 22.2 | 6 |
| ST13307SC | 16.0 mm | 38.0 | 22.2 | 22.2 | 6 |
| ST13308SC | 17.0 mm | 38.0 | 23.9 | 23.9 | 6 |
| ST13309SC | 18.0 mm | 38.0 | 24.9 | 24.9 | 6 |
| ST13310SC | 19.0 mm | 38.0 | 25.9 | 24.0 | 6 |
| ST13311SC | 20.0 mm | 38.0 | 27.8 | 24.0 | 4 |
| ST13312SC | 21.0 mm | 38.0 | 27.9 | 24.0 | 4 |
| ST13313SC | 22.0 mm | 38.0 | 29.9 | 26.0 | 4 |
| ST13314SC | 23.0 mm | 40.0 | 31.1 | 26.0 | 4 |
| ST13315SC | 24.0 mm | 40.0 | 31.9 | 26.0 | 4 |
| ST13316SC | 27.0 mm | 40.0 | 35.9 | 29.0 | 4 |
| ST13324 | 28.0 mm | 40.0 | 37.6 | 30.0 | 4 |
| ST13317SC | 30.0 mm | 42.0 | 39.9 | 33.0 | 2 |
| ST13318SC | 32.0 mm | 42.0 | 41.9 | 34.0 | 2 |
| ST13321SC | 34.0 mm | 42.0 | 43.9 | 35.0 | 2 |
| ST13101SC | 5/16″ | 37.8 | 22.2 | 13.3 | 6 |
| ST13102SC | 3/8" | 37.8 | 22.2 | 14.5 | 6 |
| ST13103SC | 7/16″ | 37.8 | 22.2 | 17.0 | 6 |
| ST13104SC | 1/2" | 37.8 | 22.2 | 18.6 | 6 |
| ST13105SC | 9/16″ | 37.8 | 22.2 | 20.6 | 6 |
| ST13106SC | 5/8" | 37.8 | 22.2 | 22.2 | 6 |
| ST13107SC | 11/16″ | 37.8 | 23.8 | 23.8 | 6 |
| ST13108SC | 3/4" | 37.8 | 25.9 | 25.9 | 6 |
| ST13109SC | 13/16" | 37.8 | 27.9 | 27.9 | 4 |
| ST13110SC | 7/8" | 37.8 | 29.9 | 29.9 | 4 |
| ST13111SC | 15/16" | 37.8 | 31.9 | 31.9 | 4 |
| ST13112SC | 1" | 40.0 | 33.9 | 33.9 | 4 |
| ST13113SC | 1.1/16″ | 40.0 | 35.9 | 35.9 | 4 |
| ST13114SC | 1.1/8" | 42.0 | 37.9 | 37.9 | 4 |
| ST13115SC | 1.1/4" | 42.0 | 41.9 | 41.9 | 2 |

1/2" Drive 12 Point Socket

- Double hex (12 pt.) fastener end design
- Off-corner loading design reduces fastener rounding
- Large markings offer easy size identification
- Double line (SAE) & knurled line (MM) to easily identify standard and metric sockets
- Manufactured to industrial specifications assuring a thin wall design with precise nut end dimensions
- Heat treated for long lasting durability
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.110


These sockets accessories should never be used on power drivers, pneumatic impact wrench and/or extenders.

| Article Code | Fastener Size | Overall Length (mm) (Dimension C) | Drive End (mm) (Dimension A) | Wrench End (mm) (Dimension B) | |
|--------------|---------------|--------------------------------------|---------------------------------|----------------------------------|---|
| ST13619SC | 8.0 mm | 38.0 | 22.2 | 13.3 | 6 |
| ST13620SC | 9.0 mm | 38.0 | 22.2 | 14.3 | 6 |
| ST13601SC | 10.0 mm | 38.0 | 22.2 | 15.3 | 6 |
| ST13602SC | 11.0 mm | 38.0 | 22.2 | 16.5 | 6 |
| ST13603SC | 12.0 mm | 38.0 | 22.2 | 17.8 | 6 |
| ST13604SC | 13.0 mm | 38.0 | 22.2 | 19.0 | 6 |
| ST13605SC | 14.0 mm | 38.0 | 22.2 | 20.3 | 6 |
| ST13606SC | 15.0 mm | 38.0 | 22.2 | 22.2 | 6 |
| ST13607SC | 16.0 mm | 38.0 | 22.2 | 22.2 | 6 |
| ST13608SC | 17.0 mm | 38.0 | 23.9 | 23.9 | 6 |
| ST13609SC | 18.0 mm | 38.0 | 24.9 | 24.9 | 6 |
| ST13610SC | 19.0 mm | 38.0 | 25.9 | 24.0 | 6 |
| ST13611SC | 20.0 mm | 38.0 | 27.8 | 24.0 | 4 |
| ST13612SC | 21.0 mm | 38.0 | 27.9 | 24.0 | 4 |
| ST13613SC | 22.0 mm | 38.0 | 29.9 | 26.0 | 4 |
| ST13614SC | 23.0 mm | 40.0 | 31.1 | 26.0 | 4 |
| ST13615SC | 24.0 mm | 40.0 | 31.9 | 26.0 | 4 |
| ST13616SC | 27.0 mm | 40.0 | 35.9 | 29.0 | 4 |
| ST13617SC | 30.0 mm | 42.0 | 39.9 | 33.0 | 2 |
| ST13618SC | 32.0 mm | 42.0 | 41.9 | 34.0 | 2 |
| ST13501SC | 5/16″ | 37.8 | 22.2 | 13.3 | 6 |
| ST13502SC | 3/8" | 37.8 | 22.2 | 14.5 | 6 |
| ST13503SC | 7/16″ | 37.8 | 22.2 | 17.0 | 6 |
| ST13504SC | 1/2" | 37.8 | 22.2 | 18.6 | 6 |
| ST13505SC | 9/16″ | 37.8 | 22.2 | 20.6 | 6 |
| ST13506SC | 5/8″ | 37.8 | 22.2 | 22.2 | 6 |
| ST13507SC | 11/16″ | 37.8 | 23.8 | 23.8 | 6 |
| ST13508SC | 3/4" | 37.8 | 25.9 | 25.9 | 4 |
| ST13509SC | 13/16″ | 37.8 | 27.9 | 27.9 | 4 |
| ST13510SC | 7/8″ | 37.8 | 29.9 | 29.9 | 4 |
| ST13511SC | 15/16″ | 37.8 | 31.9 | 31.9 | 4 |
| ST13512SC | 1" | 40.0 | 33.9 | 33.9 | 4 |
| ST13513SC | 1.1/16″ | 40.0 | 35.9 | 35.9 | 4 |
| ST13514SC | 1.1/8″ | 42.0 | 37.9 | 37.9 | 4 |
| ST13515SC | 1.1/4" | 42.0 | 41.9 | 41.9 | 2 |



1/2" Drive 6 Point Deep Socket

- Single hex (6 pt.) fastener end design
- Off-corner loading design reduces fastener rounding
- Deep socket to reach more fasteners
- Large markings offer easy size identification
- Double line (SAE) & knurled line (MM) to easily identify standard and metric sockets
- Manufactured to industrial specifications assuring a thin wall design with precise nut end dimensions
- Heat treated for long lasting durability
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.110



| Article Code | Fastener Size | Overall Length (mm) (Dimension C) | Drive End (mm) (Dimension A) | Wrench End (mm) (Dimension B) | \$ |
|--------------|---------------|--------------------------------------|---------------------------------|----------------------------------|-----------|
| ST13401SC | 10.0 mm | 77.0 | 22.0 | 15.3 | 6 |
| ST13402SC | 11.0 mm | 77.0 | 22.0 | 16.5 | 6 |
| ST13403SC | 12.0 mm | 77.0 | 22.0 | 17.8 | 6 |
| ST13404SC | 13.0 mm | 77.0 | 22.0 | 19.0 | 6 |
| ST13405SC | 14.0 mm | 77.0 | 22.0 | 20.3 | 6 |
| ST13406SC | 15.0 mm | 77.0 | 22.0 | 22.0 | 6 |
| ST13407SC | 16.0 mm | 77.0 | 22.0 | 22.0 | 6 |
| ST13408SC | 17.0 mm | 77.0 | 23.8 | 23.8 | 6 |
| ST13409SC | 18.0 mm | 77.0 | 24.8 | 24.8 | 6 |
| ST13410SC | 19.0 mm | 77.0 | 25.8 | 25.8 | 6 |
| ST13411SC | 20.0 mm | 77.0 | 27.8 | 27.8 | 4 |
| ST13412SC | 21.0 mm | 77.0 | 27.8 | 27.8 | 4 |
| ST13413SC | 22.0 mm | 77.0 | 29.8 | 29.8 | 4 |
| ST13414SC | 24.0 mm | 77.0 | 31.8 | 31.8 | 4 |
| ST13415SC | 27.0 mm | 77.0 | 35.8 | 35.8 | 4 |
| ST13416SC | 30.0 mm | 77.0 | 39.8 | 39.8 | 2 |
| ST13417SC | 32.0 mm | 77.0 | 41.8 | 41.8 | 2 |
| ST13201SC | 3/8" | 77.0 | 22.0 | 14.5 | 6 |
| ST13202SC | 7/16″ | 77.0 | 22.0 | 17.0 | 6 |
| ST13203SC | 1/2" | 77.0 | 22.0 | 18.6 | 6 |
| ST13204SC | 9/16" | 77.0 | 22.0 | 20.6 | 6 |
| ST13205SC | 5/8″ | 77.0 | 22.0 | 22.0 | 6 |
| ST13206SC | 11/16″ | 77.0 | 23.8 | 23.8 | 6 |
| ST13207SC | 3/4" | 77.0 | 25.8 | 25.8 | 6 |
| ST13208SC | 13/16″ | 77.0 | 27.8 | 27.8 | 4 |
| ST13209SC | 7/8″ | 77.0 | 29.8 | 29.8 | 4 |
| ST13210SC | 15/16″ | 77.0 | 31.8 | 31.8 | 4 |
| ST13211SC | 1" | 77.0 | 33.8 | 33.8 | 4 |
| ST13212SC | 1.1/16" | 77.0 | 35.8 | 35.8 | 4 |
| ST13213SC | 1.1/8" | 77.0 | 37.8 | 37.8 | 4 |
| SC13214 | 1.1/4" | 77.0 | 41.8 | 41.8 | 6 |



1/2" Drive 12 Point Deep Socket

- Double hex (12 pt.) fastener end design
- Off-corner loading design reduces fastener rounding
- Deep socket to reach more fasteners
- Large markings offer easy size identification
- Double line (SAE) & knurled line (MM) to easily identify standard and metric sockets
- Manufactured to industrial specifications assuring a thin wall design with precise nut end dimensions
- Heat treated for long lasting durability
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.110

These sockets accessories should never be used on power drivers, pneumatic impact wrench and/or extenders.


| Article Code | Fastener Size | Overall Length (mm) (Dimension C) | Drive End (mm) (Dimension A) | Wrench End (mm) (Dimension B) | \$ |
|--------------|---------------|--------------------------------------|---------------------------------|----------------------------------|-----------|
| ST13810 | 10.0 mm | 77.0 | 22.0 | 15.3 | 6 |
| ST13812 | 12.0 mm | 77.0 | 22.0 | 17.8 | 6 |
| ST13813 | 13.0 mm | 77.0 | 22.0 | 19.0 | 6 |
| ST13814 | 14.0 mm | 77.0 | 22.0 | 20.3 | 6 |
| ST13816 | 16.0 mm | 77.0 | 22.0 | 22.0 | 6 |
| ST13817 | 17.0 mm | 77.0 | 23.8 | 23.8 | 6 |
| ST13818 | 18.0 mm | 77.0 | 24.8 | 24.8 | 6 |
| ST13819 | 19.0 mm | 77.0 | 25.8 | 25.8 | 6 |

1/2" Drive 6 Point VDE Insulated Socket

- VDE Certified
- For use in high voltage areas, up to 1000 V alternating current
- Red socket base color for quick identification of VDE
- Single hex (6 pt.) fastener end design
- Off-corner loading design reduces fastener rounding

These sockets accessories should never be used on power drivers, pneumatic impact wrench and/or extenders.

| Article Code | Fastener Size | Overall Length (mm) (Dimension C) | Drive End (mm) (Dimension A) | Wrench End (mm) (Dimension B) | (|
|--------------|---------------|--------------------------------------|---------------------------------|----------------------------------|----------|
| ST14010SC | 10.0 mm | 55.0 | 22.0 | 27.0 | 12 |
| ST14011SC | 11.0 mm | 55.0 | 22.0 | 27.0 | 12 |
| ST14012SC | 12.0 mm | 55.0 | 22.0 | 27.0 | 12 |
| ST14013SC | 13.0 mm | 55.0 | 22.0 | 27.0 | 12 |
| ST14014SC | 14.0 mm | 55.0 | 22.0 | 27.0 | 12 |
| ST14016SC | 16.0 mm | 55.0 | 22.0 | 27.0 | 12 |
| ST14017SC | 17.0 mm | 55.0 | 22.0 | 27.0 | 12 |
| ST14018SC | 18.0 mm | 55.0 | 22.0 | 27.0 | 12 |
| ST14019SC | 19.0 mm | 55.0 | 22.0 | 27.0 | 12 |
| ST14021SC | 21.0 mm | 55.0 | 22.0 | 27.0 | 10 |
| ST14022SC | 22.0 mm | 55.0 | 22.0 | 27.0 | 10 |
| ST14024SC | 24.0 mm | 55.0 | 22.0 | 27.0 | 10 |



- Large markings offer easy size identification
- Heat treated for long lasting durability Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability Meets or exceeds ASME B107.110



1/2" Drive 6 Point VDE Insulated Hexagon Socket

VDE Certified

- For use in high voltage areas, up to 1000 V alternating current
- Red socket base color for quick identification of VDE
- Precison engineered bits for a better fit on fasteners
- Large stamped size markings provide quick size identification
- Heat treated for long lasting durability
- S2 steel insert bits offer maximum strength and durability
- Meets or exceeds ASME B107.110



DE 1000

These sockets accessories should never be used on power drivers, pneumatic impact wrench and/or extenders.

| Article Code | Fastener Size | Length (mm) | Width (mm) | Hight (mm) | \$ |
|--------------|---------------|-------------|------------|------------|-----------|
| ST24404IEC | 4.0 mm | 117.0 | 22.0 | 27.0 | 6 |
| ST24405IEC | 5.0 mm | 117.0 | 22.0 | 27.0 | 6 |
| ST24406IEC | 6.0 mm | 117.0 | 22.0 | 27.0 | 6 |
| ST24408IEC | 8.0 mm | 117.0 | 22.0 | 27.0 | 18 |
| ST24410IEC | 10.0 mm | 117.0 | 22.0 | 27.0 | 18 |

1/2" Drive Spark Plug Sockets

- Single hex (6 pt.) fastener end design
- Off-corner loading design reduces fastener rounding
- Large markings offer easy size identification
- Manufactured to industrial specifications assuring a thin wall design with precise nut end dimensions
- Heat treated for long lasting durability
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.110



These sockets accessories should never be used on power drivers, pneumatic impact wrench and/or extenders.

| Article Code | Fastener Size | Length (mm) | Width (mm) | Hight (mm) | |
|--------------|---------------|-------------|------------|------------|---|
| ST13915SC | 16.0 mm | 64.0 | 45.0 | 22.0 | 4 |
| ST13916SC | 21.0 mm | 70.0 | 46.0 | 27.0 | 4 |
| ST13917SC | 5/8″ | 64.0 | 45.0 | 22.9 | 4 |
| ST13918SC | 13/16″ | 70.0 | 46.0 | 27.0 | 4 |

1/2" Drive External Torx® Socket

- Off-corner loading design reduces fastener rounding
- Large markings offer easy size identification
- Manufactured to industrial specifications assuring a thin wall design with precise nut end dimensions
- Heat treated for long lasting durability
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds Camcar TXF-701

| Article Code | Fastener Size | Overall Length (mm) (Dimension C) | Drive End (mm) (Dimension A) | Wrench End (mm) (Dimension B) | \$ |
|--------------|---------------|--------------------------------------|---------------------------------|----------------------------------|-----------|
| ST13701SC | E10 | 38.0 | 22.0 | 13.3 | 6 |
| ST13702SC | E12 | 38.0 | 22.0 | 15.0 | 6 |
| ST13703SC | E14 | 38.0 | 22.0 | 17.0 | 6 |
| ST13704SC | E16 | 38.0 | 22.0 | 19.0 | 6 |
| ST13705SC | E18 | 38.0 | 23.8 | 21.0 | 6 |
| ST13706SC | E20 | 38.0 | 25.8 | 23.5 | 4 |
| ST13707SC | E22 | 38.0 | 25.8 | 25.8 | 4 |
| ST13708SC | E24 | 40.0 | 27.8 | 27.8 | 4 |

1/2" Drive Quick-Release Stubby Ratchet

- Stubby handle length for improved access
- Quick release design allows rapid socket removal
- Flush mounted reversing lever allows user to change direction with one hand without removing the wrench
- Teardrop, low-profile head and flush-mounted on/off switch allow better access in tight spaces
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.110

| Article Code | Length (mm) | |
|--------------|-------------|---|
| ST13960SC | 194.0 | 6 |









03 Ratchets, Sockets & Drive Tools

1/2" Drive Quick-Release Round Head Ratchet

- Quick release design allows rapid socket removal
- 60-tooth design requires as little as 6° of swing arc to move a fastener
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.110



| Article Code | Length (mm) | |
|--------------|-------------|---|
| ST13901SC | 244.0 | 4 |

1/2" Drive Quick-Release Teardrop Ratchet

- Quick release design allows rapid socket removal
- 60-tooth design requires as little as 6° of swing arc to move a fastener
- Flush mounted reversing lever allows user to change direction with one hand without removing the ratchet
- Teardrop, low-profile head and flush-mounted on/off switch allow better access in tight spaces
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.110





| Article Code | Length (mm) | |
|--------------|-------------|---|
| ST13972ST | 250.0 | 4 |

1/2" Drive Heavy Duty Offset Quick-Release Teardrop Ratchet

- Quick release design allows rapid socket removal
- 60-tooth design requires as little as 6° of swing arc to move a fastener
- Offset handle design provides knuckle clearance in tight access application
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.110

| Article Code | Length (mm) | |
|--------------|-------------|---|
| ST13970SC | 261.0 | 4 |

1/2" Drive 120XP Ratchet

- Designed with 120 positions providing a 3° swing arc so you can turn fasteners in tighter confines
- Designed with two double stacked 60-tooth pawls for exceptional strength
- Enclosed ratchet head design resists dirt infiltration for continuous and efficient execution
- Up to 50% thinner than conventional ratchet systems
- Teardrop, low-profile head and flush-mounted on/off switch allow better access in tight spaces
- Flush mounted reversing lever allows user to change direction with one hand without removing the wrench
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.110

| Article Code | Le |
|--------------|----|
| ST13974 | |

1/2" Insulated Quick-Release Teardrop Ratchet


- VDE Certified
- For use in high voltage areas, up to 1000 V alternating current
- Quick release design allows rapid socket removal
- Flush mounted reversing lever allows user to change direction with one hand without removing the wrench
- Teardrop, low-profile head and flush-mounted on/off switch allow better access in tight spaces
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.110

| Article Code | Lei |
|--------------|-----|
| ST12983SC | |

1/2" Drive Flex Handle / Breaker Bar

- Handle for more leverage to break stubborn fasteners free
- Flex head drive for multiple angles of use
- One-Piece alloy steel construction for rugged performance
- Ball detent helps to secure the socket to the drive tang
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.110

| Article Code | Size | Length (mm) | \$ |
|--------------|------|-------------|-----------|
| ST13909SC | 10″ | 254 | 4 |
| ST13911SC | 15″ | 375 | 4 |
| ST13951SC | 17" | 432 | 4 |

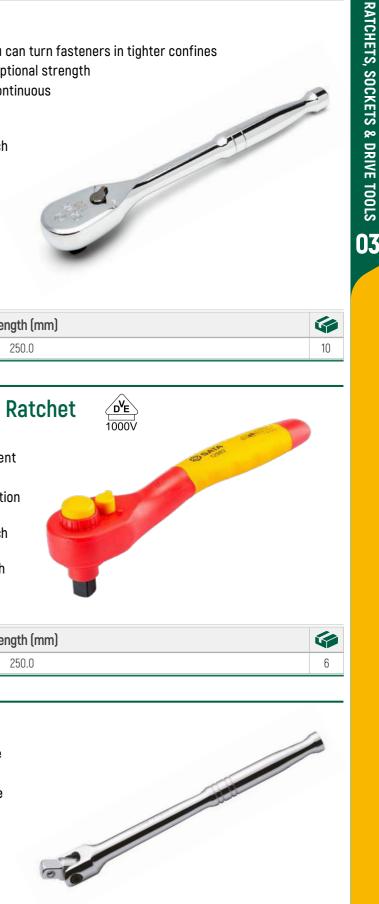

1/2" Drive T-Handle

- Sliding T-Handle provides more leverage to break free stubborn fasteners
- Ball detent for secure socket retention
- Allows for use with one hand on each side of drive tang
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.110

| Article Code | Length (mm) | |
|--------------|-------------|---|
| ST13910SC | 250.0 | 4 |

1/2" Drive Speed Handle

- Free rotating top handle grip delivers ultra-fast action for tightening and removing fasteners
- Ball detent for secure socket retention
- Knurled grip for comfort and control
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.110

| Article Code | Length (mm) | |
|--------------|-------------|---|
| ST17001SC | 410.0 | 6 |

1/2" Drive Offset Handle

- 10" L-Shaped handle for better leverage and torque to break free stubborn fasteners
- Ball detent helps to secure the socket to the wrench
- Offset handles ideal for working in cramped areas
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.110

| Article Code | Length (mm) | \$ |
|--------------|-------------|-----------|
| ST13919SC | 260.0 | 4 |

1/2" Drive Universal Joint

- Universal joint for better access to hard-to-reach fasteners
- Pin hole can be used with detent pin for secure socket retention to the adapter
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.110

| These soc | kets accessories should never be used on power drivers, pne |
|--------------|---|
| Article Code | Le |
| ST13912SC | |

1/2" Drive Adapter

- Pin hole can be used with detent pin for secure socket retention to the adapter
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.110

These sockets accessories should never be used on power drivers, pneumatic impact wrench and/or extenders.

| Article Code | Size | Length (mm) | |
|--------------|------|-------------|---|
| ST13913SC | 3/8" | 35.1 | 4 |
| ST13950SC | 3/4" | 35.1 | 4 |

1/2" Drive Bit Adapter

- Precise fit for bit in adapter
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.110

| Article Code | |
|--------------|--|
| ST13914SC | |





umatic impact wrench and/or extenders.

| ength (mm) | |
|------------|---|
| 68.2 | 4 |







These sockets accessories should never be used on power drivers, pneumatic impact wrench and/or extenders.




1/2" Drive 3-Way Adapter 3/8"

- 3 Position adapter
- Pin hole can be used with detent pin for secure socket retention to the adapter

• Bright, full polish chrome finish easily wipes clean and resists corrosion

- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.110



| Article Code | Length (mm) | (|
|--------------|-------------|----------|
| ST13930SC | 43.6 | 4 |

1/2" Drive Wobble Extensions

- Wobble extension for better reach to more fasteners
- Provides better angled access versus standard non-wobble extension bars
- Knurled grip provides a nonslip surface
- Ball detent for secure socket retention
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.110

These sockets accessories should never be used on power drivers, pneumatic impact wrench and/or extenders.

| Article Code | Size | Length (mm) | |
|--------------|------|-------------|---|
| ST13904SC | 5″ | 127.0 | 4 |
| ST13905SC | 10" | 254.0 | 4 |

1/2" Drive Locking Extensions

- Locking extension for better reach to more fasteners
- Locking mechanism securely attaches socket to extension
- Knurled grip provides a nonslip surface
- Ball detent for secure socket retention
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.110

These sockets accessories should never be used on power drivers, pneumatic impact wrench and/or extenders.

| Article Code | Size | Length (mm) | |
|--------------|------|-------------|---|
| ST13906SC | 3" | 76.2 | 4 |
| ST13907SC | 5″ | 127.0 | 4 |
| ST13908SC | 10" | 254.0 | 4 |

1/2" Insulated Extension

- VDE Certified
- For use in high voltage areas, up to 1000 V alternating current
- Extension for better reach to more fasteners
- Ball detent for secure socket retention
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.110

| Article Code | Length (mm) | |
|--------------|-------------|---|
| ST12985SC | 55.0 | 6 |

1/2" Drive Bit Sockets

- Precison engineered bits for a better fit on fasteners
- Large stamped size markings provide quick size identification
- Heat treated for long lasting durability

| Article Code | Fastener Size | Length (mm) (Dimension B) | Drive End (mm) (Dimension A) | 4 |
|--------------|---------------|------------------------------|---------------------------------|---|
| ST24201SC | Hex 4.0 mm | 75.0 | 24.0 | 6 |
| ST24202SC | Hex 5.0 mm | 75.0 | 24.0 | 6 |
| ST24203SC | Hex 6.0 mm | 75.0 | 24.0 | 6 |
| ST24204SC | Hex 7.0 mm | 75.0 | 24.0 | 6 |
| ST24205SC | Hex 8.0 mm | 75.0 | 24.0 | 6 |
| ST24206SC | Hex 10.0 mm | 75.0 | 24.0 | 6 |
| ST24207SC | Hex 12.0 mm | 75.0 | 24.0 | 6 |
| ST24208SC | Hex 14.0 mm | 75.0 | 24.0 | 6 |
| ST24209SC | Hex 17.0 mm | 75.0 | 24.0 | 6 |
| ST24401BU | Hex 1/4" | 75.0 | 24.0 | 6 |
| ST24402BU | Hex 5/16" | 75.0 | 24.0 | 6 |
| ST24403BU | Hex 3/8" | 75.0 | 24.0 | 6 |
| SC24404 | Hex 7/16" | 75.0 | 24.0 | 6 |
| SC24405 | Hex 1/2" | 75.0 | 24.0 | 6 |
| ST24406BU | Hex 9/16" | 75.0 | 24.0 | 6 |
| ST24407BU | Hex 5/8" | 75.0 | 24.0 | 6 |






10000



neumatic impact wrench and/or extenders.

Bright, full polish chrome finish easily wipes clean and resists corrosion S2 steel insert bits offer maximum strength and durability Meets or exceeds ASME B107.110




Continued on next page

03 Ratchets, Sockets & Drive Tools

Continued from previous page

1/2" Drive Bit Sockets

- Precison engineered bits for a better fit on fasteners
- Large stamped size markings provide quick size identification
- Heat treated for long lasting durability
- Bright, full polish chrome finish easily wipes clean and resists corrosion • S2 steel insert bits offer maximum



Meets or exceeds ASME B107.110

strength and durability

| Article Code | Fastener Size | Length (mm) (Dimension B) | Drive End (mm) (Dimension A) | \$ |
|--------------|---------------|------------------------------|---------------------------------|-----------|
| ST24101SC | Torx® T20 | 75.0 | 24.0 | 6 |
| ST24102SC | Torx® T25 | 75.0 | 24.0 | 6 |
| ST24103SC | Torx® T27 | 75.0 | 24.0 | 6 |
| ST24104SC | Torx® T30 | 75.0 | 24.0 | 6 |
| ST24105SC | Torx® T40 | 75.0 | 24.0 | 6 |
| ST24106SC | Torx® T45 | 75.0 | 24.0 | 6 |
| ST24107SC | Torx® T50 | 75.0 | 24.0 | 6 |
| ST24108SC | Torx® T55 | 75.0 | 24.0 | 6 |
| ST24109SC | Torx® T60 | 75.0 | 24.0 | 6 |

| Article Code | Fastener Size | Length (mm) (Dimension B) | Drive End (mm) (Dimension A) | \$ |
|--------------|-------------------|------------------------------|---------------------------------|-----------|
| ST24801SC | Triple Square M5 | 75.0 | 24.0 | 6 |
| ST24802SC | Triple Square M6 | 75.0 | 24.0 | 6 |
| ST24803SC | Triple Square M8 | 75.0 | 24.0 | 6 |
| ST24804SC | Triple Square M10 | 75.0 | 24.0 | 6 |
| ST24805SC | Triple Square M12 | 75.0 | 24.0 | 6 |
| ST24806SC | Triple Square M14 | 75.0 | 24.0 | 6 |
| ST24807SC | Triple Square M16 | 75.0 | 24.0 | 6 |

These sockets accessories should never be used on power drivers, pneumatic impact wrench and/or extenders.

9 Pc. 1/2" Drive Hex Bit Socket Set

| Article Code | Size | Length (mm) | Content | \$ |
|--------------|---------|-------------|--|-----------|
| ST09057-02 | Hex 10" | 254.0 | 9 - Bit Sockets Hex 4, 5, 6, 7, 8, 10, 12, 14, 17 mm | 12 |

These sockets accessories should never be used on power drivers, pneumatic impact wrench and/or extenders.



1/2" Drive Long Bit Sockets

- Precison engineered bits for a better fit on fasteners
- Long socket to reach more fasteners
- Large stamped size markings provide quick size identification
- Heat treated for long lasting durability

| Article Code | Fastener Size | Length (mm) (Dimension B) | Drive End (mm) (Dimension A) | \$ |
|--------------|---------------|------------------------------|---------------------------------|-----------|
| ST25201SC | Hex 4.0 mm | 125.0 | 24.0 | 6 |
| ST25202SC | Hex 5.0 mm | 125.0 | 24.0 | 6 |
| ST25203SC | Hex 6.0 mm | 125.0 | 24.0 | 6 |
| ST25204SC | Hex 7.0 mm | 125.0 | 24.0 | 6 |
| ST25205SC | Hex 8.0 mm | 125.0 | 24.0 | 6 |
| ST25206SC | Hex 10.0 mm | 125.0 | 24.0 | 6 |
| ST25207SC | Hex 12.0 mm | 125.0 | 24.0 | 6 |
| ST25208SC | Hex 14.0 mm | 125.0 | 24.0 | 6 |
| ST25209SC | Hex 17.0 mm | 125.0 | 24.0 | 6 |


| Article Code | Fastener Size | Length (mm) (Dimension B) |
|--------------|---------------|------------------------------|
| ST25101SC | Torx® T20 | 125.0 |
| ST25102SC | Torx® T25 | 125.0 |
| ST25103SC | Torx® T27 | 125.0 |
| ST25104SC | Torx® T30 | 125.0 |
| ST25105SC | Torx® T40 | 125.0 |
| ST25106SC | Torx® T45 | 125.0 |
| ST25107SC | Torx® T50 | 125.0 |
| ST25108SC | Torx® T55 | 125.0 |
| ST25109SC | Torx® T60 | 125.0 |

| Article Code | Fastener Size | Length (mm) (Dimension B) | Drive End (mm) (Dimension A) | \$ |
|--------------|-------------------|------------------------------|---------------------------------|-----------|
| ST25801SC | Triple Square M5 | 125.0 | 24.0 | 6 |
| ST25802SC | Triple Square M6 | 125.0 | 24.0 | 6 |
| ST25803SC | Triple Square M8 | 125.0 | 24.0 | 6 |
| ST25804SC | Triple Square M10 | 125.0 | 24.0 | 6 |
| ST25805SC | Triple Square M12 | 125.0 | 24.0 | 6 |
| ST25806SC | Triple Square M14 | 125.0 | 24.0 | 6 |
| ST25807SC | Triple Square M16 | 125.0 | 24.0 | 6 |

88

RATCHETS, SOCKETS & DRIVE TOOLS 03

• Bright, full polish chrome finish easily wipes clean and resists corrosion • S2 steel insert bits offer maximum strength and durability • Meets or exceeds ASME B107.110



| Drive End (mm) (Dimension A) | |
|---------------------------------|---|
| 24.0 | 6 |
| 24.0 | 6 |
| 24.0 | 6 |
| 24.0 | 6 |
| 24.0 | 6 |
| 24.0 | 6 |
| 24.0 | 6 |
| 24.0 | 6 |
| 24.0 | 6 |







These sockets accessories should never be used on power drivers, pneumatic impact wrench and/or extenders.


15 Pc. 3/4" Drive 12 Point Socket Set

| Article Code | Description | Content | (|
|--------------|---|--|----------|
| ST09015SJ | 15 Pc. 3/4" Drive 12 Point Metric Socket Set | Quick-Release Ratchet 12pt. Metric Sockets 30, 32, 34, 36, 38, 41, 46, 50, 55, 60 mm Accessories T-Handle Extensions Bars 4", 8" Universal Joint | 1 |
| ST09148SJ | 15 Pc. 3/4" Drive 12 Point SAE Socket Set | 1 - Quick-Release Ratchet 12pt. Metric Sockets 12pt. Metric Sockets 1, 1-1/8', 1-1/4', 1-5/16', 1-3/8', 2'' 4 - Accessories T-Handle Extensions Bars 4'', 8'' | 1 |



3/4" Drive 6 Point Socket

- Single hex (6 pt.) fastener end design
- Off-corner loading design reduces fastener rounding
- Large markings offer easy size identification
- Double line (SAE) & knurled line (MM) to easily identify standard and metric sockets
- Manufactured to industrial specifications assuring a thin wall design with precise nut end dimensions
- Heat treated for long lasting durability
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.110



| Article Code | Size | Overall Length (mm) (Dimension C) | Drive End (mm) (Dimension A) | Wrench End (mm) (Dimension B) | |
|--------------|---------|--------------------------------------|---------------------------------|----------------------------------|---|
| ST16401SC | 19.0 mm | 47.5 | 36.0 | 28.5 | 6 |
| ST16402SC | 21.0 mm | 49.5 | 36.0 | 31.5 | 6 |
| ST16403SC | 22.0 mm | 49.5 | 36.0 | 32.5 | 6 |
| ST16404SC | 23.0 mm | 49.5 | 36.0 | 33.5 | 6 |
| ST16405SC | 24.0 mm | 49.5 | 36.0 | 34.5 | 6 |
| ST16406SC | 25.0 mm | 50.0 | 36.2 | 35.0 | 6 |
| ST16407SC | 26.0 mm | 50.0 | 37.2 | 36.0 | 6 |



Continued on next page

| RATC |
|---------------|
| CHEI |
| [S, S) |
| DCKE |
| KETS 8 |
| & DRIV |
| · • |
| TOOLS |
| 03 |

| 382 36.0 6 39.2 36.0 6 40.2 38.0 6 44.2 38.0 6 44.2 38.0 6 44.2 38.0 6 44.2 38.0 6 44.2 38.0 6 44.2 38.0 6 44.2 38.0 6 44.2 38.0 6 44.2 38.0 6 48.2 42.0 6 50.2 42.0 6 50.2 45.0 4 66.0 45.0 4 66.0 48.0 2 74.0 48.0 2 80.0 48.0 2 36.0 31.5 6 36.0 31.5 6 36.0 35.0 6 36.0 35.0 6 36.0 35.0 6 36.0 35.0 6 < | n) | Drive End (mm) (Dimension A) | Wrench End (mm) (Dimension B) | \$ |
|--|----|---------------------------------|----------------------------------|-----------|
| 40.2 38.0 6 42.2 38.0 6 44.2 38.0 6 44.2 38.0 6 44.2 38.0 6 44.2 38.0 6 44.2 38.0 6 44.2 38.0 6 44.2 38.0 6 48.2 42.0 6 50.2 42.0 6 52.5 45.0 4 66.0 48.0 4 68.0 48.0 2 74.0 48.0 2 80.0 48.0 2 36.0 31.5 6 36.0 31.5 6 36.0 35.0 6 36.0 35.0 6 36.0 35.0 6 36.0 35.0 6 36.0 35.0 6 36.0 35.0 6 36.0 35.0 6 | | 38.2 | 36.0 | 6 |
| 42.2 38.0 6 44.2 38.0 6 44.2 38.0 6 44.2 38.0 6 44.2 38.0 6 44.2 38.0 6 44.2 38.0 6 48.2 42.0 6 50.2 42.0 6 55.0 45.0 4 66.0 45.0 4 66.0 48.0 2 74.0 48.0 2 80.0 48.0 2 36.0 29.5 6 36.0 31.5 6 36.0 32.5 6 36.0 35.0 6 36.0 35.0 6 36.0 35.0 6 36.0 35.0 6 36.0 35.0 6 37.8 36.0 6 44.2 38.0 6 44.2 38.0 6 | | 39.2 | 36.0 | 6 |
| 442 38.0 6 442 38.0 6 472 38.0 6 482 42.0 6 502 42.0 6 525 45.0 4 620 48.0 4 620 48.0 4 62.0 48.0 2 74.0 48.0 2 80.0 48.0 2 80.0 48.0 2 80.0 48.0 2 36.0 31.5 6 36.0 32.5 6 36.0 35.0 6 36.0 35.0 6 36.0 35.0 6 36.0 35.0 6 36.0 35.0 6 36.0 35.0 6 36.0 35.0 6 36.0 36.0 6 44.2 38.0 6 44.2 38.0 6 | | 40.2 | 38.0 | 6 |
| 46.2 38.0 6 472 38.0 6 48.2 42.0 6 50.2 42.0 6 52.5 45.0 4 66.0 45.0 4 66.0 45.0 4 66.0 48.0 2 74.0 48.0 2 80.0 48.0 2 80.0 48.0 2 36.0 29.5 6 36.0 31.5 6 36.0 32.5 6 36.0 35.0 6 36.0 35.0 6 36.0 35.0 6 36.0 35.0 6 36.0 35.0 6 36.0 35.0 6 36.0 35.0 6 36.0 35.0 6 44.2 38.0 6 44.2 38.0 6 44.2 42.0 6 < | | 42.2 | 38.0 | 6 |
| 472 38.0 6 48.2 42.0 6 50.2 42.0 6 52.5 45.0 4 66.0 45.0 4 66.0 45.0 4 66.0 48.0 4 66.0 48.0 2 74.0 48.0 2 80.0 48.0 2 80.0 48.0 2 36.0 29.5 6 36.0 32.5 6 36.0 32.5 6 36.0 35.0 6 36.0 35.0 6 36.0 35.0 6 36.0 35.0 6 36.0 35.0 6 36.0 35.0 6 36.0 35.0 6 38.0 6 6 44.2 38.0 6 44.2 38.0 6 48.2 42.0 6 <td></td> <td>44.2</td> <td>38.0</td> <td>6</td> | | 44.2 | 38.0 | 6 |
| 48.2 42.0 6 50.2 42.0 6 52.5 45.0 4 66.0 45.0 4 62.0 48.0 4 68.0 48.0 2 74.0 48.0 2 80.0 48.0 2 80.0 48.0 2 36.0 29.5 6 36.0 31.5 6 36.0 34.5 6 36.0 35.0 6 36.0 35.0 6 36.0 35.0 6 36.0 35.0 6 36.0 35.0 6 36.0 35.0 6 36.0 35.0 6 44.2 38.0 6 44.2 38.0 6 44.2 38.0 6 44.2 38.0 6 44.2 42.0 6 50.2 42.0 4 | | 46.2 | 38.0 | 6 |
| 50.2 42.0 6 52.5 45.0 4 56.0 45.0 4 62.0 48.0 4 68.0 48.0 2 74.0 48.0 2 80.0 48.0 2 36.0 29.5 6 36.0 31.5 6 36.0 32.5 6 36.0 32.5 6 36.0 35.0 6 36.0 35.0 6 36.0 35.0 6 36.0 35.0 6 36.0 35.0 6 36.0 35.0 6 36.0 35.0 6 36.0 35.0 6 44.2 38.0 6 44.2 38.0 6 44.2 38.0 6 48.2 42.0 6 48.2 42.0 6 50.2 42.0 4 | | 47.2 | 38.0 | 6 |
| 52.5 45.0 4 56.0 45.0 4 62.0 48.0 4 68.0 48.0 2 74.0 48.0 2 80.0 48.0 2 80.0 48.0 2 80.0 48.0 2 80.0 48.0 2 80.0 48.0 2 80.0 48.0 2 80.0 48.0 2 80.0 48.0 2 80.0 36.0 25.5 6 36.0 31.5 36.0 35.0 6 36.0 35.0 6 37.8 36.0 6 44.2 38.0 6 44.2 38.0 6 44.2 38.0 6 48.2 42.0 6 48.2 42.0 4 50.2 45.0 4 50.2 45.0 4 | | 48.2 | 42.0 | 6 |
| 56.0 45.0 4 62.0 48.0 4 68.0 48.0 2 74.0 48.0 2 80.0 48.0 2 36.0 29.5 6 36.0 31.5 6 36.0 32.5 6 36.0 32.5 6 36.0 32.5 6 36.0 32.5 6 36.0 35.0 6 36.0 35.0 6 36.0 35.0 6 36.0 35.0 6 37.8 36.0 6 39.8 36.0 6 44.2 38.0 6 44.2 38.0 6 44.2 38.0 6 44.2 38.0 6 44.2 42.0 6 50.2 42.0 4 51.5 45.0 4 52.5 45.0 4 | | 50.2 | 42.0 | 6 |
| 62.0 48.0 4 68.0 48.0 2 74.0 48.0 2 80.0 48.0 2 36.0 29.5 6 36.0 31.5 6 36.0 32.5 6 36.0 32.5 6 36.0 34.5 6 36.0 35.0 6 36.0 35.0 6 36.0 35.0 6 36.0 35.0 6 36.0 35.0 6 36.0 35.0 6 36.0 36.0 6 37.8 36.0 6 44.2 38.0 6 44.2 38.0 6 44.2 42.0 6 48.2 42.0 6 50.2 42.0 4 52.5 45.0 4 56.0 45.0 4 56.0 45.0 4 | | 52.5 | 45.0 | 4 |
| 68.0 48.0 2 74.0 48.0 2 80.0 48.0 2 36.0 29.5 6 36.0 31.5 6 36.0 32.5 6 36.0 32.5 6 36.0 32.5 6 36.0 32.5 6 36.0 34.5 6 36.0 35.0 6 36.0 35.0 6 36.0 36.0 6 37.8 36.0 6 39.8 36.0 6 44.2 38.0 6 44.2 38.0 6 44.2 38.0 6 48.2 42.0 6 50.2 42.0 4 52.5 45.0 4 55.5 45.0 4 56.0 45.0 4 60.5 45.0 4 63.5 48.0 2 | | 56.0 | 45.0 | 4 |
| 74.0 48.0 2 80.0 48.0 2 36.0 29.5 6 36.0 31.5 6 36.0 32.5 6 36.0 32.5 6 36.0 34.5 6 36.0 35.0 6 36.0 35.0 6 36.0 35.0 6 36.0 35.0 6 36.0 35.0 6 36.0 35.0 6 37.8 36.0 6 41.8 38.0 6 44.2 38.0 6 44.2 38.0 6 48.2 42.0 6 48.2 42.0 6 50.2 42.0 4 52.5 45.0 4 52.5 45.0 4 55.0 45.0 4 56.0 45.0 4 60.5 45.0 4 | | 62.0 | 48.0 | 4 |
| 80.0 48.0 2 36.0 29.5 6 36.0 31.5 6 36.0 32.5 6 36.0 34.5 6 36.0 35.0 6 36.0 35.0 6 36.0 35.0 6 37.8 36.0 6 39.8 36.0 6 41.8 38.0 6 44.2 38.0 6 44.2 38.0 6 44.2 38.0 6 48.2 42.0 6 50.2 42.0 6 50.2 42.0 4 52.5 45.0 4 53.5 45.0 4 55.0 45.0 4 60.5 45.0 4 60.5 45.0 4 63.5 48.0 2 68.0 48.0 2 68.0 48.0 2 | | 68.0 | 48.0 | 2 |
| 36.0 29.5 6 36.0 31.5 6 36.0 32.5 6 36.0 34.5 6 36.0 34.5 6 36.0 35.0 6 36.0 35.0 6 37.8 36.0 6 39.8 36.0 6 41.8 38.0 6 44.2 38.0 6 44.2 38.0 6 44.2 38.0 6 44.2 38.0 6 44.2 38.0 6 44.2 38.0 6 44.2 38.0 6 45.2 42.0 6 50.2 42.0 4 55.5 45.0 4 56.0 45.0 4 56.0 45.0 4 60.5 45.0 4 60.5 45.0 2 68.0 48.0 2 | | 74.0 | 48.0 | 2 |
| 36.0 31.5 6 36.0 32.5 6 36.0 34.5 6 36.0 35.0 6 36.0 35.0 6 37.8 36.0 6 39.8 36.0 6 41.8 38.0 6 44.2 38.0 6 44.2 38.0 6 44.2 38.0 6 44.2 38.0 6 44.2 38.0 6 44.2 38.0 6 48.2 42.0 6 50.2 42.0 6 50.2 42.0 4 50.2 42.0 4 55.5 45.0 4 56.0 45.0 4 56.0 45.0 4 60.5 45.0 4 60.5 45.0 4 63.5 48.0 2 68.0 48.0 2 | | 80.0 | 48.0 | 2 |
| 36.0 32.5 6 36.0 34.5 6 36.0 35.0 6 36.0 35.0 6 37.8 36.0 6 39.8 36.0 6 41.8 38.0 6 44.2 38.0 6 44.2 38.0 6 44.2 38.0 6 44.2 38.0 6 44.2 38.0 6 44.2 38.0 6 48.2 42.0 6 50.2 42.0 6 50.2 42.0 4 50.2 42.0 4 50.2 45.0 4 50.2 45.0 4 50.2 45.0 4 60.5 45.0 4 60.5 45.0 4 63.5 48.0 2 68.0 48.0 2 70.5 48.0 2 | | 36.0 | 29.5 | 6 |
| 36.0 34.5 6 36.0 35.0 6 37.8 36.0 6 39.8 36.0 6 41.8 38.0 6 44.2 38.0 6 44.2 38.0 6 44.2 38.0 6 44.2 38.0 6 44.2 38.0 6 48.2 42.0 6 48.2 42.0 6 50.2 42.0 4 52.5 45.0 4 53.5 45.0 4 53.5 45.0 4 60.5 45.0 4 63.5 48.0 2 68.0 48.0 2 70.5 48.0 2 72.0 48.0 2 | | 36.0 | 31.5 | 6 |
| 36.0 35.0 6 37.8 36.0 6 39.8 36.0 6 41.8 38.0 6 44.2 38.0 6 44.2 38.0 6 44.2 38.0 6 44.2 38.0 6 44.2 38.0 6 48.2 42.0 6 48.2 42.0 6 50.2 42.0 4 52.5 45.0 4 52.5 45.0 4 53.5 45.0 4 56.0 45.0 4 60.5 45.0 4 63.5 48.0 2 68.0 48.0 2 70.5 48.0 2 72.0 48.0 2 | | 36.0 | 32.5 | 6 |
| 37.8 36.0 6 39.8 36.0 6 41.8 38.0 6 44.2 38.0 6 44.2 38.0 6 44.2 38.0 6 44.2 38.0 6 48.2 42.0 6 48.2 42.0 6 50.2 42.0 4 52.5 45.0 4 52.5 45.0 4 56.0 45.0 4 56.0 45.0 4 60.5 45.0 4 63.5 48.0 2 68.0 48.0 2 70.5 48.0 2 72.0 48.0 2 | | 36.0 | 34.5 | 6 |
| 39.8 36.0 6 41.8 38.0 6 44.2 38.0 6 44.2 38.0 6 46.2 38.0 6 48.2 42.0 6 48.2 42.0 6 50.2 42.0 4 52.5 45.0 4 52.5 45.0 4 55.0 45.0 4 56.0 45.0 4 56.0 45.0 4 60.5 45.0 4 66.5 45.0 4 66.5 45.0 2 68.0 48.0 2 70.5 48.0 2 72.0 48.0 2 | | 36.0 | 35.0 | 6 |
| 41.8 38.0 6 44.2 38.0 6 44.2 38.0 6 46.2 38.0 6 48.2 42.0 6 48.2 42.0 6 50.2 42.0 4 52.5 45.0 4 53.5 45.0 4 56.0 45.0 4 57.0 45.0 4 60.5 45.0 4 60.5 45.0 4 63.5 48.0 2 68.0 48.0 2 70.5 48.0 2 72.0 48.0 2 | | 37.8 | 36.0 | 6 |
| 44.2 38.0 6 46.2 38.0 6 48.2 42.0 6 48.2 42.0 6 50.2 42.0 4 52.5 45.0 4 53.5 45.0 4 56.0 45.0 4 57.0 45.0 4 60.5 45.0 4 63.5 48.0 2 63.5 48.0 2 70.5 48.0 2 72.0 48.0 2 | | 39.8 | 36.0 | 6 |
| 46.2 38.0 6 48.2 42.0 6 48.2 42.0 6 50.2 42.0 4 52.5 45.0 4 53.5 45.0 4 56.0 45.0 4 57.0 45.0 4 60.5 45.0 4 60.5 45.0 4 63.5 48.0 2 70.5 48.0 2 72.0 48.0 2 | | 41.8 | 38.0 | 6 |
| 48.2 42.0 6 48.2 42.0 6 50.2 42.0 4 52.5 45.0 4 53.5 45.0 4 56.0 45.0 4 57.0 45.0 4 60.5 45.0 4 60.5 45.0 4 63.5 48.0 2 68.0 48.0 2 70.5 48.0 2 72.0 48.0 2 | | 44.2 | 38.0 | 6 |
| 48.2 42.0 6 50.2 42.0 4 52.5 45.0 4 53.5 45.0 4 56.0 45.0 4 57.0 45.0 4 60.5 45.0 4 63.5 48.0 2 70.5 48.0 2 72.0 48.0 2 | | 46.2 | 38.0 | 6 |
| 50.2 42.0 4 52.5 45.0 4 53.5 45.0 4 56.0 45.0 4 57.0 45.0 4 60.5 45.0 4 63.5 48.0 2 70.5 48.0 2 72.0 48.0 2 | | 48.2 | 42.0 | 6 |
| 52.5 45.0 4 53.5 45.0 4 56.0 45.0 4 57.0 45.0 4 60.5 45.0 4 63.5 48.0 2 68.0 48.0 2 70.5 48.0 2 | | 48.2 | 42.0 | 6 |
| 53.5 45.0 4 56.0 45.0 4 57.0 45.0 4 60.5 45.0 4 63.5 48.0 2 68.0 48.0 2 70.5 48.0 2 72.0 48.0 2 | | 50.2 | 42.0 | 4 |
| 56.0 45.0 4 57.0 45.0 4 60.5 45.0 4 63.5 48.0 2 68.0 48.0 2 70.5 48.0 2 72.0 48.0 2 | | 52.5 | 45.0 | 4 |
| 57.0 45.0 4 60.5 45.0 4 63.5 48.0 2 68.0 48.0 2 70.5 48.0 2 72.0 48.0 2 | | 53.5 | 45.0 | 4 |
| 60.5 45.0 4 63.5 48.0 2 68.0 48.0 2 70.5 48.0 2 72.0 48.0 2 | | 56.0 | 45.0 | 4 |
| 63.5 48.0 2 68.0 48.0 2 70.5 48.0 2 72.0 48.0 2 | | 57.0 | 45.0 | 4 |
| 68.0 48.0 2 70.5 48.0 2 72.0 48.0 2 | | 60.5 | 45.0 | 4 |
| 70.5 48.0 2 72.0 48.0 2 | | 63.5 | 48.0 | 2 |
| 72.0 48.0 2 | | 68.0 | 48.0 | 2 |
| | | 70.5 | 48.0 | 2 |
| 76.0 48.0 2 | | 72.0 | 48.0 | 2 |
| | | 76.0 | 48.0 | 2 |

3/4" Drive 12 Point Socket

- Double hex (12 pt.) fastener end design
- Off-corner loading design reduces fastener rounding
- Large markings offer easy size identification
- Double line (SAE) & knurled line (MM) to easily identify standard and metric sockets
- Manufactured to industrial specifications assuring a thin wall design with precise nut end dimensions
- Heat treated for long lasting durability
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.110



| | These sockets accessories shoul | I never be used on power | r drivers, pneumatic impact wrench and | d/or extenders. |
|--|---------------------------------|--------------------------|--|-----------------|
|--|---------------------------------|--------------------------|--|-----------------|

| Article Code | Size | Overall Length (mm) (Dimension C) | Drive End (mm) (Dimension A) | Wrench End (mm) (Dimension B) | 4 |
|--------------|---------|--------------------------------------|---------------------------------|----------------------------------|---|
| ST16602SC | 19.0 mm | 47.5 | 36.0 | 28.5 | 6 |
| ST16603SC | 21.0 mm | 49.5 | 36.0 | 31.5 | 6 |
| ST16604SC | 22.0 mm | 49.5 | 36.0 | 32.5 | 6 |
| ST16605SC | 23.0 mm | 49.5 | 36.0 | 33.5 | 6 |
| ST16606SC | 24.0 mm | 49.5 | 36.0 | 34.5 | 6 |
| ST16607SC | 25.0 mm | 50.0 | 36.2 | 35.0 | 6 |
| ST16608SC | 26.0 mm | 50.0 | 37.2 | 36.0 | 6 |
| ST16609SC | 27.0 mm | 52.0 | 38.2 | 36.0 | 6 |
| ST16610SC | 28.0 mm | 52.0 | 39.2 | 36.0 | 6 |
| ST16611SC | 29.0 mm | 52.0 | 40.2 | 38.0 | 6 |
| ST16612SC | 30.0 mm | 54.0 | 42.2 | 38.0 | 6 |
| ST16613SC | 32.0 mm | 56.0 | 44.2 | 38.0 | 6 |
| ST16614SC | 33.0 mm | 56.0 | 46.2 | 38.0 | 6 |
| ST16615SC | 34.0 mm | 56.0 | 47.2 | 38.0 | 6 |
| ST16616SC | 35.0 mm | 56.0 | 48.2 | 42.0 | 6 |
| ST16617SC | 36.0 mm | 58.0 | 50.2 | 42.0 | 6 |
| ST16618SC | 38.0 mm | 60.0 | 52.5 | 45.0 | 4 |
| ST16619SC | 41.0 mm | 64.0 | 56.0 | 45.0 | 4 |
| ST16620SC | 46.0 mm | 68.0 | 62.0 | 48.0 | 4 |
| ST16622SC | 50.0 mm | 72.0 | 68.0 | 48.0 | 2 |
| ST16623SC | 55.0 mm | 76.0 | 74.0 | 48.0 | 2 |
| ST16624SC | 60.0 mm | 78.0 | 80.0 | 48.0 | 2 |

| Article Code | Size | Overall Length (mm) (Dimension C) | Drive End (mm) (Dimension A) | Wrench End (mm) (Dimension B) | \$ |
|--------------|----------|--------------------------------------|---------------------------------|----------------------------------|-----------|
| ST16504SC | 15/16″ | 49.5 | 36.0 | 34.5 | 6 |
| ST16501SC | 3/4" | 49.5 | 36.0 | 29.5 | 6 |
| ST16502SC | 13/16″ | 49.5 | 36.0 | 31.5 | 6 |
| ST16503SC | 7/8" | 49.5 | 36.0 | 32.5 | 6 |
| ST16505SC | 1″ | 50.0 | 36.0 | 35.0 | 6 |
| ST16506SC | 1.1/16" | 52.0 | 37.8 | 36.0 | 6 |
| ST16507SC | 1.1/8" | 54.0 | 39.8 | 36.0 | 6 |
| ST16508SC | 1.3/16″ | 54.0 | 41.8 | 38.0 | 6 |
| ST16509SC | 1.1/4" | 56.0 | 44.2 | 38.0 | 6 |
| ST16510SC | 1.5/16″ | 56.0 | 46.2 | 38.0 | 6 |
| ST16511SC | 1.3/8" | 56.0 | 48.2 | 42.0 | 6 |
| ST16512SC | 1.7/16″ | 60.0 | 48.2 | 42.0 | 6 |
| ST16513SC | 1.1/2" | 60.0 | 50.2 | 42.0 | 4 |
| ST16520SC | 1.9/16″ | 60.0 | 52.5 | 45.0 | 4 |
| ST16514SC | 1.5/8" | 64.0 | 53.5 | 45.0 | 4 |
| ST16515SC | 1.11/16" | 68.0 | 56.0 | 45.0 | 4 |
| ST16516SC | 1.3/4″ | 68.0 | 57.0 | 45.0 | 4 |
| ST16517SC | 1.13/16″ | 68.0 | 60.5 | 45.0 | 4 |
| ST16518SC | 1.7/8″ | 72.0 | 63.5 | 48.0 | 2 |
| ST16519SC | 2" | 73.0 | 68.0 | 48.0 | 2 |
| ST16521SC | 2.1/16" | 74.0 | 70.5 | 48.0 | 2 |
| ST16522SC | 2.1/8" | 76.0 | 72.0 | 48.0 | 2 |
| ST16523SC | 2.1/4" | 80.0 | 76.0 | 48.0 | 2 |

3/4" Drive Quick-Release Teardrop Ratchet

- Quick release design allows rapid socket removal
- Flush mounted reversing lever allows user to change direction with one hand without removing the wrench
- Teardrop, low-profile head and flush-mounted on/off switch allow better access in tight spaces
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.110

| Article Code | Len |
|--------------|-----|
| ST16901SC | |

| RATCHETS, |
|-------------|
| , SOCKETS |
| & DRIVE TOO |
| ເມີ ເມີ |





500.0

3/4" Drive Flex Handle / Breaker Bar 19"

- Handle for more leverage to break stubborn fasteners free
- Flex head drive for multiple angles of use
- One-Piece alloy steel construction for rugged performance
- Ball detent helps to secure the socket to the drive tang
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.110



| Article Code | Length (mm) | |
|--------------|-------------|---|
| ST16906SC | 450.0 | 1 |

3/4" Drive T-Handle

- Sliding T-Handle provides more leverage to break free stubborn fasteners
- Ball detent for secure socket retention
- Allows for use with one hand on each side of drive tang
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.110

| Article Code | Length (mm) | |
|--------------|-------------|---|
| ST16905SC | 450.0 | 1 |

3/4" Drive Offset Handle

- 13" L-Shaped handle for better leverage and torgue to break free stubborn fasteners
- Ball detent helps to secure the socket to the wrench
- Offset handles ideal for working in cramped areas
- Chrome vanadium alloy steel (Cr-V) for exceptional
- Meets or exceeds ASME B107.110

| Article Code | Length (mm) | |
|--------------|-------------|---|
| ST16919SC | 380.0 | 4 |

3/4" Drive Universal Joint

- Universal joint for better access to hard-to-reach fasteners
- Pin hole can be used with detent pin for secure socket retention to the adapter
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.110

| These sockets accessories should never be used on power drivers, pneumatic impact wrench and/or extenders. | | | | |
|--|-------------|---|--|--|
| Article Code | Length (mm) | | | |
| ST16907SC | 75.2 | 3 | | |

3/4" Drive Adapter 1/2"

- Pin hole can be used with detent pin for secure socket retention to the adapter
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.110

| These soc | kets accessories should never be used on power drivers, pneumatic impact wrench and/or extenders. | |
|--------------|---|---|
| Article Code | Length (mm) | |
| ST16908SC | 35.1 | 6 |

3/4" Drive Standard Extension Bar

- Locking extension for better reach to more fasteners
- Ball detent for secure socket retention
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.110

These sockets accessories should never be used on power drivers, pneumatic impact wrench and/or extenders.

| Article Code | Size | Length (mm) | \$ |
|--------------|------|-------------|-----------|
| ST16902SC | 4" | 102.0 | 6 |
| ST16903SC | 8" | 203.0 | 3 |
| ST16904SC | 16" | 406.0 | 2 |








Pass-Thru® Ratchet & Socket Systems

30 Pc. 1/4" and 3/8" Drive 6 Point Metric Pass-Thru® Socket Set

| Article Code | Content |
|--------------|--|
| ST09132SJ | 1 - 1/4" Dr. Pass-Thru® Ratchet 1 - 3/8" Dr. Pass-Thru® Ratchet 13 - 1/4" Dr. Metric Pass-Thru® Sockets 3.5, 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13 mm 10 - 3/8" Dr. Metric Pass-Thru® Sockets 10, 11, 12, 13, 14, 15, 16, 17, 18, 19 mm 5 - Accessories 1/4" Dr. Pass-Thru® Extension Bar 3" 1/4" Dr. Quick-Release Adapter 3/8" Dr. x 1/4"M Quick-Release Adapter 3/8" Dr. x 3/8"M Quick-Release Adapter |

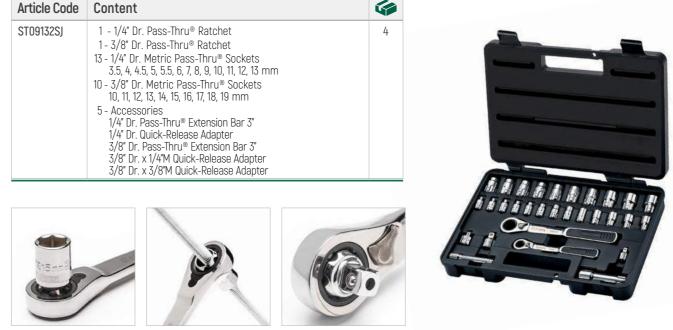

21 Pc. 3/8" Drive 6 Point Metric/SAE Pass-Thru® Socket Set

| Article Code | Content |
|--------------|--|
| ST09134SJ | Pass-Thru[®] Ratchet Metric Pass-Thru[®] Sockets 10, 11, 12, 13, 14, 15, 16, 17, 18, 19 mm SAE Pass-Thru[®] Sockets 3/8, 7/16, 1/2, 5/8, 9/16, 11/16, 3/4" Accessories 3/8" Dr. x 1/4"M Quick-Release Adapter 3/8" Dr. x 3/8"M Quick-Release Adapter Pass-Thru[®] Extension Bar 3" |

25 Pc. 1/4" Drive 6 Point Metric/SAE Pass-Thru® Socket Set

| Article Code | Content |
|--------------|--|
| ST09131SJ | Pass-Thru[®] Ratchet Metric Pass-Thru[®] Sockets 3.5, 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13 mm SAE Pass-Thru[®] Sockets 5/32, 3/16, 7/32, 1/4, 9/32, 5/16, 3/8, 7/16, 1/2" Accessories Quick-Release Adapter Pass-Thru[®] Extension Bar 3" |







1/4" AND 3/8" DRIVE METRIC/SAE **BOLTBITER SETS**







Rapid socket removal

Flush reversing lever







ST09137 ST09138



13 Pc. 1/4" and 3/8" Drive Metric/SAE BoltBiter Set

- Ratchet with quick release design allows rapid socket removal
- Ratchet flush mounted reversing lever allows user to change direction with one hand without removing the wrench
- Removes rusted and rounded fasteners
- Innovative tapered flutes for easy seating onto a damaged fastener
- Bi-directional design removes or tightens damaged fasteners
- Dual sized sockets work with both SAE and metric fasteners
- Hexagonal base for use with impact guns, ratchets, wrenches, or pliers
- Up to 5 times greater gripping force
- Chrome molybdenum alloy steel (Cr-Mo) for exceptional strength and durability
- Comes with a durable blow mold case for storage and organization

| Article Code | Content | |
|--------------|---|---|
| ST09137 | 1 - 3/8" Dr. Quick-Release Ratchet 2 - 1/4" Extraction Sockets 7, 8 mm 8 - 3/8" Extraction Sockets 10, 11, 12, 13, 14, 16, 17, 19 mm 2 - Accessories 3/8" Drive Wobble Extension Bar 6" 3/8" Drive Adapter 3/8"FX1/4"M | 4 |
| | | |



23 PC. 1/4" and 3/8" Drive Metric/SAE BoltBiter Set

- Ratchet with quick release design allows rapid socket removal
- Ratchet flush mounted reversing lever allows user to change direction with one hand without removing the wrench
- Removes rusted and rounded fasteners
- Minus-sized sockets designed to fit extremely worndown fasteners
- Innovative tapered flutes for easy seating onto a damaged fastener
- Bi-directional design removes or tightens damaged fasteners
- Dual sized sockets work with both SAE and metric fasteners
- Hexagonal base for use with impact guns, ratchets, wrenches, or pliers
- Up to 5 times greater gripping force
- Chrome molybdenum alloy steel (Cr-Mo) for exceptional strength and durability
- Comes with a durable blow mold case for storage and organization

| Article Code | Content | \$ |
|--------------|---|-----------|
| ST09138 | 3/8" Dr. Quick-Release Ratchet 1/4" Extraction Sockets 7, 8 mm 1/4" Minus Sized Extraction Sockets -7, -8 mm 3/8" Extraction Sockets 10, 11, 12, 13, 14, 16, 17, 19 mm 3/8" Minus Sized Extraction Sockets -10, -11, -12, -13, -14, -16, -17, -19 mm Accessories 3/8" Drive Wobble Extension Bar 6" 3/8" Drive Adapter 3/8"FX1/4"M | 4 |




BoltBiter Extraction Socket

- Removes rusted and rounded fasteners
- Minus-sized sockets designed to fit extremely worn-down fasteners
- Innovative tapered flutes for easy seating onto a damaged fastener
- Bi-directional design removes or tightens damaged fasteners
- Dual sized sockets work with both SAE and metric fasteners
- Hexagonal base for use with impact guns, ratchets, wrenches, or pliers
- High-visibility laser-etched markings for quick size identification
- Chrome molybdenum alloy steel (Cr-Mo) for exceptional strength and durability
- Black oxide finish to resist corrosion
- Meets or exceeds ASME B107.110

| Article Code | Fastener Size | Overall Length (mm) (Dimension C) | Wrench End (mm) (Dimension B) | \$ |
|--------------|---------------|--------------------------------------|----------------------------------|-----------|
| SC12801 | 1/4" -7.0 mm | 37.5 | 18.0 | 6 |
| SC12802 | 1/4" 7.0 mm | 37.5 | 18.0 | 6 |
| SC12803 | 1/4" -8.0 mm | 37.5 | 18.0 | 6 |
| SC12804 | 1/4" 8.0 mm | 37.5 | 18.0 | 6 |
| SC12807 | 3/8" -10.0 mm | 37.5 | 21.4 | 6 |
| SC12808 | 3/8″ 10.0 mm | 37.5 | 21.4 | 6 |
| SC12809 | 3/8" -11.0 mm | 37.5 | 21.4 | 6 |
| SC12810 | 3/8″ 11.0 mm | 37.5 | 21.4 | 6 |
| SC12811 | 3/8" -12.0 mm | 37.5 | 21.4 | 6 |
| SC12812 | 3/8″ 12.0 mm | 37.5 | 21.4 | 6 |
| SC12814 | 3/8" -13.0 mm | 37.5 | 21.4 | 6 |
| SC12815 | 3/8" 13.0 mm | 37.5 | 21.4 | 6 |
| SC12816 | 3/8" -14.0 mm | 37.5 | 22.0 | 6 |
| SC12817 | 3/8" 14.0 mm | 37.5 | 22.0 | 6 |
| SC12820 | 3/8" -16.0 mm | 37.5 | 24.0 | 6 |
| SC12821 | 3/8" 16.0 mm | 37.5 | 24.0 | 6 |
| SC12822 | 3/8" -17.0 mm | 37.5 | 24.0 | 6 |
| SC12823 | 3/8″ 17.0 mm | 37.5 | 26.0 | 6 |
| SC12826 | 3/8″-19.0 mm | 37.5 | 28.0 | 6 |
| SC12827 | 3/8" 19.0 mm | 37.5 | 28.0 | 6 |



100









Impact Sockets

1/4" Drive Impact Adapter 1/4"F X 3/8"

- Pin hole can be used with detent pin for secure socket retention to the adapter
- For use with impact drivers
- Black oxide finish to resist corrosion
- Chrome molybdenum alloy steel (Cr-Mo) for exceptional strength and durability
- Meets or exceeds ASME B107.110

| Article Code | L |
|--------------|---|
| ST34714SC | |

3/8" Drive Impact Adapter 3/8"F X 1/2"M

- Pin hole can be used with detent pin for secure socket retention to the adapter
- For use with impact drivers
- Black oxide finish to resist corrosion
- Chrome molybdenum alloy steel (Cr-Mo) for exceptional strength and durability
- Meets or exceeds ASME B107.110

| Article Code | Le |
|--------------|----|
| ST34715SC | |

3/8" Drive Impact Universal Joint

- Universal joint for better access to hard-to-reach fasteners
- Pin hole can be used with detent pin for secure socket retention to the adapter
- For use with impact drivers
- Black oxide finish to resist corrosion
- Chrome molybdenum alloy steel (Cr-Mo) for exceptional strength and durability
- Meets or exceeds ASME B107.110

| Article Code | Le |
|--------------|----|
| ST32902 | |



| Μ | | |
|---|--|--|
| | | |



| ength (mm) | |
|------------|---|
| 26.5 | 6 |



| ength (mm) | |
|------------|---|
| 36.0 | 6 |



| 53.0 6 | .ength (mm) | \$ |
|--------|-------------|-----------|
| | 53.0 | 6 |

3/8" Drive Impact Extension

- Extension for better reach to more fasteners
- For use with impact drivers
- Ball detent for secure socket retention
- Black oxide finish to resist corrosion
- Chrome molybdenum alloy steel (Cr-Mo) for exceptional strength and durability
- Meets or exceeds ASME B107.110



| Article Code | Size Length (mm) | | |
|--------------|------------------|-------|---|
| ST34701SC | 3" | 75.0 | 6 |
| ST34702SC | 6" | 150.0 | 6 |

3/8" Drive 6 Point Impact Socket

- Single hex (6 pt.) fastener end design
- For use with impact drivers
- Off-corner loading design reduces fastener rounding
- Large markings offer easy size identification
- Black oxide finish to resist corrosion
- Chrome molybdenum alloy steel (Cr-Mo) for exceptional strength and durability
- Meets or exceeds ASME B107.110



| Article Code | Fastener Size | Overall Length (mm) (Dimension C) | Drive End (mm) (Dimension A) | Wrench End (mm) (Dimension B) | |
|--------------|---------------|--------------------------------------|---------------------------------|----------------------------------|---|
| ST34201BU | 6.0 mm | 28,0 | 18,8 | 10,6 | 6 |
| ST34202SC | 7.0 mm | 28,0 | 18,8 | 11,6 | 6 |
| ST34203SC | 8.0 mm | 28,0 | 18,8 | 12,8 | 6 |
| SC34204 | 9.0 mm | 28,0 | 18,8 | 14,2 | 6 |
| ST34205SC | 10.0 mm | 28,0 | 18,8 | 15,9 | 6 |
| ST34206SC | 11.0 mm | 28,0 | 18,8 | 17,1 | 6 |
| ST34207SC | 12.0 mm | 28,0 | 18,8 | 18,5 | 6 |
| ST34208SC | 13.0 mm | 30,0 | 19,8 | 20.0 | 6 |
| ST34209SC | 14.0 mm | 30,0 | 21,8 | 21.0 | 6 |
| SC34210 | 15.0 mm | 30,0 | 22,0 | 21.0 | 6 |
| ST34211SC | 16.0 mm | 30,0 | 23,8 | 22,0 | 6 |
| ST34212SC | 17.0 mm | 30,0 | 24,8 | 22,0 | 6 |
| SC34213 | 18.0 mm | 30,0 | 25,8 | 22,0 | 6 |
| ST34214SC | 19.0 mm | 30,0 | 26,8 | 22,0 | 6 |

12 Pc. 1/2" Drive 6 Point Metric Impact Socket Set

| Article Code | Content | | Article Code | Content | |
|--------------|---|---|--------------|---|----|
| ST09009SJ | 10 - 6pt. Metric Impact Sockets 10, 11, 13, 14, 17, 19, 21, 22, 23, 24 mm 2 - Accessories Impact Universal Joint Impact Extension Bar 5" | 8 | ST34397T | 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 23, 24 mm | 12 |



13 Pc. 1/2" Drive 6 Point Metric Deep Thin Wall Impact Socket Set

| Article Code | Content | | Article Code | Content | |
|--------------|---|---|--------------|--|----|
| ST34398T | 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24 mm | 6 | ST09008SJ | 10 - 6pt. SAE Impact Sockets 7/16", 1/2", 9/16", 5/8", 11/16", 3/4", 13/16", 7/8", 15/16", 1" 2 - Accessories Impact Universal Joint Impact Extension Bar 5" | 10 |

Excluded from Lifetime Warranty terms



06

14 Pc. 1/2" Drive 6 Point Metric Thin Wall Impact Socket Set



Excluded from Lifetime Warranty terms



12 Pc. 1/2" Drive 6 Point SAE Impact Socket Set



26 PC. 1/2" DRIVE 6 POINT ST34399T **METRIC STANDARD & DEEP** THIN WALL IMPACT SOCKET SET









Single hex (6 pt.) Sockets feature Standard & For use with Large easy ID impact drivers fastener end off-corner deep sockets size markings loading 1/2"



26 Pc. 1/2" Drive 6 Point Metric Standard & Deep Thin Wall Impact Socket Set

| Article Code | Content | |
|--------------|---|---|
| ST34399T | 13 - 6pt. Metric Thin Wall Impact Sockets 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24 mm 13 - 6pt. Metric Thin Wall Deep Impact Sockets 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24 mm | 5 |

Excluded from Lifetime Warranty terms

1/2" Drive Impact Adapter

- Pin hole can be used with detent pin for secure socket retention to the adapter
- For use with impact drivers
- Black oxide finish to resist corrosion
- Chrome molybdenum alloy steel (Cr-Mo) for exceptional strength and durability
- Meets or exceeds ASME B107.110

| Article Code | Size | Length (mm) | |
|--------------|---------------|-------------|---|
| ST34716SC | 1/2"F X 3/8"M | 38.0 | |
| ST34717SC | 1/2"F X 3/4"M | 45.0 | 6 |

1/2" Drive Impact Universal Joint

- Universal joint for better access to hard-to-reach fasteners
- Pin hole can be used with detent pin for secure socket retention to the adapter
- For use with impact drivers
- Black oxide finish to resist corrosion
- Chrome molybdenum alloy steel (Cr-Mo) for exceptional strength and durability
- Meets or exceeds ASME B107.110

| Article Code | Len |
|--------------|-----|
| ST34719SC | |











| | 1. |
|------------|----|
| ength (mm) | |
| 65.5 | 6 |
| | |

1/2" Drive Impact Extension

- Extension for better reach to more fasteners
- For use with impact drivers
- Ball detent for secure socket retention
- Black oxide finish to resist corrosion
- Chrome molybdenum alloy steel (Cr-Mo) for exceptional strength and durability
- Meets or exceeds ASME B107.110

| Article Code | Size | Length (mm) | (|
|--------------|------|-------------|----------|
| ST33911SC | 3" | 75.0 | 4 |
| ST34703SC | 5″ | 125.0 | 6 |
| ST34704SC | 6" | 150.0 | 6 |
| ST34705SC | 10" | 250.0 | 6 |
| ST34706SC | 12" | 300.0 | 6 |

1/2" Drive 6 Point Impact Socket

- Single hex (6 pt.) fastener end design
- For use with impact drivers
- Off-corner loading design reduces fastener rounding
- Large markings offer easy size identification
- Black oxide finish to resist corrosion
- Chrome molybdenum alloy steel (Cr-Mo) for exceptional strength and durability
- Meets or exceeds ASME B107.110




| Article Code | Fastener Size | Overall Length (mm) (Dimension C) | Drive End (mm) (Dimension A) | Wrench End (mm) (Dimension B) | \$ |
|--------------|---------------|--------------------------------------|---------------------------------|----------------------------------|-----------|
| ST34320SC | 27.0 mm | 41.0 | 37.8 | 30.0 | 4 |
| ST34322SC | 29.0 mm | 41.0 | 41.8 | 31.0 | 2 |
| ST34323SC | 30.0 mm | 41.0 | 41.8 | 32.0 | 2 |
| ST34325SC | 32.0 mm | 41.0 | 43.8 | 34.0 | 2 |
| ST33101SC | 7/16″ | 38.0 | 24.8 | 17.5 | 6 |
| ST33102SC | 1/2" | 38.0 | 24.8 | 20.5 | 6 |
| ST33103SC | 9/16″ | 38.0 | 24.8 | 21.7 | 6 |
| ST33104SC | 5/8″ | 38.0 | 24.8 | 23.2 | 6 |
| ST33105SC | 11/16″ | 38.0 | 25.8 | 24.6 | 6 |
| ST33106SC | 3/4″ | 41.0 | 29.8 | 27.2 | 4 |
| ST33107SC | 13/16″ | 41.0 | 31.8 | 28.4 | 4 |
| ST33108SC | 7/8" | 41.0 | 31.8 | 30.0 | 4 |
| ST33109SC | 15/16″ | 41.0 | 35.8 | 30.0 | 4 |
| ST33110SC | 1" | 41.0 | 37.8 | 30.0 | 4 |

1/2" Drive 6 Point Thin Wall Impact Socket

- Thin wall socket design for access in spaces standard sockets will not fit
- Single hex (6 pt.) fastener end design
- For use with impact drivers
- Off-corner loading design reduces fastener rounding
- Large markings offer easy size identification
- Black oxide finish to resist corrosion
- Chrome molybdenum alloy steel (Cr-Mo) for exceptional strength and durability
- Meets or exceeds ASME B107.110
- Excluded from Lifetime Warranty terms

| Article Code | Fastener Size | Overall Length (mm) (Dimension C) | Drive End (mm) (Dimension A) | Wrench End (mm) (Dimension B) | \$ |
|--------------|---------------|--------------------------------------|---------------------------------|----------------------------------|-----------|
| SC34303T | 10.0 mm | 38.0 | 21.8 | 15.3 | 6 |
| SC34304T | 11.0 mm | 38.0 | 21.8 | 16.5 | 6 |
| SC34305T | 12.0 mm | 38.0 | 21.8 | 17.8 | 6 |
| SC34306T | 13.0 mm | 38.0 | 23.8 | 19.0 | 6 |
| SC34307T | 14.0 mm | 38.0 | 23.8 | 20.3 | 6 |
| SC34308T | 15.0 mm | 38.0 | 23.8 | 21.5 | 6 |
| SC34309T | 16.0 mm | 38.0 | 23.8 | 22.8 | 6 |
| SC34310T | 17.0 mm | 38.0 | 23.8 | 23.2 | 6 |
| SC34311T | 18.0 mm | 38.0 | 24.8 | 24.6 | 4 |
| SC34312T | 19.0 mm | 41.0 | 25.8 | 27.2 | 4 |
| SC34314T | 21.0 mm | 41.0 | 27.8 | 28.4 | 4 |
| SC34315T | 22.0 mm | 41.0 | 29.5 | 30.0 | 4 |
| SC34316T | 23.0 mm | 41.0 | 31.1 | 30.0 | 4 |
| SC34317T | 24.0 mm | 41.0 | 31.8 | 30.0 | 4 |
| SC34320T | 27.0 mm | 41.0 | 35.8 | 32.5 | 4 |

| | 10 |
|--|----|
| | 10 |





1/2" Drive 6 Point Impact Deep Socket

- Single hex (6 pt.) fastener end design
- For use with impact drivers
- Off-corner loading design reduces fastener rounding
- Deep socket to reach more fasteners
- Large markings offer easy size identification
- Black oxide finish to resist corrosion
- Chrome molybdenum alloy steel (Cr-Mo) for exceptional strength and durability
- Meets or exceeds ASME B107.110



| Article Code | Fastener Size | Overall Length (mm) (Dimension C) | Drive End (mm) (Dimension A) | Wrench End (mm) (Dimension B) | \$ |
|--------------|---------------|--------------------------------------|---------------------------------|----------------------------------|-----------|
| ST34403SC | 10.0 mm | 82.0 | 24.3 | 14.7 | 6 |
| ST34404SC | 11.0 mm | 82.0 | 24.3 | 15.7 | 6 |
| ST34405SC | 12.0 mm | 82.0 | 24.3 | 18.1 | 6 |
| ST34406SC | 13.0 mm | 82.0 | 24.3 | 18.9 | 6 |
| ST34407SC | 14.0 mm | 82.0 | 24.3 | 20.6 | 4 |
| ST34408SC | 15.0 mm | 82.0 | 24.3 | 21.5 | 6 |
| ST34409SC | 16.0 mm | 82.0 | 24.3 | 22.8 | 6 |
| ST34410SC | 17.0 mm | 82.0 | 25.8 | 23.2 | 6 |
| ST34411SC | 18.0 mm | 82.0 | 27.8 | 24.6 | 6 |
| ST34412SC | 19.0 mm | 82.0 | 29.8 | 27.2 | 4 |
| ST34414SC | 21.0 mm | 82.0 | 31.3 | 28.4 | 4 |
| ST34415SC | 22.0 mm | 82.0 | 31.8 | 30.0 | 4 |
| ST34417SC | 24.0 mm | 82.0 | 33.8 | 30.0 | 4 |
| ST34419SC | 26.0 mm | 82.0 | 37.8 | 30.0 | 4 |
| ST34420SC | 27.0 mm | 82.0 | 37.8 | 30.0 | 4 |
| ST34422SC | 29.0 mm | 82.0 | 39.8 | 31.0 | 2 |
| ST34423SC | 30.0 mm | 82.0 | 41.8 | 32.0 | 2 |
| ST34425SC | 32.0 mm | 82.0 | 43.8 | 34.0 | 2 |

1/2" Drive 6 Point Thin Wall Impact Deep Socket

- Thin wall socket design for access in spaces standard sockets will not fit
- Single hex (6 pt.) fastener end design
- For use with impact drivers
- Off-corner loading design reduces fastener rounding
- Deep socket to reach more fasteners
- Large markings offer easy size identification
- Black oxide finish to resist corrosion
- Chrome molybdenum alloy steel (Cr-Mo) for exceptional strength and durability
- Meets or exceeds ASME B107.110

Excluded from Lifetime Warranty terms

| Article Code | Fastener Size | Overall Length (mm) (Dimension C) | Drive End (mm) (Dimension A) | Wrench End (mm) (Dimension B) | |
|--------------|---------------|--------------------------------------|---------------------------------|----------------------------------|---|
| SC34403T | 10.0 mm | 82.0 | 21.8 | 15.3 | 6 |
| SC34404T | 11.0 mm | 82.0 | 21.8 | 16.5 | 6 |
| SC34405T | 12.0 mm | 82.0 | 21.8 | 17.8 | 6 |
| SC34406T | 13.0 mm | 82.0 | 23.8 | 19.0 | 6 |
| SC34407T | 14.0 mm | 82.0 | 23.8 | 20.3 | 6 |
| SC34408T | 15.0 mm | 82.0 | 23.8 | 21.5 | 6 |
| SC34409T | 16.0 mm | 82.0 | 23.8 | 22.8 | 6 |
| SC34410T | 17.0 mm | 82.0 | 23.8 | 23.2 | 6 |
| SC34411T | 18.0 mm | 82.0 | 24.8 | 24.6 | 6 |
| SC34412T | 19.0 mm | 82.0 | 25.8 | 27.2 | 4 |
| SC34414T | 21.0 mm | 82.0 | 27.8 | 28.4 | 4 |
| SC34415T | 22.0 mm | 82.0 | 29.5 | 30.0 | 4 |
| SC34417T | 24.0 mm | 82.0 | 31.8 | 30.0 | 4 |
| SC34419T | 26.0 mm | 82.0 | 34.8 | 30.0 | 4 |
| SC34420T | 27.0 mm | 82.0 | 35.8 | 30.0 | 4 |

3/4" Drive Impact Adapter


- Pin hole can be used with detent pin for secure socket retention to the adapter
- For use with impact drivers
- Black oxide finish to resist corrosion
- Chrome molybdenum alloy steel (Cr-Mo) for exceptional strength and durability
- Meets or exceeds ASME B107.110

| Article Code | Size |
|--------------|---------------|
| ST34718SC | 3/4"F X 1/2"M |
| ST34721SC | 3/4"F X 1"M |

IMPACT SOCKETS









| Length (mm) | |
|-------------|---|
| 56.0 | 6 |
| 57.0 | 4 |

3/4" Drive Impact Universal Joint

- Universal joint for better access to hard-to-reach fasteners
- Pin hole can be used with detent pin for secure socket retention to the adapter
- For use with impact drivers
- Black oxide finish to resist corrosion
- Chrome molybdenum alloy steel (Cr-Mo) for exceptional strength and durability
- Meets or exceeds ASME B107.110

| OSRTA 34720 (1999) | |
|------------------------------|--|

| Article Code | Length (mm) | |
|--------------|-------------|---|
| ST34720SC | 88.5 | 6 |

3/4" Drive Impact Extension

- Extension for better reach to more fasteners
- For use with impact drivers
- Ball detent for secure socket retention
- Black oxide finish to resist corrosion
- Chrome molybdenum alloy steel (Cr-Mo) for exceptional strength and durability
- Meets or exceeds ASME B107.110



| Article Code | Size | Length (mm) | |
|--------------|------|-------------|---|
| ST34708SC | 4" | 100.0 | 3 |
| ST34712SC | 10" | 250.0 | 1 |

3/4" Drive 6 Point Impact Socket

- Single hex (6 pt.) fastener end design
- For use with impact drivers
- Off-corner loading design reduces fastener rounding
- Large markings offer easy size identification
- Black oxide finish to resist corrosion
- Chrome molybdenum alloy steel (Cr-Mo) for exceptional strength and durability



| Article Code | Fastener Size | Overall Length (mm) (Dimension C) | Drive End (mm) (Dimension A) | Wrench End (mm) (Dimension B) | \$ |
|--------------|---------------|--------------------------------------|---------------------------------|----------------------------------|-----------|
| ST34505SC | 17.0 mm | 51.0 | 30.0 | 38.0 | 6 |
| ST34506SC | 18.0 mm | 51.0 | 31.0 | 38.0 | 6 |
| ST34507SC | 19.0 mm | 51.0 | 32.0 | 38.0 | 6 |

| Article Code | Fastener Size | Overall Length (mm) (Dimension C) | Drive End (mm) (Dimension A) | Wrench End (mm) (Dimension B) | (|
|--------------|---------------|--------------------------------------|---------------------------------|----------------------------------|----------|
| ST34508SC | 20.0 mm | 51.0 | 33.0 | 38.0 | 6 |
| ST34509SC | 21.0 mm | 51.0 | 34.0 | 38.0 | 6 |
| ST34510SC | 22.0 mm | 51.0 | 35.0 | 38.0 | 6 |
| ST34511SC | 23.0 mm | 51.0 | 36.0 | 38.0 | 6 |
| ST34512SC | 24.0 mm | 51.0 | 38.0 | 38.0 | 6 |
| ST34513SC | 25.0 mm | 51.0 | 38.0 | 38.0 | 6 |
| ST34514SC | 26.0 mm | 51.0 | 38.0 | 38.0 | 6 |
| ST34515SC | 27.0 mm | 53.0 | 40.0 | 40.0 | 6 |
| ST34516SC | 28.0 mm | 53.0 | 40.0 | 40.0 | 6 |
| ST34517SC | 29.0 mm | 53.0 | 42.0 | 42.0 | 6 |
| ST34518SC | 30.0 mm | 53.0 | 44.0 | 44.0 | 6 |
| ST34519SC | 31.0 mm | 53.0 | 48.0 | 44.0 | 6 |
| ST34520SC | 32.0 mm | 57.0 | 48.0 | 44.0 | 6 |
| ST34521SC | 33.0 mm | 57.0 | 48.0 | 44.0 | 6 |
| ST34522SC | 34.0 mm | 57.0 | 51.0 | 44.0 | 6 |
| ST34523SC | 35.0 mm | 57.0 | 50.0 | 44.0 | 6 |
| ST34524SC | 36.0 mm | 57.0 | 52.0 | 44.0 | 6 |
| ST34525SC | 37.0 mm | 57.0 | 55.0 | 44.0 | 6 |
| ST34526SC | 38.0 mm | 57.0 | 56.0 | 44.0 | 6 |
| ST34527SC | 39.0 mm | 57.0 | 58.0 | 44.0 | 6 |
| ST34528SC | 40.0 mm | 57.0 | 59.0 | 44.0 | 6 |
| ST34529SC | 41.0 mm | 57.0 | 60.0 | 44.0 | 6 |
| ST34530 | 42.0 mm | 57.0 | 61.0 | 44.0 | 6 |
| ST33501BU | 3/4" | 51.0 | 32.0 | 38.0 | 6 |
| ST33502BU | 13/16″ | 51.0 | 34.0 | 38.0 | 6 |
| ST33503BU | 7/8″ | 51.0 | 35.0 | 38.0 | 6 |
| ST33504BU | 15/16″ | 51.0 | 38.0 | 38.0 | 6 |
| ST33505BU | 1" | 51.0 | 38.0 | 38.0 | 6 |
| ST33506BU | 1.1/16" | 53.0 | 40.0 | 40.0 | 6 |
| ST33507BU | 1.1/8" | 53.0 | 42.0 | 42.0 | 6 |
| ST33508BU | 1.3/16" | 53.0 | 44.0 | 44.0 | 6 |
| ST33509BU | 1.1/4" | 57.0 | 48.0 | 44.0 | 6 |
| ST33510BU | 1.5/16" | 57.0 | 48.0 | 44.0 | 6 |
| ST33511BU | 1.3/8" | 57.0 | 50.0 | 44.0 | 6 |
| ST33512BU | 1.7/16" | 57.0 | 52.0 | 44.0 | 6 |
| ST33513BU | 1.1/2" | 57.0 | 56.0 | 44.0 | 6 |
| ST33514BU | 1.9/16″ | 57.0 | 59.0 | 44.0 | 6 |
| ST33515BU | 1.5/8″ | 57.0 | 60.0 | 44.0 | 6 |

Continued on next page

IMPACT SOCKETS

3/4" Drive 6 Point Deep Impact Socket

- Single hex (6 pt.) fastener end design
- For use with impact drivers
- Off-corner loading design reduces fastener rounding
- Deep socket to reach more fasteners
- Large markings offer easy size identification
- Black oxide finish to resist corrosion
- Chrome molybdenum alloy steel (Cr-Mo) for exceptional strength and durability
- Meets or exceeds ASME B107.110




| Article Code | Fastener Size | Overall Length (mm) (Dimension C) | Drive End (mm) (Dimension A) | Wrench End (mm) (Dimension B) | 4 |
|--------------|---------------|--------------------------------------|---------------------------------|----------------------------------|---|
| ST34605SC | 17.0 mm | 90.0 | 30.0 | 44.0 | 1 |
| ST34606SC | 18.0 mm | 90.0 | 31.0 | 44.0 | 1 |
| ST34607SC | 19.0 mm | 90.0 | 33.0 | 44.0 | 1 |
| ST34608SC | 20.0 mm | 90.0 | 34.0 | 44.0 | 1 |
| ST34609SC | 21.0 mm | 90.0 | 35.0 | 44.0 | 1 |
| ST34610SC | 22.0 mm | 90.0 | 37.0 | 44.0 | 1 |
| ST34611SC | 23.0 mm | 90.0 | 38.0 | 44.0 | 1 |
| ST34612SC | 24.0 mm | 90.0 | 39.0 | 44.0 | 1 |
| ST34613SC | 25.0 mm | 90.0 | 40.0 | 44.0 | 1 |
| ST34614SC | 26.0 mm | 90.0 | 41.0 | 44.0 | 1 |
| ST34615SC | 27.0 mm | 90.0 | 43.0 | 44.0 | 1 |
| ST34616SC | 28.0 mm | 90.0 | 44.0 | 44.0 | 1 |
| ST34617SC | 29.0 mm | 90.0 | 45.0 | 44.0 | 1 |
| ST34618SC | 30.0 mm | 90.0 | 46.0 | 44.0 | 1 |
| ST34619SC | 31.0 mm | 90.0 | 48.0 | 44.0 | 1 |
| ST34620SC | 32.0 mm | 90.0 | 49.0 | 44.0 | 1 |
| ST34621SC | 33.0 mm | 90.0 | 51.0 | 44.0 | 1 |
| ST34622SC | 34.0 mm | 90.0 | 51.0 | 44.0 | 1 |
| ST34623SC | 35.0 mm | 90.0 | 53.0 | 44.0 | 1 |
| ST34624SC | 36.0 mm | 90.0 | 54.0 | 44.0 | 1 |
| ST34625SC | 37.0 mm | 90.0 | 55.0 | 44.0 | 1 |
| ST34626SC | 38.0 mm | 90.0 | 56.0 | 44.0 | 1 |
| ST34628SC | 40.0 mm | 90.0 | 59.0 | 44.0 | 1 |
| ST34629SC | 41.0 mm | 90.0 | 60.0 | 44.0 | 1 |
| SC34630 | 42.0 mm | 90.0 | 61.0 | 44.0 | 1 |
| SC34631 | 43.0 mm | 90.0 | 63.0 | 44.0 | 1 |
| ST34632 | 44.0 mm | 90.0 | 64.0 | 44.0 | 1 |
| SC34633 | 45.0 mm | 90.0 | 65.0 | 44.0 | 1 |
| SC34634 | 46.0 mm | 90.0 | 66.0 | 44.0 | 1 |
| SC34635 | 47.0 mm | 90.0 | 68.0 | 44.0 | 1 |
| SC34636 | 48.0 mm | 90.0 | 69.0 | 44.0 | 1 |
| SC34637 | 49.0 mm | 90.0 | 70.0 | 44.0 | 1 |
| SC34638 | 50.0 mm | 90.0 | 71.0 | 54.0 | 1 |
| SC34640 | 55.0 mm | 90.0 | 78.0 | 54.0 | 1 |

1" Drive 6 Point Impact Socket

- Single hex (6 pt.) fastener end design
- For use with impact drivers
- Off-corner loading design reduces fastener rounding
- Large markings offer easy size identification
- Black oxide finish to resist corrosion
- Chrome molybdenum alloy steel (Cr-Mo) for exceptional strength and durability
- Meets or exceeds ASME B107.110

| Article Code | Fastener Size | Overall Length (mm) (Dimension C) | Drive End (mm) (Dimension A) | Wrench End (mm) (Dimension B) | (|
|--------------|---------------|--------------------------------------|---------------------------------|----------------------------------|----------|
| ST34824SC | 36.0 mm | 66.0 | 54.0 | 56.5 | 4 |
| ST34825SC | 37.0 mm | 66.0 | 54.0 | 58.0 | 4 |
| ST34826SC | 38.0 mm | 66.0 | 54.0 | 59.0 | 4 |
| ST34827SC | 39.0 mm | 66.0 | 54.0 | 60.0 | 4 |
| ST34828SC | 40.0 mm | 66.0 | 54.0 | 61.0 | 4 |
| ST34829SC | 41.0 mm | 68.0 | 54.0 | 62.5 | 4 |
| ST34830SC | 42.0 mm | 68.0 | 54.0 | 64.0 | 4 |
| ST34831SC | 43.0 mm | 70.0 | 54.0 | 65.0 | 4 |
| ST34832SC | 44.0 mm | 70.0 | 54.0 | 66.0 | 4 |
| ST34833SC | 45.0 mm | 70.0 | 54.0 | 67.5 | 4 |
| ST34834SC | 46.0 mm | 72.0 | 54.0 | 69.0 | 4 |
| ST34835SC | 47.0 mm | 72.0 | 54.0 | 70.0 | 4 |
| ST34836SC | 48.0 mm | 76.0 | 54.0 | 71.5 | 4 |
| ST34837SC | 49.0 mm | 76.0 | 54.0 | 73.0 | 4 |
| ST34838SC | 50.0 mm | 76.0 | 54.0 | 74.0 | 4 |
| ST34839SC | 51.0 mm | 76.0 | 54.0 | 75.0 | 2 |
| ST34840SC | 52.0 mm | 80.0 | 54.0 | 76.5 | 2 |
| ST34841SC | 53.0 mm | 80.0 | 54.0 | 78.0 | 2 |
| ST34842SC | 54.0 mm | 80.0 | 54.0 | 79.0 | 2 |
| ST34843SC | 55.0 mm | 84.0 | 54.0 | 80.0 | 2 |
| ST34844SC | 56.0 mm | 84.0 | 54.0 | 81.5 | 2 |
| ST34845SC | 57.0 mm | 84.0 | 54.0 | 82.5 | 2 |
| ST34846SC | 58.0 mm | 84.0 | 54.0 | 84.0 | 1 |
| ST34847SC | 59.0 mm | 88.0 | 54.0 | 85.0 | 1 |
| ST34848SC | 60.0 mm | 88.0 | 54.0 | 86.5 | 1 |
| ST34849SC | 63.0 mm | 88.0 | 54.0 | 90.0 | 1 |
| ST34850SC | 65.0 mm | 92.0 | 54.0 | 92.5 | 1 |
| ST34851SC | 67.0 mm | 92.0 | 54.0 | 95.0 | 1 |
| ST34852SC | 68.0 mm | 96.0 | 54.0 | 96.5 | 1 |
| ST34853SC | 69.0 mm | 96.0 | 54.0 | 98.0 | 1 |
| ST33801BU | 1.7/16″ | 66.0 | 54.0 | 56.5 | 4 |
| ST33802BU | 1.1/2" | 66.0 | 54.0 | 59.0 | 4 |
| ST33803BU | 1.9/16″ | 66.0 | 54.0 | 61.0 | 4 |

IMPACT SOCKETS





06

Continued on next page

06 Impact Sockets

Continued from previous page

| Article Code | Fastener Size | Overall Length (mm) (Dimension C) | Drive End (mm) (Dimension A) | Wrench End (mm) (Dimension B) | \$ |
|--------------|---------------|--------------------------------------|---------------------------------|----------------------------------|-----------|
| ST33804BU | 1.5/8″ | 68.0 | 54.0 | 62.5 | 4 |
| ST33805BU | 1.11/16" | 70.0 | 54.0 | 65.0 | 4 |
| ST33806BU | 1.3/4" | 70.0 | 60.3 | 67.5 | 4 |
| ST33807BU | 1.13/16″ | 72.0 | 60.3 | 69.0 | 4 |
| ST33808BU | 1.7/8″ | 72.0 | 60.3 | 70.0 | 4 |
| ST33809BU | 1.15/16″ | 76.0 | 60.3 | 72.5 | 4 |
| ST33810BU | 2" | 76.0 | 60.3 | 74.0 | 2 |
| ST33811BU | 2.1/16" | 80.0 | 60.3 | 76.5 | 2 |
| ST33812BU | 2.1/8" | 80.0 | 60.3 | 79.0 | 2 |
| ST33813BU | 2.3/16" | 84.0 | 60.3 | 80.0 | 2 |
| ST33814BU | 2.1/4" | 84.0 | 60.3 | 82.5 | 1 |
| ST33815BU | 2.5/16" | 84.0 | 60.3 | 84.0 | 1 |
| ST33816BU | 2.3/8" | 84.0 | 60.3 | 86.5 | 1 |
| ST33817BU | 2.7/16" | 88.0 | 60.3 | 89.0 | 1 |
| ST33818BU | 2.1/2" | 88.0 | 60.3 | 91.5 | 1 |
| ST33819BU | 2.9/16" | 92.0 | 60.3 | 92.5 | 1 |
| ST33820BU | 2.5/8″ | 92.0 | 60.3 | 95.0 | 1 |
| ST33821BU | 2.11/16" | 96.0 | 60.3 | 96.5 | 1 |
| ST33822BU | 2.3/4" | 96.0 | 60.3 | 99.0 | 1 |

1" Drive 6 Point Deep Impact Socket

- Single hex (6 pt.) fastener end design
- For use with impact drivers
- Off-corner loading design reduces fastener rounding
- Deep socket to reach more fasteners
- Large markings offer easy size identification
- Black oxide finish to resist corrosion
- Chrome molybdenum alloy steel (Cr-Mo) for exceptional strength and durability
- Meets or exceeds ASME B107.110

| Article Code | Fastener Size | Overall Length (mm) (Dimension C) | Drive End (mm) (Dimension A) | Wrench End (mm) (Dimension B) | (|
|--------------|---------------|--------------------------------------|---------------------------------|----------------------------------|----------|
| ST34924SC | 36.0 mm | 90.0 | 57.0 | 54.0 | 1 |
| ST34925SC | 37.0 mm | 90.0 | 58.0 | 54.0 | 1 |
| ST34926SC | 38.0 mm | 90.0 | 59.0 | 54.0 | 1 |
| ST34928SC | 40.0 mm | 90.0 | 62.0 | 54.0 | 1 |
| ST34929SC | 41.0 mm | 90.0 | 63.0 | 54.0 | 1 |
| ST34930SC | 42.0 mm | 90.0 | 64.0 | 54.0 | 1 |
| ST34931SC | 43.0 mm | 90.0 | 66.0 | 54.0 | 1 |
| ST34934SC | 46.0 mm | 100.0 | 69.0 | 54.0 | 1 |
| ST34937SC | 49.0 mm | 100.0 | 73.0 | 54.0 | 1 |
| ST34938SC | 50.0 mm | 100.0 | 74.0 | 54.0 | 1 |
| ST34940SC | 55.0 mm | 100.0 | 81.0 | 54.0 | 1 |







6 Pc. Metric Combination Wrench Set 7 Pc. Metric Combination Wrench Set

| Article Code | Content | | Article Code | Content | |
|--------------|--------------------------|---|--------------|------------------------------|---|
| ST09018SJ | 8, 10, 12, 13, 14, 15 mm | 3 | ST09030 | 8, 10, 12, 14, 17, 19, 21 mm | 4 |



7 Pc. Metric Combination Wrench Set 9 Pc. Metric Combination Wrench Set

| Article Code | Content | | Article Code | Content | |
|--------------|------------------------------|----|--------------|--------------------------------------|---|
| ST09070SJ | 8, 10, 12, 13, 14, 17, 19 mm | 12 | ST09020SJ | 8, 10, 11, 12, 13, 14, 15, 17, 19 mm | 3 |







2 PC. REVERSIBLE ST95410 ST95411 WRENCH RACK **UP TO 13 OR 16 WRENCHES**



Holds metric or

SAE wrenches



Adjustable

design



Reinforced

composite

construction





Self-aligning , drop-in feature Space-saving system

Fits up to 1" or 25 mm **METRIC** SAE


2 Pc. Reversible Wrench Rack

- Reversible wrench rack holds metric or SAE wrenches
- Adjustable design takes up 30% less space, allowing you to conveniently store your wrenches
- Reinforced composite construction offers long-lasting durability
- Self-aligning , drop-in feature provides quick and easy access to your tools
- Space-saving system for compact storage in shallow drawers
- Fits up to 1" or 25 mm

| Article Code | Description | |
|--------------|-----------------------|----|
| ST95410 | For up to 13 Wrenches | 24 |
| ST95411 | For up to 16 Wrenches | 18 |

| Article Code | Content | \$ | Article Code | Content | \$ |
|--------------|---|-----------|--------------|---|-----------|
| ST09064SJ | 8, 9, 10, 11, 12, 13, 14, 17, 19, 21, 24 mm | 12 | ST09022SJ | 8, 9, 10, 11, 12, 13, 14, 15, 17, 19, 22 mm | 2 |



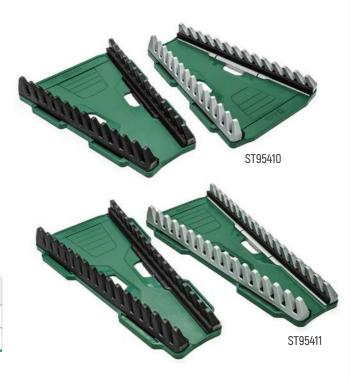

11 Pc. Metric Combination Wrench Set 11 Pc. Metric Combination Wrench Set



12 Pc. Metric Combination Wrench Set 12 Pc. Metric Combination Wrench Set

| Article Code | Content | | A |
|--------------|---|----|---|
| ST09063 | 6, 8, 10, 12, 13, 14, 17, 19, 22, 24, 30, 32 mm | 12 | S |

| Article Code | Content | |
|--------------|---|----|
| ST08001SJ | 6, 7, 8, 9, 10, 11, 12, 13, 14, 17, 19, 22 mm | 12 |





17 Pc. Metric Offset Combination 15 Pc. Metric Combination Wrench Set Wrench Set

| Article Code | Content | | Article Code | Content | |
|--------------|---|---|--------------|---|---|
| ST08002SJ | 6, 7, 8, 9, 10, 11, 13, 14, 17, 19, 22, 24, 27, 30, 32 mm | 4 | ST08018-02 | 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22 mm | 4 |



14 Pc. Metric Combination Wrench Set 14 Pc. Metric Combination Wrench Set

| Article Code | Content | | Article Code | Content | |
|--------------|---|---|--------------|---|---|
| ST09026SJ | 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 22, 24 mm | 3 | ST09062-02 | 10, 11, 12, 13, 14, 16, 17, 19, 21, 22, 24, 27, 30, 32 mm | 4 |





| Article Code | Content | | Article Code | Content | |
|--------------|---|---|--------------|---|---|
| ST09027SJ | 6, 7, 8, 9, 10, 11, 12, 13,14, 15, 16, 17,18, 19, 20, 21, 22, 23, 24, 25, 27, 30, 32 mm | 4 | ST09093 | 6, 7, 8, 9, 10, 11 ,12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 32 mm | 1 |



07



23 Pc. Metric Combination Wrench Set 26 Pc. Metric Combination Wrench Set



6 Pc. SAE Combination Wrench Set

| Article Code | Content | \$ |
|--------------|-----------------------------------|-----------|
| ST09017SJ | 5/16, 3/8, 7/16, 1/2, 9/16 , 5/8" | 3 |

| 9 Pc. SAE Combination Wr | ench Set |
|--------------------------|----------|
|--------------------------|----------|

| Article Code | Content | |
|--------------|---|---|
| ST09019SJ | 1/4, 5/16, 3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4" | 3 |





| Article Code | Content | | Article Code | Content | |
|--------------|---|---|--------------|--|---|
| ST09069SJ | 3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8, 15/16, 1, 1-1/16, 1-1/8, 1-1/4" | 4 | ST09074SJ | 1/4, 5/16, 3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8, 15/16, 1, 1-1/16, 1-1/8, 1-1/4″ | 4 |



11 Pc. SAE Combination Wrench Set

| Article Code | Content | | Article Code | Content |
|--------------|---|----|--------------|--|
| ST09068SJ | 3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8, 15/16, 1″ | 12 | ST09021SJ | 1/4, 5/16, 3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8″ |





11 Pc. SAE Combination Wrench Set



07

14 Pc. SAE Combination Wrench Set 16 Pc. SAE Combination Wrench Set



07 Wrenches

Combination Wrench

- Combination wrenches feature open end & box end
- Off-corner loading design on box end provides better grip and reduces fastener rounding
- Combination wrenches feature a 15° offset box end for added knuckle clearance
- Sleek head design enables access to tight spots where a ratchet will not fit
- High-visibility stamped markings provide quick size identification
- Chrome vanadium alloy steel (Cr-V) for exception strength and durability

Meets or exceeds ASME B107.100

Size

Article Code

| | 0 | • | • | | | | | | |
|---|-----------------------------------|-----------------|-----------------|-----------|--------------|---------|------------------|-----------------|-----------------|
| 1 | oy steel (Cr :y 4E B107.100 | | ceptional | | | L | B | | 21.5 100 |
| | Length L (mm) | Width A (mm) | Width B (mm) | \$ | Article Code | Size | Length L (mm) | Width A (mm) | Width B (mm) |
| | 127.0 | 13.0 | 11.4 | 6 | ST40245SC | 41.0 mm | 578.0 | 86.5 | 61.0 |
| | 127.0 | 13.0 | 11.4 | 6 | ST40246SC | 42.0 mm | 578.0 | 86.5 | 61.0 |
| | 133.0 | 14.4 | 12.3 | 6 | ST40248SC | 46.0 mm | 615.0 | 93.0 | 65.5 |
| | 140.0 | 16.5 | 13.6 | 6 | ST40249SC | 48.0 mm | 654.0 | 100.0 | 74.5 |
| | 149.0 | 18.5 | 15.0 | 6 | ST40250SC | 50.0 mm | 654.0 | 100.0 | 74.5 |
| | 159.0 | 20.5 | 16.0 | 6 | ST40251SC | 55.0 mm | 670.0 | 109.0 | 80.0 |
| | 165.0 | 22.5 | 17.5 | 6 | ST40252SC | 60.0 mm | 692.0 | 120.0 | 87.0 |
| | 171.0 | 25.0 | 18.5 | 6 | ST40101SC | 1/4″ | 127.0 | 13.0 | 11.4 |
| | 177.0 | 27.0 | 20.0 | 6 | ST40102SC | 5/16″ | 140.0 | 16.5 | 13.6 |
| | 190.0 | 19.0 | 21.5 | 6 | ST40103SC | 3/8″ | 159.0 | 20.5 | 16.0 |
| | 199.0 | 31.0 | 22.5 | 6 | ST40104SC | 7/16″ | 165.0 | 22.5 | 17.5 |
| | 208.0 | 33.0 | 24.0 | 6 | ST40105SC | 1/2" | 177.0 | 27.0 | 20.0 |

9/16"

5/8"

11/16"

3/4"

13/16"

7/8"

15/16"

1″

1-1/16"

1-1/8"

1-1/4"

1-5/16"

1-3/8"

1-7/16"

1-1/2"

1-5/8"

1-3/4"

1-7/8"

2″

190.0

208.0

225.0

248.0

271.0

293.0

316.0

335.0

359.0

402.0

426.0

476.0

476.0

501.0

501.0

578.0

578.0

615.0

654.0

29.0

33.0

35.0

29.0

43.0

45.3

49.0

51.0

55.0

65.5

66.6

71.0

71.0

79.0

79.0

86.5

86.5

93.0

100.0

2 2

2

2

2

2

2

6

6

6

6

6

6

6

6

6

4

4

4

4

4

2

2

2 2

2

2

2 2

2

2

21.5

24.0

26.0

28.0

31.0

32.0

34.0

37.5

39.0

42.6

46.0

50.0

50.0

55.5

55.5

61.0

61.0

65.5

74.5

7 Pc. Metric XL X-Beam Combination Wrench Set

| Article Code | Content | |
|--------------|------------------------------|---|
| ST08017 | 8, 10, 12, 13, 14, 17, 19 mm | 4 |



XL X-Beam Combination Wrench

- Combination wrenches feature open end & box end
- X-Beam[™] design lets you apply force to the flat side of the wrench, reducing hand fatigue and increasing tourque output by 25%
- Off-corner loading design on box end provides better grip and reduces fastener rounding
- Combination wrenches feature a 15° offset box end for added knuckle clearance
- Up to 25% longer for improved access and leverage
- Hand and wrench contact area increased 5 times when operating
- Sleek head design enables access to tight spots where a ratchet will not fit
- High-visibility stamped markings provide quick size identification
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.100


| Article Code | Size | Length L (mm) | Width A (mm) | Width B (mm) | \$ |
|--------------|---------|---------------|--------------|--------------|-----------|
| ST40281SC | 8.0 mm | 147.0 | 18.5 | 13.6 | 6 |
| ST40282SC | 9.0 mm | 158.0 | 20.5 | 15.0 | 6 |
| ST40283SC | 10.0 mm | 166.0 | 23.2 | 16.1 | 6 |
| ST40284SC | 11.0 mm | 185.0 | 25.5 | 17.4 | 6 |
| ST40285SC | 12.0 mm | 196.0 | 27.5 | 18.5 | 6 |
| ST40286SC | 13.0 mm | 206.0 | 28.5 | 19.8 | 6 |
| ST40287SC | 14.0 mm | 222.0 | 32.5 | 21.5 | 6 |
| ST40288SC | 15.0 mm | 232.0 | 33.5 | 22.6 | 6 |
| ST40289SC | 16.0 mm | 242.0 | 35.5 | 24.0 | 6 |
| ST40290SC | 17.0 mm | 260.0 | 38.5 | 26.0 | 6 |
| ST40291SC | 18.0 mm | 269.0 | 39.0 | 26.6 | 6 |
| ST40292SC | 19.0 mm | 278.7 | 42.5 | 28.0 | 6 |

| ST40233SC | 5.5 mm | 127.0 | 13.0 | 11.4 | 6 | ST40245SC |
|-----------|---------|-------|------|------|---|-----------|
| ST40201SC | 6.0 mm | 127.0 | 13.0 | 11.4 | 6 | ST40246SC |
| ST40202SC | 7.0 mm | 133.0 | 14.4 | 12.3 | 6 | ST40248SC |
| ST40203SC | 8.0 mm | 140.0 | 16.5 | 13.6 | 6 | ST40249SC |
| ST40204SC | 9.0 mm | 149.0 | 18.5 | 15.0 | 6 | ST40250SC |
| ST40205SC | 10.0 mm | 159.0 | 20.5 | 16.0 | 6 | ST40251SC |
| ST40206SC | 11.0 mm | 165.0 | 22.5 | 17.5 | 6 | ST40252SC |
| ST40207SC | 12.0 mm | 171.0 | 25.0 | 18.5 | 6 | ST40101SC |
| ST40208SC | 13.0 mm | 177.0 | 27.0 | 20.0 | 6 | ST40102SC |
| ST40209SC | 14.0 mm | 190.0 | 19.0 | 21.5 | 6 | ST40103SC |
| ST40210SC | 15.0 mm | 199.0 | 31.0 | 22.5 | 6 | ST40104SC |
| ST40211SC | 16.0 mm | 208.0 | 33.0 | 24.0 | 6 | ST40105SC |
| ST40212SC | 17.0 mm | 225.0 | 35.0 | 26.0 | 6 | ST40106SC |
| ST40213SC | 18.0 mm | 237.0 | 37.0 | 26.6 | 6 | ST40107SC |
| ST40214SC | 19.0 mm | 248.0 | 39.0 | 28.0 | 6 | ST40108SC |
| ST40215SC | 20.0 mm | 265.0 | 42.0 | 30.0 | 4 | ST40109SC |
| ST40216SC | 21.0 mm | 271.0 | 43.0 | 31.0 | 4 | ST40110SC |
| ST40217SC | 22.0 mm | 293.0 | 45.3 | 32.0 | 4 | ST40111SC |
| ST40218SC | 23.0 mm | 304.0 | 47.5 | 33.0 | 4 | ST40112SC |
| ST40219SC | 24.0 mm | 316.0 | 49.0 | 34.0 | 4 | ST40113SC |
| ST40220SC | 25.0 mm | 335.0 | 51.0 | 37.5 | 4 | ST40114SC |
| ST40235SC | 26.0 mm | 348.0 | 54.0 | 37.5 | 4 | ST40115SC |
| ST40221SC | 27.0 mm | 359.0 | 55.0 | 39.0 | 4 | ST40116SC |
| ST40236SC | 28.0 mm | 402.0 | 62.5 | 42.6 | 2 | ST40117SC |
| ST40237SC | 29.0 mm | 402.0 | 62.5 | 42.6 | 2 | ST40118SC |
| ST40222SC | 30.0 mm | 415.0 | 65.0 | 43.0 | 2 | ST40119SC |
| ST40223SC | 32.0 mm | 426.0 | 66.5 | 46.0 | 2 | ST40120SC |
| ST40241SC | 34.0 mm | 476.0 | 71.0 | 50.0 | 2 | ST40121SC |
| ST40242SC | 35.0 mm | 476.0 | 71.0 | 50.0 | 2 | ST40122SC |
| ST40243SC | 36.0 mm | 501.0 | 79.0 | 55.5 | 2 | ST40123SC |
| ST40244SC | 38.0 mm | 501.0 | 79.0 | 55.5 | 2 | ST40124SC |

10 Pc. Metric XL X-Beam Combination Wrench Set

| Article Code | Content | |
|--------------|--|---|
| ST08006SJ | 8, 10, 12, 13, 14, 15, 16, 17, 18, 19 mm | 4 |







7 Pc. Metric Double Open End Wrench Set

| Article Code | Content | | , |
|--------------|--|----|---|
| ST09073SJ | 6x7, 8x9, 10x11, 12x13, 14x15, 16x17, 19x21 mm | 12 | , |



7 Pc. Metric Double Open End Wrench Set

| Article Code | Content | |
|--------------|---|----|
| ST09071SJ | 8x10, 10x12, 12x14, 14x17, 17x19, 21x23, 22x24 mm | 12 |



10 Pc. Metric Double Open End Wrench Set

| Article Code | Content | | Article Code | Content | |
|--------------|---|---|--------------|---|---|
| ST08010 | 5.5x7, 8x10, 9x11, 10x12, 12x14, 14x17, 17x19, 19x22, 24x27, 30x32 mm | 2 | ST08019-02 | 6x7, 8x9, 10x11, 12x13, 14x15, 16x17, 18x19, 21x23, 24x27, 30x32 mm | 6 |



8 Pc. Metric Double Open End Wrench Set

| Article Code | Content | | |
|--------------|---|---|--|
| ST08013 | 6x7, 8x9, 10x11, 12x13, 14x15, 16x17, 18x19, 21x22 mm | 6 | |

| 8 Pc. | Metric | Double | Open End | |
|-------|---------|--------|----------|--|
| Wren | ich Set | | - | |

| | | Article Code | Content | |
|----------------------|---|--------------|---|----|
| x17, 18x19, 21x22 mm | 6 | ST08014SJ | 6x7, 8x9, 10x11, 12x13, 14x15, 16x17, 18x19, 20x22 mm | 12 |





11 Pc. Metric Double Open End Wrench Set

| Article Code Content | | | Article Code | Content | |
|----------------------|--|---|--------------|--|---|
| ST08041 | 6x7, 8x9, 10x11, 12x13, 14x15, 16x17, 18x19, 20x22, 21x23, 24x27, 30x32 mm | 6 | ST09029SJ | 6x7, 8x10, 10x12, 11x13, 12x14, 14x17, 17x19, 19x21, 21x23, 22x24, 23x26, 24x27, 30x32 mm | 4 |



10 Pc. Metric Double Open End Wrench Set



07

13 Pc. Metric Double Open End Wrench Set



130

07 Wrenches

Double Open End Wrench

- Double open end design with 2 sizes per wrench
- Sleek head design enables access to tight spots where a ratchet will not fit
- High-visibility stamped markings provide quick size identification
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.100

Size

5.5x7 mm

6x7 mm

8x9 mm

8x10 mm

9x11 mm

10x11 mm

10x12 mm

11x13 mm

12x13 mm

12x14 mm

13x15 mm 13x16 mm

14x15 mm

14x17 mm

16x17 mm

16x18 mm

17x19 mm

18x19 mm

19x21 mm

19x22 mm

254.0

Article Code

ST41216SC

ST41201SC

ST41301SC

ST41202SC

ST41217SC

ST41302SC

ST41203SC

ST41204SC

ST41303SC

ST41205SC

ST41218SC

ST41219SC

ST41304SC

ST41206SC

ST41305SC

ST41214SC

ST41207SC

ST41225ST

ST41208SC


ST41215SC

| | | | | | | | | - |
|------------------|-----------------|-----------------|-----------|--------------|--------------|------------------|-----------------|-----------------|
| Length L (mm) | Width A (mm) | Width B (mm) | \$ | Article Code | Size | Length L (mm) | Width A (mm) | Width B (mm) |
| 124.0 | 16.5 | 12.5 | 6 | ST41227ST | 20x22 mm | 254.0 | 45.3 | 42.0 |
| 124.0 | 16.5 | 12.5 | 6 | ST41226 | 21x22 mm | 254.0 | 46.0 | 43.8 |
| 137.0 | 18.8 | 16.7 | 6 | ST41209SC | 21x23 mm | 262.0 | 48.0 | 43.8 |
| 150.0 | 20.8 | 16.5 | 6 | ST41210SC | 22x24 mm | 285.0 | 50.0 | 46.0 |
| 150.0 | 23.0 | 20.8 | 6 | ST41211SC | 23x26 mm | 300.0 | 54.3 | 48.0 |
| 150.0 | 23.0 | 20.8 | 6 | ST41212SC | 24x27 mm | 300.0 | 54.3 | 48.0 |
| 163.0 | 25.0 | 20.8 | 6 | ST41220SC | 27x30 mm | 290.0 | 62.5 | 56.4 |
| 175.0 | 27.0 | 23.0 | 6 | ST41213SC | 30x32 mm | 310.0 | 66.8 | 62.0 |
| 163.0 | 27.2 | 24.6 | 6 | ST41221SC | 30x34 mm | 329.0 | 69.7 | 66.8 |
| 187.0 | 29.0 | 25.0 | 6 | ST41222SC | 32x34 mm | 329.0 | 69.7 | 66.8 |
| 182.0 | 33.4 | 27.0 | 6 | ST41223SC | 34x36 mm | 341.0 | 75.5 | 70.0 |
| 182.0 | 33.4 | 27.0 | 6 | ST41101SC | 1/4"x5/16" | 124.0 | 16.5 | 12.5 |
| 182.0 | 33.4 | 29.0 | 6 | ST41102SC | 3/8"x7/16" | 150.0 | 23.0 | 20.8 |
| 201.0 | 35.5 | 29.0 | 6 | ST41103SC | 1/2"x9/16" | 175.0 | 27.0 | 23.0 |
| 201.0 | 35.5 | 33.4 | 6 | ST41104SC | 5/8"x11/16" | 201.0 | 35.5 | 33.4 |
| 201.0 | 35.5 | 33.4 | 6 | ST41105SC | 11/16"x3/4" | 228.0 | 39.7 | 35.5 |
| 228.0 | 39.7 | 35.5 | 6 | ST41106SC | 13/16"x7/8" | 254.0 | 46.0 | 43.8 |
| 228.0 | 39.7 | 35.5 | 4 | ST41107SC | 15/16"x1" | 279.0 | 52.5 | 50.0 |
| 240.0 | 43.8 | 39.7 | 4 | ST41108SC | 1-1/8x1-1/4" | 310.0 | 66.8 | 62.0 |
| | | | | | | | | |

43.8

4

46.0

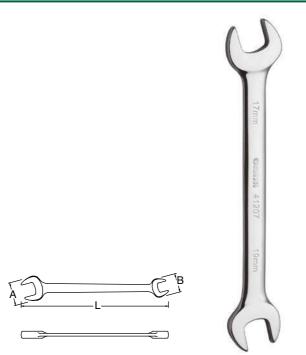

4

4

4

4

4

4

4

4

4

4

4

6

6

6

6

6

4

4

4

7 Pc. Metric Double Box End Wrench Set

| Article Code | Content | | Article Code | Content | |
|--------------|---|----|--------------|---|----|
| ST09072SJ | 8x10, 10x12, 12x14, 14x17, 17x19, 21x23, 22x24 mm | 12 | ST08004SJ | 6x7, 8x9, 10x11, 12x13, 14x15, 16x17, 17x19, 21x23 mm | 12 |



10 Pc. Metric Double Box End Wrench Set

| Article Code | Content | |
|--------------|---|---|
| ST08012 | 5.5x7, 8x10, 9x11, 10x12, 12x14, 14x17, 17x19, 19x22, 24x27, 30x32 mm | 6 |



8 Pc. Metric Double Box End Wrench Set



07

12 Pc. Metric Double Box End Wrench Set

| Article Code | Content | |
|--------------|--|---|
| ST08007SJ | 6x7, 8x9, 10x11, 12x13, 14x15, 16x17, 17x19, 19x22, 21x23, 22x24, 27x30, 30x32 mm | 4 |



07 Wrenches

Double Box End Wrench

- Double box end wrench design with 2 sizes per wrench
- 40° offset double box end design provides better access to recessed fasteners
- Off-corner loading design on box ends provide better grip and reduces fastener rounding
- Sleek head design enables access to tight spots where a ratchet will not fit
- High-visibility stamped markings provide quick size identification
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.100

| Article Code | Size | Length L (mm) | Width A (mm) | Width B (mm) | \$ | |
|--------------|----------|------------------|-----------------|-----------------|-----------|----|
| ST42221SC | 5.5x7 mm | 163.0 | 24.6 | 27.2 | 6 | Å |
| ST42213SC | 6x7 mm | 187.0 | 25.0 | 29.0 | 6 | |
| ST42214SC | 8x9 mm | 182.0 | 27.0 | 33.4 | 6 | |
| ST42201SC | 8x10 mm | 182.0 | 27.0 | 33.4 | 6 | |
| ST42222SC | 9x11 mm | 182.0 | 29.0 | 33.4 | 6 | |
| ST42215SC | 10x11 mm | 201.0 | 29.0 | 35.5 | 6 | |
| ST42202SC | 10x12 mm | 201.0 | 33.4 | 35.5 | 6 | Ar |
| ST42203SC | 11x13 mm | 201.0 | 33.4 | 35.5 | 6 | ST |
| ST42216SC | 12x13 mm | 228.0 | 35.5 | 39.7 | 6 | ST |
| ST42204SC | 12x14 mm | 228.0 | 35.5 | 39.7 | 6 | ST |
| ST42223SC | 13x15 mm | 240.0 | 39.7 | 43.8 | 6 | ST |
| ST42224SC | 13x16 mm | 254.0 | 43.8 | 46.0 | 6 | ST |
| ST42217SC | 14x15 mm | 254.0 | 42.0 | 45.3 | 6 | ST |
| ST42205SC | 14x17 mm | 254.0 | 43.8 | 46.0 | 6 | ST |
| ST42218SC | 16x17 mm | 262.0 | 43.8 | 48.0 | 6 | ST |
| ST42219SC | 16x18 mm | 285.0 | 46.0 | 50.0 | 6 | ST |
| ST42206SC | 17x19 mm | 300.0 | 48.0 | 54.3 | 6 | ST |
| ST42207SC | 19x21 mm | 300.0 | 48.0 | 54.3 | 4 | ST |
| ST42220SC | 19x22 mm | 290.0 | 56.4 | 62.5 | 4 | ST |

| A O | | | В |
|-----|------------|--------------|---|
| | <u>40°</u> | L <u>40°</u> | |

| Article Code | Size | Length L (mm) | Width A (mm) | Width B (mm) | (|
|--------------|------------|------------------|-----------------|-----------------|----------|
| ST42208SC | 21x23 mm | 310.0 | 62.0 | 66.8 | 4 |
| ST42209SC | 22x24 mm | 329.0 | 66.8 | 69.7 | 4 |
| ST42210SC | 23x26 mm | 329.0 | 66.8 | 69.7 | 4 |
| ST42211SC | 24x27 mm | 341.0 | 70.0 | 75.5 | 4 |
| ST42225SC | 27x30 mm | 124.0 | 12.5 | 16.5 | 4 |
| ST42212SC | 30x32 mm | 150.0 | 20.8 | 23.0 | 4 |
| ST42101SC | 3/8x7/16″ | 175.0 | 23.0 | 27.0 | 6 |
| ST42102SC | 1/2x9/16" | 201.0 | 33.4 | 35.5 | 6 |
| ST42104SC | 11/16x3/4" | 228.0 | 35.5 | 39.7 | 6 |
| ST42105SC | 13/16x7/8" | 254.0 | 43.8 | 46.0 | 4 |
| ST42106SC | 7/8x15/16" | 279.0 | 50.0 | 52.5 | 4 |
| ST42107SC | 15/16"x1" | 310.0 | 62.0 | 66.8 | 4 |

11 Pc. Metric Deep Offset Double Box End Wrench Set

| Article Code Content | | | | |
|----------------------|--|---|--|--|
| ST08023 | 6x7, 8x9, 10x11, 12x13, 14x15, 16x17, 18x19, 20x22, 21x23, 24x27, 30x32 mm | 6 | | |



Deep Offset Double Box End Wrench


- Double box end wrench design with 2 sizes per wrench
- 70° offset double box ends for better access to recessed fasteners
- Off-corner loading design on box ends provide better grip and reduces fastener rounding
- Sleek head design enables access to tight spots where a ratchet will not fit
- High-visibility stamped markings provide quick size identification
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.100

| Ą | C |
|---|---|
| | L |

| Article Code | Size | Length (mm) | Width (mm) | Hight (mm) | \$ |
|--------------|----------|-------------|------------|------------|-----------|
| ST42301 | 6x7 mm | 10.7 | 11.2 | 170.0 | 16 |
| ST42302 | 8x9 mm | 11.8 | 13.3 | 183.0 | 16 |
| ST42303 | 10x11 mm | 14.7 | 16.1 | 195.0 | 16 |
| ST42304 | 12x13 mm | 17.9 | 19.1 | 213.0 | 16 |
| ST42305 | 14x15 mm | 20.6 | 21.5 | 225.0 | 12 |
| ST42306 | 16x17 mm | 23.6 | 24.6 | 245.0 | 12 |
| ST42307 | 18x19 mm | 26.3 | 27.3 | 265.0 | 12 |
| ST42309 | 20x22 mm | 28.8 | 31.8 | 288.0 | 12 |
| ST42310 | 21x23 mm | 30.1 | 34.1 | 305.0 | 12 |
| ST42312 | 24x27 mm | 34.6 | 38.1 | 325.0 | 6 |
| ST42315 | 30x32 mm | 42.7 | 45.7 | 370.0 | 6 |

6 Pc. Metric Flex Head Socket & Open Wrench Set

| Article Code | Content | | | | G | |
|--------------|---------------|-------------|----|---|----------|--|
| ST09037SJ | 10, 12, 13, 1 | 4, 17, 19 m | im | | 6 | |
| | | | | | | |
| | | - | 12 | | | |
| | ۰ | • | • | ۰ | | |
| | | | | | | |
| | • | • | • | • | | |
| | | | | | | |
| | | | Ě | - | | |
| | 6 | | | | | |
| | | _ | | | | |
| | | r e | | | | |
| | | | | | | |

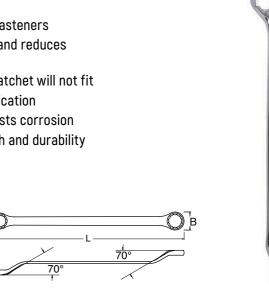


3 Pc. Metric Double Flex Head Socket Wrench Set

| Article Code | Content | | | | |
|--------------|-----------------------|---|--|--|--|
| ST08042 | 8x10, 12x14, 17x19 mm | 6 | | | |



Double Flex Head Socket Wrench

- Double box end wrench design with 2 sizes per wrench
- 12 pt. socket end pivots 180° for better access to hard-to-reach fasteners
- Off-corner loading design on box ends provide better grip and reduces fastener rounding
- High-visibility stamped markings provide quick size identification
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.100




| Article Code | Size | Length L (mm) | Width A (mm) | Width B (mm) | (| A |
|--------------|----------|------------------|-----------------|-----------------|----------|---|
| ST47501ST | 8x9 mm | 183.0 | 12.7 | 14.0 | 6 | S |
| ST47507ST | 8x10 mm | 189.0 | 13.7 | 14.8 | 6 | S |
| ST47502ST | 10x11 mm | 197.0 | 14.7 | 15.8 | 6 | S |
| ST47503ST | 12x13 mm | 211.0 | 16.2 | 17.4 | 6 | S |

| Article Code | Size | Length L (mm) | Width A (mm) | Width B (mm) | (|
|--------------|----------|------------------|-----------------|-----------------|----------|
| ST47504ST | 14x15 mm | 240.0 | 19.8 | 21.9 | 6 |
| ST47505ST | 16x17 mm | 256.0 | 23.9 | 24.0 | 6 |
| ST47509ST | 17x19 mm | 264.0 | 25.0 | 25.0 | 6 |
| ST47506ST | 18x19 mm | 272.0 | 26.9 | 27.0 | 6 |

Box End Slugging Wrench

- Stubby beam length for when clearance is limited
- Off-corner loading design provides better grip and reduces fastener rounding
- Sleek head design enables access to tight spots where a ratchet will not fit
- Hammer striking surface on end for more force when tightening or loosening fasteners
- · Features a safety through hole for connection to equipment via wire, string etc. in confined spaces
- High-visibility stamped markings provide quick size identification
- Heat treated for long lasting durability
- Meets or exceeds ASME B107.410

| Article Code | Size | Length L (mm) | Width A (mm) | \$ |
|--------------|---------|---------------|--------------|-----------|
| ST48505 | 27.0 mm | 175.0 | 45.0 | 4 |
| ST48506 | 30.0 mm | 185.0 | 50.0 | 4 |
| ST48507 | 32.0 mm | 195.0 | 55.0 | 4 |
| ST48509 | 36.0 mm | 200.0 | 55.0 | 4 |
| SC48512 | 41.0 mm | 222.0 | 62.0 | 4 |
| ST48515 | 46.0 mm | 240.0 | 75.0 | 4 |
| ST48516 | 50.0 mm | 245.0 | 75.0 | 3 |
| ST48517 | 55.0 mm | 265.0 | 85.0 | 2 |
| ST48519 | 60.0 mm | 270.0 | 90.0 | 2 |
| ST48520 | 65.0 mm | 270.0 | 90.0 | 2 |
| ST48521 | 70.0 mm | 320.0 | 105.0 | 2 |
| SC48522 | 75.0 mm | 330.0 | 110.0 | 1 |
| SC48523 | 80.0 mm | 359.0 | 131.0 | 1 |



| Article Code | Size | Length L (mm) | Width A (mm) | (|
|------------------|----------|---------------|--------------|----------|
| SC48524 | 85.0 mm | 359.0 | 131.0 | 1 |
| SC48525 | 90.0 mm | 391.0 | 145.0 | 1 |
| SC48526 | 95.0 mm | 391.0 | 145.0 | 1 |
| SC48527 | 100.0 mm | 421.0 | 158.0 | 1 |
| SC48528 | 105.0 mm | 421.0 | 158.0 | 1 |
| SC48529 | 110.0 mm | 450.0 | 172.0 | 1 |
| SC48530 115.0 mm | | 450.0 | 172.0 | 1 |
| SC48531 | 120.0 mm | 480.0 | 185.0 | 1 |

Open End Slugging Wrench

- Stubby beam length for when clearance is limited
- Sleek head design enables access to tight spots where a ratchet will not fit
- Hammer striking surface on end for more force when tightening or loosening fasteners
- Features a safety through hole for connection to equipment via wire, string, etc. in confined spaces
- High-visibility stamped markings provide quick size identification
- Heat treated for long lasting durability
- Meets or exceeds ASME B107.410


| Article Code | Size | Length L (mm) | Width A (mm) | | | | | 45610 | |
|--------------|---------|---------------|--------------|---|--------------|----------|---------------|--------------|---|
| SC48603 | 27.0 mm | 175.0 | 55.0 | 6 | | | | | |
| SC48604 | 30.0 mm | 185.0 | 60.0 | 6 | · | | | 0 | |
| SC48605 | 32.0 mm | 190.0 | 65.0 | 6 | L | L | el | | |
| SC48607 | 36.0 mm | 210.0 | 70.0 | 6 | | | | | |
| SC48609 | 41.0 mm | 230.0 | 85.0 | 6 | | | | | |
| SC48610 | 46.0 mm | 240.0 | 95.0 | 6 | Article Code | Size | Length L (mm) | Width A (mm) | |
| SC48611 | 50.0 mm | 270.0 | 100.0 | 6 | SC48617 | 80.0 mm | 408.0 | 173.0 | 1 |
| SC48612 | 55.0 mm | 295.0 | 115.0 | 6 | SC48618 | 85.0 mm | 408.0 | 173.0 | 1 |
| SC48613 | 60.0 mm | 310.0 | 120.0 | 3 | SC48619 | 90.0 mm | 445.0 | 193.0 | 1 |
| SC48614 | 65.0 mm | 330.0 | 145.0 | 3 | SC48620 | 95.0 mm | 445.0 | 193.0 | 1 |
| SC48615 | 70.0 mm | 365.0 | 150.0 | 3 | SC48621 | 100.0 mm | 485.0 | 214.0 | 1 |
| SC48616 | 75.0 mm | 390.0 | 156.0 | 1 | SC48622 | 105.0 mm | 485.0 | 214.0 | 1 |

7 Pc. Stubby Combination Wrench Set

| Article Code | Content | |
|--------------|-------------------------------|----|
| ST09033SJ | 10, 11, 12, 13, 14, 17, 19 mm | 12 |



WRENCHES










Stubby Combination Wrench

- Stubby beam length for when clearance is limited
- Combination wrenches feature open end & box end
- Off-corner loading design provides better grip and reduces fastener rounding
- Sleek head design enables access to tight spots where a ratchet will not fit
- High-visibility stamped markings provide quick size identification
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.100

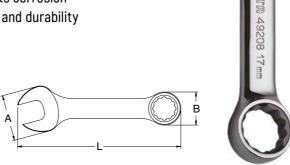

| Article Code | Size | Length L (mm) | Width A (mm) | Width B (mm) | (|
|--------------|---------|------------------|-----------------|-----------------|----------|
| SC49201 | 10.0 mm | 95.5 | 20.5 | 16.0 | 6 |
| ST49202BU | 11.0 mm | 103.0 | 22.6 | 17.5 | 6 |
| SC49203 | 12.0 mm | 106.5 | 24.6 | 18.5 | 6 |
| SC49204 | 13.0 mm | 108.5 | 26.7 | 20.0 | 6 |

| Article Code | Size | Length L (mm) | Width A (mm) | Width B (mm) | \$ |
|--------------|---------|------------------|-----------------|-----------------|-----------|
| SC49205 | 14.0 mm | 115.0 | 29.0 | 21.5 | 6 |
| SC49208 | 17.0 mm | 127.5 | 35.0 | 26.0 | 6 |
| SC49210 | 19.0 mm | 139.5 | 39.5 | 28.0 | 6 |

T-Handle 6 Point Socket Wrench

- T-Handle provides more leverage to break free stubborn fasteners
- Single hex (6 pt.) fastener end design
- 31 cm extension bar uniquely designed for working in a limited space
- 20 cm handle length ensures higher torque
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.110




3 Pc. Metric Flare Nut Wrench Set

3 Pc. Metric Flare Nut Wrench Set

| Article Code | Content | | Article Code | Content | \$ |
|--------------|-----------------------|---|--------------|-----------------------|-----------|
| ST09031SJ | 9x11, 13x14, 16x17 mm | 6 | ST09033U | 9x10, 11x12, 13x14 mm | 12 |



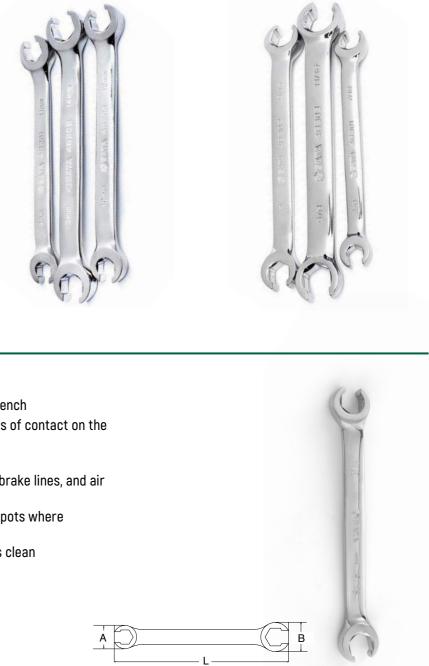

Flare Nut Wrench

- Flare nut wrench design with 2 sizes per wrench
- Flare nut hex shaped heads give more points of contact on the fastener to prevent damage
- Rugged one piece steel alloy construction
- Use for removing or replacing nuts on fuel, brake lines, and air conditioning lines
- Sleek head design enables access to tight spots where a ratchet will not fit
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Meets or exceeds ASME B107.100

| Article Code | Size | Length L (mm) | Width A (mm) | Width B (mm) | | Article Code | Size | Length L (mm) | Width A (mm) | Width B (mm) | \$ |
|--------------|----------|------------------|-----------------|-----------------|---|--------------|------------|------------------|-----------------|-----------------|-----------|
| ST48200SC | 8x10 mm | 140.0 | 17.3 | 21.0 | 6 | ST48203SC | 16x17 mm | 193.0 | 27.5 | 30.5 | 6 |
| ST48201SC | 9x11 mm | 152.0 | 19.4 | 22.2 | 6 | ST48301SC | 3/8x7/16″ | 152.0 | 19.4 | 22.2 | 6 |
| ST48204SC | 10x12 mm | 166.0 | 21.0 | 23.4 | 6 | ST48302SC | 1/2x9/16" | 178.0 | 24.9 | 26.1 | 6 |
| ST48202SC | 13x14 mm | 178.0 | 24.9 | 26.1 | 6 | ST48303SC | 5/8x11/16" | 193.0 | 27.5 | 30.5 | 6 |

| Article Code | Size | Length (mm) | | |
|--------------|---------|-------------|---|-------|
| ST47701SC | 8.0 mm | 310.0 | 6 | Artic |
| ST47702SC | 9.0 mm | 310.0 | 6 | ST477 |
| ST47703SC | 10.0 mm | 310.0 | 6 | ST477 |
| ST47704SC | 11.0 mm | 310.0 | 6 | ST477 |
| ST47705SC | 12.0 mm | 310.0 | 6 | ST477 |

| Article Code | Size | Length (mm) | \$ |
|--------------|---------|-------------|-----------|
| ST47706SC | 13.0 mm | 310.0 | 6 |
| ST47707SC | 14.0 mm | 310.0 | 6 |
| ST47710SC | 17.0 mm | 313.0 | 6 |
| ST47712SC | 19.0 mm | 313.0 | 6 |

WRENCHES

3 Pc. SAE Flare Nut Wrench Set

| Article Code | Content | |
|--------------|-------------------------------------|---|
| ST09032 | 3/8x7/16", 1/2x9/16", 5/8x11/16" | 6 |

4 Pc. E-Torx[®] Box Wrench Set

| Article Code | Content | |
|--------------|----------------------------------|---|
| ST09012SJ | E6xE8, E10xE12, E14xE18, E20xE24 | 6 |



VDE Insulated Open End Wrench

- VDE Certified
- For use in high voltage areas, up to 1000 V alternating current
- Sleek head design enables access to tight spots where a ratchet will not fit
- Red color for quick identification of VDE
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability

| Double Box E-Torx® Wrei | nch | | Ó | |
|--|------------------------|--------------|--------------|---|
| Double box end wrench design with 2 | 2 sizes per wrench | | | |
| Off-corner loading design on box enc and reduces fastener rounding | ls provide better grip | | 41 | |
| Torx wrenches feature a 15° offset b knuckle clearance | ox end for added | | 164 | |
| Sleek head design enables access to ratchet will not fit | tight spots where a | | | |
| High-visibility stamped markings pro identification | vide quick size | | | |
| Bright, full polish chrome finish easil resists corrosion | y wipes clean and | | In | |
| Chrome vanadium alloy steel (Cr-V) for exceptional strength and durabili | ty AO | В | 0 | |
| Meets or exceeds Camcar TXF-701 | | L | | |
| Article Code Size | Length L (mm) | Width A (mm) | Width B (mm) | C |

| Article Code | Size | Length L (mm) | Width A (mm) | Width B (mm) | |
|--------------|---------|---------------|--------------|--------------|---|
| ST45201SC | E6xE8 | 113.0 | 10.0 | 12.2 | 6 |
| ST45202SC | E10xE12 | 141.0 | 13.5 | 15.5 | 6 |
| ST45203SC | E14xE18 | 181.0 | 17.7 | 11.0 | 6 |
| ST45204SC | E20xE24 | 225.0 | 25.0 | 28.6 | 6 |


| Article Code | Size | Length L (mm) | Width B (mm) | Hight A (mm) | \$ |
|--------------|---------|---------------|--------------|--------------|-----------|
| ST41306SC | 6.0 mm | 90.0 | 23.0 | 7.0 | 6 |
| ST41307SC | 7.0 mm | 90.0 | 25.0 | 7.0 | 6 |
| ST41308SC | 8.0 mm | 100.0 | 27.0 | 7.5 | 6 |
| ST41309SC | 9.0 mm | 100.0 | 29.0 | 7.5 | 6 |
| ST41310SC | 10.0 mm | 110.0 | 31.0 | 8.0 | 6 |
| ST41311SC | 11.0 mm | 110.0 | 34.0 | 8.5 | 6 |
| ST41312SC | 12.0 mm | 130.0 | 36.0 | 8.5 | 6 |
| ST41313SC | 13.0 mm | 135.0 | 39.0 | 10.5 | 6 |
| ST41314SC | 14.0 mm | 145.0 | 40.0 | 10.5 | 6 |
| ST41315SC | 15.0 mm | 150.0 | 42.0 | 11.5 | 6 |
| ST41316SC | 16.0 mm | 160.0 | 43.0 | 11.5 | 6 |
| ST41317SC | 17.0 mm | 160.0 | 47.0 | 12.5 | 6 |
| ST41318SC | 18.0 mm | 175.0 | 50.0 | 13.0 | 6 |
| ST41319SC | 19.0 mm | 175.0 | 53.0 | 14.0 | 6 |
| ST41321SC | 21.0 mm | 195.0 | 55.0 | 14.0 | 6 |
| ST41322SC | 22.0 mm | 195.0 | 58.0 | 14.0 | 6 |
| ST41324SC | 24.0 mm | 225.0 | 62.0 | 16.5 | 6 |

WRENCHES



VDE Insulated Single Offset Ring Wrench

- VDE Certified
- For use in high voltage areas, up to 1000 V alternating current
- Off-corner loading design provides better grip and reduces fastener rounding
- Offset box end design provides better access to recessed fasteners
- Red color for quick identification of VDE
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability

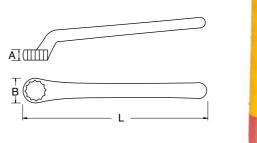

DE 1000V

| Article Code | Size | Length L (mm) | Width B (mm) | Hight A (mm) | |
|--------------|---------|---------------|--------------|--------------|---|
| ST42406SC | 6.0 mm | 150.0 | 16.0 | 5.5 | 6 |
| ST42407SC | 7.0 mm | 150.0 | 18.0 | 5.7 | 6 |
| ST42408SC | 8.0 mm | 155.0 | 19.0 | 6.1 | 6 |
| ST42409SC | 9.0 mm | 155.0 | 20.0 | 7.2 | 6 |
| ST42410SC | 10.0 mm | 170.0 | 21.0 | 7.3 | 6 |
| ST42411SC | 11.0 mm | 170.0 | 22.5 | 7.7 | 6 |
| ST42412SC | 12.0 mm | 190.0 | 23.0 | 7.7 | 6 |
| ST42413SC | 13.0 mm | 194.0 | 26.0 | 8.5 | 6 |
| ST42414SC | 14.0 mm | 205.0 | 28.0 | 9.5 | 6 |
| ST42415SC | 15.0 mm | 208.0 | 28.0 | 10.1 | 6 |
| ST42416SC | 16.0 mm | 220.0 | 30.0 | 10.5 | 6 |
| ST42417SC | 17.0 mm | 225.0 | 32.0 | 10.7 | 6 |
| ST42418SC | 18.0 mm | 230.0 | 33.0 | 11.5 | 6 |
| ST42419SC | 19.0 mm | 230.0 | 36.0 | 12.0 | 6 |
| ST42421SC | 21.0 mm | 235.0 | 37.0 | 12.0 | 6 |
| ST42422SC | 22.0 mm | 245.0 | 44.0 | 12.2 | 6 |
| ST42424SC | 24.0 mm | 265.0 | 44.0 | 13.0 | 6 |

VDE Insulated Adjustable Wrench

- VDE Certified
- For use in high voltage areas, up to 1000 V alternating current
- Hex jaw design reduces slippage and tightly grips bolt
- Larger knurl provides a tighter fit, is easier to adjust and is less likely to bind up
- Built-in scale measures metric sizes for quick fastener identification
- Cushion handle for ease of use and slip protection
- Tempered steel construction offers strength and durability for long-lasting performance


| Article Code | Size | Length L (mm) | Jaw Capacity C (mm) | Head Thickness A (mm) | \$ |
|--------------|------|---------------|---------------------|-----------------------|-----------|
| ST47101SC | 6" | 163.0 | 24.0 | 11.6 | 6 |
| ST47102SC | 8" | 215.0 | 28.2 | 11.7 | 6 |
| ST47103SC | 10" | 260.0 | 36.6 | 16.4 | 6 |
| ST47104SC | 12" | 312.0 | 38.0 | 20.4 | 6 |

11 Pc. X6 Pass-Thru Adjustable Wrench Set - Black Edition

| Article Code | Content | |
|--------------|--|---|
| ST09000 | 1 - 8" Adjustable Wrenche 3 in 1 10 - Sockets Vortex 10 mm (3/8"), 11 mm (7/16"), 12 mm (15/32"), 13 mm (1/2"), 14 mm (9/16"), 15 mm (19/32"), 16 mm (5/8"), 17 mm (11/16"), 18 mm (23/32"), 19 mm (3/4") | 6 |



WRENCHES

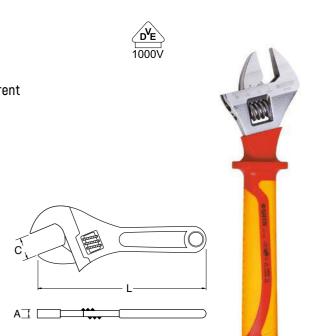



11 PC. X6 PASS-THRU ADJUSTABLE WRENCH SET -BLACK EDITION



Universal

socket style



system

Pass-Through



Standard and

deep socket combined



Flush mounted

reversing lever





Reversible lower jaw



wrench







- Wide jaw opening for greater capacity
- Wide handle for improved comfort and better leverage
- Hex jaw design reduces slippage and tightly grips bolt
- Larger knurl provides a tighter fit, is easier to adjust and is less likely to bind up
- Built-in scale measures metric sizes for quick fastener identification
- High-visibility stamped markings provide quick size identification
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.100

| Article Code | Size | Length L (mm) | Jaw Capacity C (mm) | Head Thickness A (mm) | |
|--------------|------|---------------|---------------------|-----------------------|---|
| ST47201SC | 4" | 100.0 | 12.7 | 9.4 | 6 |
| ST47202SC | 6" | 150.0 | 23.8 | 11.0 | 6 |
| ST47203SC | 8″ | 200.0 | 28.5 | 12.6 | 6 |
| ST47204SC | 10″ | 250.0 | 33.3 | 15.7 | 6 |
| ST47205SC | 12" | 300.0 | 38.1 | 19.0 | 4 |
| ST47206SC | 15″ | 375.0 | 42.8 | 23.9 | 3 |
| ST47207SC | 18″ | 450.0 | 52.4 | 28.5 | 1 |
| ST47208SC | 24" | 600.0 | 61.9 | 34.5 | 1 |

2 Pc. Wide Jaw 6" and 10" Adjustable Wrench Set

| Article Code | Content | |
|--------------|------------------------------------|----|
| ST47130 | Wide Jaw Adjustable Wrench 6", 10" | 12 |






ST09000

WRENCHES

07









Wide Jaw Adjustable Wrench

- Extra wide jaw opening for greater capacity
- Wide handle for improved comfort and better leverage
- Hex jaw design reduces slippage and tightly grips bolt
- Larger knurl provides a tighter fit, is easier to adjust and is less likely to bind up
- Built-in scale measures in both SAE standard and metric sizes for quick fastener identification
- High-visibility stamped markings provide quick size identification
- Black oxide finish to resist corrosion
- Meets or exceeds ASME B107.100



| Article Code | Size | Length L (mm) | Jaw Capacity C (mm) | Head Thickness A (mm) | |
|--------------|------|---------------|---------------------|-----------------------|---|
| ST47122 | 6" | 150.0 | 28.6 | 11.0 | 6 |
| ST47123 | 8" | 200.0 | 35.9 | 13.2 | 6 |
| ST47124 | 10″ | 250.0 | 39.0 | 15.5 | 6 |
| ST47125 | 12" | 300.0 | 43.0 | 19.0 | 4 |

Dipping Handle Adjustable Wrench


- Wide jaw opening for greater capacity
- Wide handle for improved comfort and better leverage
- Hex jaw design reduces slippage and tightly grips bolt
- Larger knurl provides a tighter fit, is easier to adjust and is less likely to bind up
- Built-in scale measures metric sizes for quick fastener identification
- Professional, ergonomic, oil resistant dipped grips wipe clean easily
- High-visibility size markings provide quick size identification
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.100



Heavy Duty Pipe Wrench

- Forged jaw, featuring easing spinning adjusting nut
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability

| Article Code | Size | Length (mm) | Jaw Capacity (mm) | Head Thickness (mm) | |
|--------------|------|-------------|-------------------|---------------------|---|
| ST70812ST | 8″ | 200.0 | 25.0 | 20.0 | 6 |
| ST70813ST | 10″ | 250.0 | 30.0 | 30.0 | 6 |
| ST70814ST | 12" | 300.0 | 40.0 | 30.0 | 6 |
| ST70815ST | 14" | 350.0 | 50.0 | 35.0 | 6 |
| ST70816ST | 18″ | 450.0 | 60.0 | 38.0 | 3 |
| ST70817ST | 24" | 600.0 | 75.0 | 40.0 | 2 |
| ST70818ST | 36″ | 900.0 | 85.0 | 55.0 | 1 |
| ST70819ST | 48" | 1200.0 | 110.0 | 70.0 | 1 |

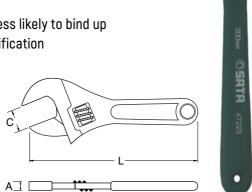



Ratcheting Wrenches

3 Pc. Metric Double Ratcheting Wrench Set

| Art | ticle Code | Content | | Article Code | Content | |
|-----|------------|---------------|----|--------------|-----------------------|----|
| STO | 09075 | 10, 13, 17 mm | 10 | ST09078SJ | 10, 11, 12, 13, 14 mm | 12 |



7 Pc. Metric Double Ratcheting Wrench Set

| Article Code | Content | | Article Code | Content | |
|--------------|------------------------------|---|--------------|----------------------------------|---|
| ST09024SJ | 8, 10, 12, 13, 14, 15, 18 mm | 6 | ST08007ASJ | 8, 10, 12, 13, 14, 15, 17, 19 mm | 3 |



5 Pc. Metric Combination Ratcheting Wrench Set



comes in a tool roll

8 Pc. Metric Double Ratcheting Wrench Set



12 PC. METRIC DOUBLE ST09066-02 **RATCHETING WRENCH SET**









5°

5° ratcheting arc versus 30°



Wrench Set

ST09079SJ

Article Code Content



8 Pc. Metric Double Ratcheting

8, 10, 11, 12, 13, 14, 17, 19 mm

7 Pc. SAE Double **Ratcheting Wrench Set**

| Article Code | Content | |
|--------------|---------------------------------------|---|
| ST08020 | 5/16, 3/8, 7/16, 1/2, 9/16, 5/8, 3/4" | 6 |



Ratcheting func- Needs as little tion on open end as 5° to remove and box end fasteners

to tight spots

Head design Open end quickly enables access ratchet

Off-Corner loading design

METRIC





12 Pc. Metric Double **Ratcheting Wrench Set**

5

| Article Code | Content | |
|--------------|---|---|
| ST09066-02 | 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19 mm | 2 |



08 Ratcheting Wrenches

Double Ratcheting Wrench

- Ratcheting function on open end and box end
- Ratcheting box end needs as little as 5° to remove fasteners
- Sleek head design enables access to tight spots where a ratchet will not fit
- Open end quickly ratchet nuts and bolts without removing the wrench from the fastener
- Off-corner loading design on ratcheting box ends provide better grip and reduces fastener rounding
- 5° ratcheting arc versus 30° on standard combination wrenches
- High-visibility stamped markings provide quick size identification
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.100


| Article Code | Size | Length L (mm) | Width A (mm) | Width B (mm) | (|
|--------------|---------|---------------|--------------|--------------|----------|
| ST43601 | 5.5 mm | 126.0 | 15.0 | 17.8 | 6 |
| ST43602 | 6.0 mm | 126.0 | 15.0 | 17.8 | 6 |
| ST43603 | 7.0 mm | 133.0 | 17.0 | 17.8 | 6 |
| ST43604 | 8.0 mm | 140.0 | 20.0 | 19.0 | 5 |
| ST43605 | 9.0 mm | 150.0 | 20.3 | 19.7 | 5 |
| ST43606 | 10.0 mm | 159.0 | 22.5 | 21.4 | 5 |
| ST43607 | 11.0 mm | 165.5 | 25.0 | 23.0 | 5 |
| ST43608 | 12.0 mm | 172.0 | 27.4 | 24.5 | 5 |
| ST43609 | 13.0 mm | 178.0 | 30.0 | 26.5 | 3 |
| ST43610 | 14.0 mm | 191.0 | 32.0 | 28.6 | 3 |
| ST43611 | 15.0 mm | 200.0 | 34.5 | 30.0 | 3 |
| ST43612 | 16.0 mm | 209.0 | 35.0 | 32.0 | 3 |
| ST43613 | 17.0 mm | 226.0 | 38.5 | 33.5 | 3 |
| ST43614 | 18.0 mm | 237.0 | 40.5 | 34.6 | 3 |
| ST43615 | 19.0 mm | 248.0 | 43.0 | 37.0 | 3 |
| ST43616 | 21.0 mm | 292.0 | 46.0 | 42.0 | 4 |
| ST43617 | 22.0 mm | 292.0 | 46.0 | 42.0 | 4 |
| ST43618 | 24.0 mm | 334.0 | 52.5 | 49.0 | 4 |
| ST43619 | 25.0 mm | 334.0 | 52.5 | 49.0 | 4 |
| ST43501 | 5/16″ | 140.0 | 20.0 | 19.0 | 5 |
| ST43502 | 3/8" | 159.0 | 22.5 | 21.4 | 5 |
| ST43503 | 7/16″ | 165.5 | 25.0 | 23.0 | 5 |
| ST43504 | 1/2" | 178.0 | 30.0 | 26.5 | 3 |
| ST43505 | 9/16″ | 191.0 | 32.0 | 28.6 | 3 |
| ST43506 | 5/8″ | 209.0 | 35.0 | 32.0 | 3 |
| ST43508 | 3/4" | 248.0 | 43.0 | 37.0 | 3 |
| ST43511 | 15/16″ | 334.0 | 52.2 | 49.0 | 4 |
| ST43512 | 1″ | 334.0 | 52.2 | 49.0 | 4 |

€

7 PC. METRIC X6 OPEN END ST47530 **RATCHETING COMBINATION WRENCH SET - BLACK EDITION**







Universal spline drive

Open end quickly ratchet









Off-Corner



High-Visibility stamped markings



Black oxide finish

METRIC



08 Ratcheting Wrenches

7 Pc. Metric X6 Open End Ratcheting Combination Wrench Set - Black Edition Ratcheting Wrench Set

| Article Code | Content | | Article Code | Content | |
|--------------|------------------------------|---|--------------|-------------------------------|---|
| ST47530 | 8, 10, 12, 13, 14, 15, 17 mm | 3 | ST09034 | 10, 12, 13, 14, 15, 17, 19 mm | 3 |





7 Pc. Metric Stubby Combination

7 Pc. Metric Combination Ratcheting Wrench Set

8 Pc. Metric Combination Ratcheting Wrench Set

6

| Article Code | Content | | Article Code | Content |
|--------------|------------------------------|---|--------------|-----------------------------------|
| ST09050SJ | 8, 10, 12, 14, 17, 19, 22 mm | 4 | ST09038SJ | 10, 11, 12, 13, 14, 15, 17, 19 mm |





8 Pc. Metric Combination Ratcheting Wrench Set

| Article Code | Content | | Article Code | Content | |
|--------------|----------------------------------|---|--------------|---|---|
| ST08008SJ | 8, 10, 12, 13, 14, 15, 17, 19 mm | 8 | ST09040-02 | 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19 mm | 4 |





12 Pc. Metric Combination Ratcheting Wrench Set



12 PC. METRIC ST08032 **COMBINATION RATCHETING WRENCH SET - BLACK EDITION**



Open end &

ratcheting

box end



Needs as little

as 5° to remove



Thin head and

beam



Off-Corner

loading design





High-visibility Black oxide finsih stamped markings

METRIC



ST08032

Article Code Content



8, 9, 10, 11, 1, 13, 14, 15, 1, 17, 18, 19 mm

7 Pc. SAE 120XP Combination **Ratcheting Wrench Set**

| Article Code | Content | \$ | Article Code | Content | \$ |
|--------------|---------------------------------------|-----------|--------------|---------------------------------------|-----------|
| ST08044U | 5/16, 3/8, 7/16, 1/2, 9/16, 5/8, 3/4" | 10 | ST09023SJ | 5/16, 3/8, 7/16, 1/2, 9/16, 5/8, 3/4" | 6 |







12 Pc. Metric Combination Ratcheting 7 Pc. Metric 120XP Combination Wrench Set - Black Edition **Ratcheting Wrench Set**

8

| Article Code | Content | |
|--------------|------------------------------|----|
| ST08043U | 8, 10, 12, 13, 14, 15, 18 mm | 10 |




08

7 Pc. SAE Combination Ratcheting Wrench Set



Combination Ratcheting Wrench

- Ratcheting Wrenches feature open end & ratcheting box end
- Ratcheting box end needs as little as 5° to remove fasteners
- Sleek head design enables access to tight spots where a ratchet will not fit
- Off-corner loading design on ratcheting box end provides better grip and reduces fastener rounding
- High-visibility stamped markings provide quick size identification
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.100



| Article Code | Size | Length L (mm) | Width A (mm) | Width B (mm) | (|
|--------------|---------|---------------|--------------|--------------|----------|
| ST43103ST | 7/16″ | 165.5 | 25.0 | 23.0 | 6 |
| ST43104ST | 1/2" | 178.0 | 30.0 | 26.5 | 6 |
| ST43105ST | 9/16″ | 191.0 | 32.0 | 28.6 | 6 |
| ST43106ST | 5/8" | 209.0 | 35.0 | 32.0 | 6 |
| ST43107ST | 11/16" | 226.0 | 38.5 | 33.5 | 6 |
| ST43108ST | 3/4" | 248.0 | 43.0 | 37.0 | 6 |
| ST43109ST | 13/16″ | 292.0 | 46.0 | 42.0 | 4 |
| ST43110ST | 7/8" | 292.0 | 46.0 | 42.0 | 4 |
| ST43111ST | 15/16″ | 334.0 | 52.2 | 49.0 | 4 |
| ST43112ST | 1″ | 334.0 | 52.2 | 49.0 | 4 |
| ST43113ST | 1-1/16″ | 359.0 | 56.4 | 52.5 | 4 |
| ST43114ST | 1-1/8" | 402.0 | 62.0 | 58.5 | 2 |
| ST43115ST | 1-1/4" | 426.0 | 65.6 | 62.0 | 2 |

| Article Code | Size | Length L (mm) | Width A (mm) | Width B (mm) | |
|--------------|---------|---------------|--------------|--------------|---|
| ST43220ST | 5.5 mm | 126.0 | 15.0 | 17.8 | 6 |
| ST43221ST | 6.0 mm | 126.0 | 15.0 | 17.8 | 6 |
| ST43222ST | 7.0 mm | 133.0 | 17.0 | 17.8 | 6 |
| ST43201ST | 8.0 mm | 140.0 | 20.0 | 19.0 | 6 |
| ST43202ST | 9.0 mm | 150.0 | 20.3 | 19.7 | 6 |
| ST43203ST | 10.0 mm | 159.0 | 22.5 | 21.4 | 6 |
| ST43204ST | 11.0 mm | 165.5 | 25.0 | 23.0 | 6 |
| ST43205ST | 12.0 mm | 172.0 | 27.4 | 24.5 | 6 |
| ST43206ST | 13.0 mm | 178.0 | 30.0 | 26.5 | 6 |
| ST43207ST | 14.0 mm | 191.0 | 32.0 | 28.6 | 6 |
| ST43208ST | 15.0 mm | 200.0 | 34.5 | 30.0 | 6 |
| ST43209ST | 16.0 mm | 209.0 | 35.0 | 32.0 | 6 |
| ST43210ST | 17.0 mm | 226.0 | 38.5 | 33.5 | 6 |
| ST43211ST | 18.0 mm | 237.0 | 40.5 | 34.6 | 6 |
| ST43212ST | 19.0 mm | 248.0 | 43.0 | 37.0 | 6 |
| ST43213ST | 21.0 mm | 292.0 | 46.0 | 42.0 | 4 |
| ST43214ST | 22.0 mm | 292.0 | 46.0 | 42.0 | 4 |
| ST43215ST | 24.0 mm | 334.0 | 52.5 | 49.0 | 4 |
| ST43216ST | 25.0 mm | 334.0 | 52.5 | 49.0 | 4 |
| ST43217ST | 27.0 mm | 359.0 | 56.4 | 52.5 | 4 |
| ST43218ST | 30.0 mm | 402.0 | 62.0 | 58.5 | 2 |
| ST43219ST | 32.0 mm | 426.0 | 65.6 | 62.0 | 2 |
| ST43101ST | 5/16″ | 140.0 | 20.0 | 19.0 | 6 |
| ST43102ST | 3/8" | 159.0 | 22.5 | 21.4 | 6 |

4 Pc. Metric Double Box Ratcheting Wrench Set

| Article Code | Content | | Article Code | Content | |
|--------------|------------------------------|---|--------------|---|---|
| ST46135U | 8x10, 12x13, 16x18, 17x19 mm | 6 | ST09025SJ | 8x9, 10x11, 12x13, 14x15, 16x18, 17x19 mm | 6 |




08

6 Pc. Metric Double Box Ratcheting Wrench Set



Double Box Ratcheting Wrench

- Double box end wrench design with 2 sizes per wrench
- Ratcheting box end needs as little as 5° to remove fasteners
- Sleek head design enables access to tight spots where a ratchet will not fit
- Off-corner loading design on ratcheting box ends provide better grip and reduces fastener rounding
- High-visibility stamped markings provide quick size identification
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.100

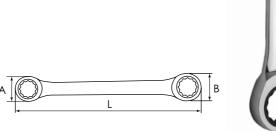

| Article Code | Size | Length L (mm) | Width A (mm) | Width B (mm) | \$ |
|--------------|----------|---------------|--------------|--------------|-----------|
| ST46201ST | 8x9 mm | 131.0 | 18.0 | 19.5 | 6 |
| ST46200ST | 8x10 mm | 131.0 | 18.5 | 21.8 | 6 |
| ST46202ST | 10x11 mm | 151.0 | 21.8 | 23.5 | 6 |
| ST46203ST | 12x13 mm | 171.0 | 25.0 | 26.5 | 6 |
| ST46204ST | 14x15 mm | 191.0 | 28.5 | 30.5 | 6 |
| ST46205ST | 16x18 mm | 211.0 | 32.5 | 35.5 | 6 |
| ST46206ST | 17x19 mm | 231.0 | 34.5 | 36.6 | 6 |

8 Pc. Metric XL X-Beam Ratcheting Wrench Set

| Article Code | Content | \$ | Art |
|--------------|----------------------------------|-----------|-----|
| ST08015SJ | 8, 10, 12, 13, 14, 15, 17, 19 mm | 4 | STO |

| 10 Pc. Metric XL X-Beam Ratcheting | |
|------------------------------------|--|
| Wrench Set | |

| Article Code | Content | |
|--------------|--|---|
| ST08016 | 8, 10, 12, 13, 14, 15, 16, 17, 18, 19 mm | 4 |





XL X-Beam[™] Ratcheting Wrench


- Ratcheting Wrenches feature open end & ratcheting box end
- Ratcheting box end needs as little as 5° to remove fasteners
- X-Beam[™] design lets you apply force to the flat side of the wrench, reducing hand fatigue and increasing tourque output by 25%
- Sleek head design enables access to tight spots where a ratchet will not fit
- Off-corner loading design on ratcheting box ends provide better grip and reduces fastener rounding
- High-visibility stamped markings provide quick size identification
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.100

| Article Code | Size | Length L (mm) | Width A (mm) | Width B (mm) | |
|--------------|---------|---------------|--------------|--------------|---|
| ST46301 | 8.0 mm | 151,0 | 20,0 | 18,5 | 6 |
| ST46302 | 9.0 mm | 165,0 | 20,3 | 19,6 | 6 |
| ST46303ST | 10.0 mm | 181,0 | 22,7 | 22,0 | 6 |
| ST46304ST | 11.0 mm | 196,0 | 25,0 | 24,0 | 6 |
| ST46305ST | 12.0 mm | 207,8 | 27,0 | 25,3 | 6 |
| ST46306ST | 13.0 mm | 220,8 | 29,0 | 27,4 | 6 |
| ST46307ST | 14.0 mm | 235,8 | 32,0 | 29,0 | 6 |
| ST46308ST | 15.0 mm | 250,0 | 34,0 | 31,3 | 6 |
| ST46309 | 16.0 mm | 261,0 | 35,0 | 33,3 | 6 |
| ST46310ST | 17.0 mm | 276,0 | 38,5 | 35,0 | 6 |
| ST46311 | 18.0 mm | 290,0 | 40,5 | 36,0 | 6 |
| ST46312ST | 19.0 mm | 306,0 | 42,0 | 37,0 | 6 |
| ST46322 | 3/8" | 181,0 | 22,7 | 22,0 | 6 |
| ST46323 | 7/16″ | 196,0 | 25,0 | 24,0 | 6 |
| ST46324 | 1/2" | 220,0 | 29,0 | 27,4 | 6 |
| ST46325 | 9/16″ | 235,0 | 32,0 | 29,0 | 6 |
| ST46326 | 5/8″ | 261,0 | 35,0 | 33,3 | 6 |
| ST46327 | 11/16″ | 276,0 | 38,5 | 35,0 | 6 |
| ST46328 | 3/4" | 306,0 | 42,0 | 37,0 | 6 |

nd rs wrench, reducing hand

atchet will not fit etter grip and reduces

cation sts corrosion h and durability





| ſ | | |
|---|---|---|
| | 9 | 2 |

5 Pc. Metric Reversible Ratcheting Wrench Set

| Article Code | Content | | Art |
|--------------|-----------------------|----|-----|
| ST09083SJ | 10, 11, 12, 13, 14 mm | 12 | STO |

| 6 Pc. Metric Reversible Ratcheting | |
|------------------------------------|--|
| Wrench Set | |

| Article Code | Content | |
|--------------|---------------------------|----|
| ST09080SJ | 10, 12, 13, 14, 17, 19 mm | 12 |





12 Pc. Metric Reversible Ratcheting Wrench Set

12 Pc. Metric Reversible Ratcheting Wrench Set - Black Edition


| Article Code | Content | | |
|--------------|---|---|--|
| ST08044 | 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19 mm | 8 | |

| I | Article Code | Content | |
|---|--------------|---|---|
| | ST08044B | 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19 mm | 8 |






12 PC. METRIC REVERSIBLE RATCHETING WRENCH SET - BLACK EDITION







Open end & ratcheting box end

fasteners

Needs as little Head design Off-Corner Flush mounted as 5° to remove enables access loading design reversing lever to tight spots





ST08044B








Black oxide finsih

METRIC



Reversible Ratcheting Wrench

- Ratcheting Wrenches feature open end & ratcheting box end
- Ratcheting box end needs as little as 5° to remove fasteners
- Sleek head design enables access to tight spots where a ratchet will not fit
- Off-corner loading design on ratcheting box ends provide better grip and reduces fastener rounding
- Flush mounted reversing lever allows user to change direction without removing the wrench
- High-visibility stamped markings provide quick size identification
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.100

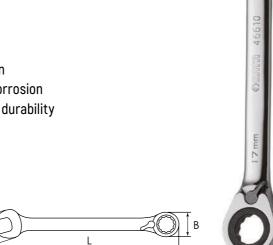

| Article Code | Size | Length L (mm) | Width A (mm) | Width B (mm) | |
|--------------|---------|---------------|--------------|--------------|---|
| ST46601ST | 8.0 mm | 140.0 | 20.0 | 18.0 | 6 |
| ST46602ST | 9.0 mm | 150.0 | 20.0 | 19.6 | 6 |
| ST46603ST | 10.0 mm | 159.0 | 22.5 | 21.6 | 6 |
| ST46604ST | 11.0 mm | 165.0 | 25.0 | 23.5 | 6 |
| ST46605ST | 12.0 mm | 172.0 | 27.0 | 25.0 | 6 |
| ST46606ST | 13.0 mm | 178.0 | 30.0 | 27.0 | 6 |
| ST46607ST | 14.0 mm | 191.0 | 32.0 | 28.5 | 6 |
| ST46608ST | 15.0 mm | 200.0 | 34.5 | 31.0 | 6 |
| ST46609ST | 16.0 mm | 208.0 | 35.0 | 33.0 | 6 |
| ST46610ST | 17.0 mm | 226.0 | 38.5 | 34.5 | 6 |
| ST46611ST | 18.0 mm | 236.0 | 41.0 | 36.0 | 6 |
| ST46612ST | 19.0 mm | 248.0 | 42.0 | 37.0 | 6 |
| ST46617 | 20.0 mm | 292.0 | 46.0 | 42.0 | 4 |
| ST46613 | 21.0 mm | 292.0 | 46.0 | 42.0 | 4 |
| ST46614 | 22.0 mm | 292.0 | 46.0 | 42.0 | 4 |
| ST46615 | 24.0 mm | 334.0 | 52.0 | 49.0 | 4 |
| ST46616 | 25.0 mm | 334.0 | 52.0 | 49.0 | 4 |
| ST46671BU | 5/16″ | 140.0 | 20.0 | 18.0 | 6 |
| ST46672BU | 11/32" | 150.0 | 20.0 | 19.6 | 6 |
| ST46673BU | 3/8" | 159.0 | 22.5 | 21.6 | 6 |
| ST46674BU | 7/16″ | 165.0 | 25.0 | 23.5 | 6 |
| ST46675BU | 1/2" | 178.0 | 30.0 | 27.0 | 6 |
| ST46676BU | 9/16" | 191.0 | 32.0 | 28.5 | 6 |

| Article Code | Size | Length L (mm) | Width A (mm) | Width B (mm) | |
|--------------|--------|---------------|--------------|--------------|---|
| ST46677BU | 5/8″ | 208.0 | 35.0 | 33.0 | 6 |
| ST46678BU | 11/16″ | 226.0 | 38.5 | 34.5 | 6 |
| ST46679BU | 3/4" | 248.0 | 42.0 | 37.0 | 4 |
| ST46680BU | 13/16″ | 292.0 | 46.0 | 42.0 | 4 |
| ST46681BU | 7/8″ | 292.0 | 46.0 | 42.0 | 4 |
| ST46682BU | 15/16″ | 334.0 | 52.0 | 49.0 | 4 |
| ST46683BU | 1″ | 334.0 | 52.0 | 49.0 | 4 |

5 Pc. Metric Flex Head Ratcheting Wrench Set

| Article Code | Content | | Article Code | Content | |
|--------------|-----------------------|----|--------------|---|---|
| ST09082SJ | 10, 11, 12, 13, 14 mm | 12 | ST08033 | 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19 mm | 8 |



Continued on next page

12 Pc. Metric Flex Head Ratcheting Wrench Set - Black Edition



12 PC. METRIC FLEX HEAD STOBO33 **RATCHETING WRENCH SET** - BLACK EDITION



Open end &

ratcheting

box end



Needs as little

fasteners

as 5° to remove



Head design

to tight spots



enables access ratcheting box

Flex head

end



Off-Corner

loading design



Black oxide finsih

METRIC








Flex Head Ratcheting Wrench

- Ratcheting Wrenches feature open end & ratcheting box end
- Ratcheting box end needs as little as 5° to remove fasteners
- Sleek head design enables access to tight spots where a ratchet will not fit
- Flex head ratcheting box end provides access for hard to reach angled fasteners
- Off-corner loading design on ratcheting box ends provide better grip and reduces fastener rounding
- High-visibility stamped markings provide quick size identification
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.100

| Article Code | Size | Length L (mm) | Width A (mm) | Width B (mm) | (|
|--------------|---------|---------------|--------------|--------------|----------|
| ST46421 | 8.0 mm | 144.0 | 20.0 | 18.5 | 6 |
| ST46422 | 9.0 mm | 152.0 | 20.0 | 20.0 | 6 |
| ST46401ST | 10.0 mm | 161.0 | 22.5 | 22.0 | 6 |
| ST46402ST | 11.0 mm | 168.0 | 25.0 | 24.0 | 6 |
| ST46403ST | 12.0 mm | 174.0 | 27.0 | 25.0 | 6 |
| ST46404ST | 13.0 mm | 181.0 | 30.0 | 27.4 | 6 |
| ST46405ST | 14.0 mm | 193.0 | 32.0 | 28.8 | 6 |
| ST46406ST | 15.0 mm | 202.0 | 34.5 | 30.8 | 6 |
| ST46407ST | 16.0 mm | 210.0 | 35.0 | 33.0 | 6 |
| ST46408ST | 17.0 mm | 227.0 | 38.5 | 35.0 | 6 |
| ST46409ST | 18.0 mm | 238.0 | 41.0 | 36.0 | 6 |
| ST46410ST | 19.0 mm | 249.0 | 42.0 | 36.9 | 6 |
| ST46412 | 21.0 mm | 292.0 | 46.0 | 42.0 | 4 |
| ST46413ST | 22.0 mm | 292.0 | 46.0 | 42.0 | 4 |
| ST46414 | 24.0 mm | 334.0 | 52.5 | 49.0 | 4 |
| ST46415 | 25.0 mm | 334.0 | 52.5 | 49.0 | 4 |
| ST46471BU | 5/16″ | 144.0 | 20.0 | 18.5 | 6 |
| ST46473BU | 7/16″ | 168.0 | 25.0 | 24.0 | 6 |
| ST46476BU | 5/8″ | 210.0 | 35.0 | 33.0 | 6 |
| ST46477BU | 11/16″ | 227.0 | 38.5 | 35.0 | 6 |
| ST46478BU | 3/4" | 249.0 | 42.0 | 36.9 | 6 |
| ST46479BU | 13/16″ | 292.0 | 46.0 | 42.0 | 4 |
| ST46480BU | 7/8" | 292.0 | 46.0 | 42.0 | 4 |
| ST46481BU | 15/16″ | 334.0 | 52.5 | 49.0 | 4 |
| ST46482BU | 1" | 334.0 | 52.5 | 49.0 | 4 |






7 Pc. Metric XL Locking Flex Head Ratcheting Wrench Set

| Article Code Content | | |
|----------------------|-------------------------------|---|
| ST09043SJ | 10, 12, 13, 14, 15, 17, 19 mm | 3 |



XL Locking Flex Head Ratcheting Wrench

- Ratcheting Wrenches feature open end & ratcheting box end
- Ratcheting box end needs as little as 5° to remove fasteners
- Sleek head design enables access to tight spots where a ratchet will not fit
- Flex head ratcheting box end provides access for hard to reach angled fasteners
- Off-corner loading design on ratcheting box ends provide better grip and reduces fastener rounding
- One finger operated lever with options of "locking" or "not locking" positions
- High-visibility stamped markings provide quick size identification
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.100



| Article Code | Size | Length L (mm) | Width A (mm) | Width B (mm) | \$ |
|--------------|---------|---------------|--------------|--------------|-----------|
| ST46801ST | 8.0 mm | 146.0 | 16.9 | 17.9 | 6 |
| ST46802ST | 9.0 mm | 159.0 | 18.8 | 19.6 | 6 |
| ST46803ST | 10.0 mm | 171.0 | 20.9 | 21.3 | 6 |
| ST46804ST | 11.0 mm | 183.0 | 23.1 | 23.0 | 6 |
| ST46805ST | 12.0 mm | 195.0 | 25.0 | 24.1 | 6 |
| ST46806ST | 13.0 mm | 207.0 | 27.1 | 26.2 | 6 |
| ST46807ST | 14.0 mm | 219.0 | 29.3 | 26.7 | 6 |
| ST46808ST | 15.0 mm | 231.0 | 31.2 | 29.9 | 6 |
| ST46809ST | 16.0 mm | 242.0 | 33.2 | 31.7 | 6 |
| ST46810ST | 17.0 mm | 254.0 | 35.5 | 32.2 | 6 |
| ST46811ST | 18.0 mm | 267.0 | 37.5 | 33.3 | 6 |


Continued on next page


| Article Code | Size | Length L (mm) | Width A (mm) | Width B (mm) | |
|--------------|---------|---------------|--------------|--------------|---|
| ST46812ST | 19.0 mm | 280.0 | 39.8 | 36.0 | 6 |
| ST46813ST | 20.0 mm | 297.0 | 45.9 | 42.0 | 6 |
| ST46814ST | 21.0 mm | 316.0 | 45.9 | 42.0 | 6 |
| ST46815ST | 22.0 mm | 335.0 | 48.4 | 42.0 | 6 |
| ST46816ST | 24.0 mm | 356.0 | 51.9 | 49.0 | 6 |
| ST46817ST | 25.0 mm | 378.0 | 53.9 | 49.0 | 6 |
| ST46902 | 11/32" | 159.0 | 18.8 | 19.6 | 6 |
| ST46904 | 7/16″ | 183.0 | 23.1 | 23.0 | 6 |
| ST46905 | 1/2" | 207.0 | 27.1 | 26.2 | 6 |
| ST46906 | 9/16″ | 219.0 | 29.3 | 26.7 | 6 |
| ST46909 | 3/4" | 280.0 | 39.8 | 36.0 | 6 |
| ST46911 | 7/8" | 335.0 | 48.4 | 42.0 | 6 |
| ST46912 | 15/16″ | 345.0 | 52.4 | 42.0 | 6 |

Construction Ratcheting Wrench

- Construction Ratcheting Wrench design with 2 sizes per wrench
- Designed with ratcheting function for increased speed and efficiency while fastening
- Tip end can be used to twist wire
- Composite function of socket and ratchet
- High-visibility stamped markings provide quick size identification
- Black oxide finish to resist corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.100

| Article Code | Size | Length L (mm) | Width A (mm) | \$ |
|--------------|----------|---------------|--------------|-----------|
| SC47305 | 12x14 mm | 225.0 | 31.0 | 2 |
| SC47308 | 14x17 mm | 270.0 | 35.0 | 2 |
| ST47309ST | 17x19 mm | 305.0 | 42.0 | 2 |
| SC47310 | 17x21 mm | 310.0 | 40.0 | 2 |
| SC47312 | 19x21 mm | 310.0 | 40.0 | 2 |
| SC47313 | 19x22 mm | 310.0 | 40.0 | 2 |
| SC47314 | 19x24 mm | 310.0 | 45.0 | 2 |
| SC47317 | 21x26 mm | 370.0 | 54.0 | 2 |
| SC47319 | 22x24 mm | 370.0 | 55.0 | 2 |
| SC47321 | 24x27 mm | 400.0 | 65.0 | 2 |
| SC47322 | 24x30 mm | 400.0 | 60.0 | 2 |
| SC47324 | 30x32 mm | 400.0 | 60.0 | 2 |
| SC47325 | 32x36 mm | 400.0 | 65.0 | 2 |

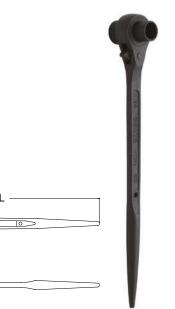



Ratcheting Adjustable Wrench 8"

- Adjustable wrench for versatility
- Ratcheting function increases speed when tightening and loosening fasteners
- Wide handle for improved comfort and better leverage
- Hex jaw design reduces slippage and tightly grips bolt
- Larger knurl provides a tighter fit, is easier to adjust and is less likely to bind up
- Built-in scale measures metric sizes for quick fastener identification
- Meets or exceeds ASME B107.100

Excluded from Lifetime Warranty terms



| Article Code | Size | Length L (mm) | Jaw Capacity (mm) | Head Thickness (mm) | |
|--------------|------|---------------|-------------------|---------------------|---|
| ST47403 | 8" | 215.2 | 25.0 | 14.5 | 6 |

3 Pc. Metric Drive Adapter Set

| Article Code | Content | |
|--------------|---|-----|
| ST09084SJ | 1/4" Dr. x 10 mm, 3/8" Dr. x 13 mm, 1/2" Dr. x 19 mm | 10^ |







1/4" Metric Ratcheting Wrench Socket Adapter Quick Release Function

- Converts a 10 mm box end ratcheting wrench into a 1/4" drive tool
- Pin hole can be used with detent pin for secure socket retention to the adapter
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strengt

| Article Code | Overal |
|--------------|--------|
| ST46654ST | |

3/8" Metric Ratcheting Wrench Socket with Quick Release Function

- Converts a 13 mm box end ratcheting wrench into a 3/8" dr
- Pin hole can be used with detent pin for secure socket rete
- Bright, full polish chrome finish easily wipes clean and resist
- Chrome vanadium alloy steel (Cr-V) for exceptional strengt

| Article Code | Overall |
|--------------|---------|
| ST46655ST | |

1/2" Metric Ratcheting Wrench Socket with Quick Release Function

- Converts a 19 mm box end ratcheting wrench into a 1/2" dri
- Pin hole can be used with detent pin for secure socket rete
- Bright, full polish chrome finish easily wipes clean and resist
- Chrome vanadium alloy steel (Cr-V) for exceptional strength

| Article Code | Overall |
|--------------|---------|
| ST46656ST | |

| th and durability | et al a a a a a a a a a a a a a a a a a a | | CHES |
|--|---|-----------|------|
| all Length (mm) | | | |
| 20.3 | | 10 | |
| et Adapter | | | |
| rive tool ention to the adapter ists corrosion th and durability | Los 19mm | | 08 |
| all Length (mm) | | | |
| 24.3 | | 10 | |
| t Adapter | | | |
| rive tool cention to the adapter ists corrosion th and durability | tor 19mm | | |
| all Length (mm) | | \$ | |
| 29.3 | | 10 | |

RATCHETING WRENCHES

Torque Wrenches

A-Series Mechanical Torque Wrench

- Teardrop, low-profile head and flush-mounted on/off switch allow better access in tight spaces
- High accuracy with deviation of +/- 3 % max.
- Knurled grip for comfort and control
- Flush mounted reversing lever allows user to change direction with one hand without removing the wrench
- Audible click and/or impulse when torque setting is reached
- Detent style locking collar prevents accidental change of torque setting
- Matt finish
- Tempered steel construction offers strength and durability for long-lasting performance
- High strength protective case
- Meets or exceeds ASME B107.300



| Article Code | Size | Overall Length (mm) | Primary Scale Range (Nm) | Max. Torque (Nm) | |
|--------------|------|---------------------|--------------------------|------------------|---|
| ST96211SC | 1/4" | 228.0 | 1.0 | 5.0 | 4 |
| ST96212SC | 3,8" | 268.0 | 5.0 | 25.0 | 4 |
| ST96311SC | 1/2" | 472.0 | 20.0 | 100.0 | 4 |
| ST96312SC | 1/2" | 555.0 | 40.0 | 200.0 | 2 |
| ST96313SC | 1/2" | 616.0 | 68.0 | 340.0 | 2 |
| ST96411SC | 3/4" | 864.0 | 110.0 | 550.0 | 1 |
| ST96412SC | 3/4" | 1107.0 | 160.0 | 800.0 | 1 |



Torque wrench is a precision instrument. Warranty conditions: SATA torque products are warrantee to (1) be free of defects in material and workmanship.

 (2) Accuracy standards for calibration are warrantee for 90 days from date of purchase. Products for which warranty repair is requested should be returned, at buyer's cost, to your nearest repair center.

SATA torque products are precision instru-ments that contain moving parts. These components are subject to normal wear through use, and replacement there of is the responsibility of the buyer. Torque products should be routinely checked for calibration at an authorized repair center using SATA repair parts.



This warranty shall not apply to products which have been misused, abused, damaged by accident or otherwise, repaired by anyone other than an authorized repair center or modified by anyone other than SATA tools.

¹⁰ Pliers & Crimping Tools





| Article Code | Content | |
|--------------|---|---|
| ST09261SJ | 1 - 8" VDE Insulated Linesman Pliers 1 - 6" VDE Insulated Diagonal Pliers 1 - 6" VDE Insulated Long Nose Pliers | 6 |



5 Pc. Pliers Set

| Article Code | Content | \$ |
|--------------|---|-----------|
| ST70001U | 2 - Tongue-and-Groove Pliers, 10", 12" 1 - Long Nose Pliers 8" 1 - Diagonal Pliers 7" 1 - Slip-Joint Pliers 6" | 5 |



3 Pc. Pliers Set

| Article Code | Cle Code Content 1002U 1 - 8" Universal Pliers 1 - 8" Long Nose Pliers 1 - 7" Diagonal Pliers | | | | |
|--------------|---|---|--|--|--|
| ST70002U | 1-8" Long Nose Pliers | 6 | | | |









Long Nose Pliers

- TPE two-tone anti-slip handle provides superior comfort and grip
- Serrated jaws for precision gripping in restricted areas
- Laser hardened cutting edges cut clean and remain sharp 50% longer
- Clear anti-rust coating prolongs tool life
- Manufactured from chrome-nickel steel for better strength and longer tool life
- Meets or exceeds ASME B107.500

| Article Code | Size | Overall Length (mm) | Jaw Thickness (mm) | Jaw Width (mm) | Overall Width (mm) | Cutting Capacity (mm) | (|
|--------------|------|------------------------|-----------------------|-------------------|-----------------------|---|----------|
| ST70101AST | 6″ | 165.0 | 10.0 | 20.0 | 57.0 | Copper Wire Ø 2.2, Iron Wire Ø 2.0, Hard Wire Ø 1.6 | 6 |
| ST70102AST | 8″ | 207.0 | 12.0 | 22.8 | 57.0 | Copper Wire Ø 2.6, Iron Wire Ø 2.4, Hard Wire Ø 2.0 | 6 |

High Leverage Long-Nose Pliers

- High leverage joint design provides greater cutting power while reducing effort to make cuts
- TPE two-tone anti-slip handle provides superior comfort and grip
- Serrated jaws for precision gripping in restricted areas
- Laser hardened cutting edges cut clean and remain sharp 50% longer
- Clear anti-rust coating prolongs tool life
- Manufactured from chrome-nickel steel for better strength and longer tool life
- Meets or exceeds ASME B107.500

| Article Code | Size | Overall Length (mm) | Jaw Thickness (mm) | Jaw Width (mm) | Overall Width (mm) | Cutting Capacity (mm) | \$ |
|--------------|------|------------------------|-----------------------|-------------------|-----------------------|---|-----------|
| ST72401 | 6″ | 164.4 | 10.0 | 20.0 | 57.6 | Copper Wire Ø 2.2, Iron Wire Ø 2.0, Hard Wire Ø 1.6 | 6 |

VDE Insulated Long Nose Pliers

DYE 1000V



- For use in high voltage areas, up to 1000 V alternating current
- Serrated jaws for precision gripping in restricted areas
- Induction hardened with angled teeth grip flat, curved, square or hexagonal objects
- Anti-slip handle provides superior comfort and grip
- Clear anti-rust coating prolongs tool life
- Heat treated for long lasting durability
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.13M

| Article Code | Size | Overall Length (mm) | Jaw Thickness (mm) | Jaw Width (mm) | Overall Width (mm) | Cutting Capacity (mm) | \$ |
|--------------|------|------------------------|-----------------------|-------------------|-----------------------|------------------------|-----------|
| ST70131ST | 6″ | 170.0 | 9.0 | 15.5 | 56.0 | Medium Hard Wire Ø 1.6 | 6 |
| ST70132ST | 8″ | 212.0 | 9.0 | 16.5 | 58.6 | Medium Hard Wire Ø 1.6 | 6 |

Diagonal Pliers

- TPE two-tone anti-slip handle provides superior comfort and grip
- Laser hardened cutting edges cut clean and remain sharp 50% longer
- Clear anti-rust coating prolongs tool life
- Manufactured from chrome-nickel steel for better strength and longer tool life
- Meets or exceeds ASME B107.500

| Article Code | Size | Overall Length (mm) | Jaw Thickness (mm) | Jaw Width (mm) | Overall Width (mm) | Cutting Capacity (mm) | (|
|--------------|------|------------------------|-----------------------|-------------------|-----------------------|---|----------|
| ST70201AST | 5″ | 131.0 | 9.8 | 17.0 | 54.0 | Copper Wire Ø 2.2, Iron Wire Ø 2.0, Hard Wire Ø 1.6 | 6 |
| ST70202AST | 6″ | 161.0 | 11.2 | 18.5 | 57.0 | Copper Wire Ø 2.6, Iron Wire Ø 24, Hard Wire Ø 2.0 | 6 |
| ST70203AST | 7" | 187.0 | 13.8 | 30.0 | 57.0 | Copper Wire Ø 2.6, Iron Wire Ø 2.4, Hard Wire Ø 2.0 | 6 |

High Leverage Diagonal Pliers

- High leverage joint design provides greater cutting power while reducing effort to make cuts
- TPE two-tone anti-slip handle provides superior comfort and grip
- Laser hardened cutting edges cut clean and remain sharp 50% longer
- Clear anti-rust coating prolongs tool life
- Manufactured from chrome-nickel steel for better strength and longer tool life
- Meets or exceeds ASME B107.500

| Article Code | Size | Overall Length (mm) | Jaw Thickness (mm) | Jaw Width (mm) | Overall Width (mm) | Cutting Capacity (mm) | (|
|--------------|------|------------------------|-----------------------|-------------------|-----------------------|---|----------|
| ST72302B-02 | 7″ | 190.0 | 13.8 | 30.0 | 60.0 | Copper Wire Ø 2.6, Iron Wire Ø 2.4, Hard Wire Ø 2.0 | 6 |

VDE Insulated Diagonal Pliers

- VDE Certified
- For use in high voltage areas, up to 1000 V alternating current
- Laser hardened cutting edges cut clean and remain sharp 50% longer
- Anti-slip handle provides superior comfort and grip
- Clear anti-rust coating prolongs tool life
- Heat treated for long lasting durability
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.11M

| Article Code | Size | Overall Length (mm) | Jaw Thickness (mm) | Jaw Width (mm) | Overall Width (mm) | Cutting Capacity (mm) | (|
|--------------|------|------------------------|-----------------------|-------------------|-----------------------|------------------------|----------|
| ST70232ST | 6″ | 170.0 | 11.5 | 21.0 | 59.0 | Medium Hard Wire Ø 1.6 | 6 |
| ST70233ST | 7" | 191.0 | 12.5 | 30.0 | 68.0 | Medium Hard Wire Ø 2.0 | 6 |





| Cutting Capacity (mm) | • |
|-----------------------|---|









ent 50% longer



Linesman Pliers

- TPE two-tone anti-slip handle provides superior comfort and grip
- Laser hardened cutting edges cut clean and remain sharp 50% longer
- Clear anti-rust coating prolongs tool life
- Manufactured from chrome-nickel steel for better strength and longer tool life
- Meets or exceeds ASME B107.500



| Article Code | Size | Overall Length (mm) | Jaw Thickness (mm) | Jaw Width (mm) | Overall Width (mm) | Cutting Capacity (mm) | |
|--------------|------|------------------------|-----------------------|-------------------|-----------------------|---|---|
| ST70301AST | 6″ | 154.0 | 10.0 | 23.5 | 52.0 | Copper Wire Ø 2.6, Iron Wire Ø 24, Hard Wire Ø 2.0 | 6 |
| ST70302AST | 7″ | 177.0 | 10.5 | 25.0 | 55.0 | Copper Wire Ø 2.6, Iron Wire Ø 24, Hard Wire Ø 2.0 | 6 |
| ST70303AST | 8″ | 208.0 | 11.5 | 28.5 | 55.0 | Copper Wire Ø 2.6, Iron Wire Ø 2.5, Hard Wire Ø 2.0 | 6 |

High Leverage Linesman Pliers

- High leverage joint design provides greater cutting power while reducing effort to make cuts
- TPE two-tone anti-slip handle provides superior comfort and grip
- Laser hardened cutting edges cut clean and remain sharp 50% longer
- Clear anti-rust coating prolongs tool life
- Manufactured from chrome-nickel steel for better strength and longer tool life
- Meets or exceeds ASME B107.500

VDE Certified

| Article Code | Size | Overall Length (mm) | Jaw Thickness (mm) | Jaw Width (mm) | Overall Width (mm) | \$ |
|--------------|------|------------------------|-----------------------|-------------------|-----------------------|-----------|
| ST72203AST | 8″ | 250.0 | 11.5 | 28.8 | 60.0 | 6 |

VDE Insulated Linesman Pliers

Anti-slip handle provides superior comfort and grip



or hexagonal objects

For use in high voltage areas, up to 1000 V alternating current

Induction hardened with angled teeth grip flat, curved, square

- Laser hardened cutting edges cut clean and remain sharp 50% longer
- Clear anti-rust coating prolongs tool life
- Heat treated for long lasting durability
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.20M

| Article Code | Size | Overall Length (mm) | Jaw Thickness (mm) | Jaw Width (mm) | Overall Width (mm) | Cutting Capacity (mm) | \$ |
|--------------|------|------------------------|-----------------------|-------------------|-----------------------|------------------------|-----------|
| ST70331ST | 6″ | 171.0 | 9.5 | 26.0 | 58.0 | Medium Hard Wire Ø 1.6 | 6 |
| ST70332ST | 7″ | 184.0 | 10.0 | 28.0 | 58.0 | Medium Hard Wire Ø 2.0 | 6 |
| ST70333ST | 8″ | 212.0 | 10.0 | 30.0 | 58.0 | Medium Hard Wire Ø 2.0 | 6 |

Mini Linesman Pliers

- TPE two-tone anti-slip handle provides superior comfort and grip
- Laser hardened cutting edges cut clean and remain sharp 50% longer
- Clear anti-rust coating prolongs tool life
- Manufactured from chrome-nickel steel for better strength and longer tool life
- Meets or exceeds ASME B107.500

| Article Code | Size | Overall Length (mm) | Jaw Thickness (mm) | Jaw Width (mm) | Overall Width (mm) | Cutting Capacity (mm) | (|
|--------------|------|------------------------|-----------------------|-------------------|-----------------------|---|----------|
| ST70611AST | 4" | 111.5 | 6.5 | 11.0 | 11.0 | Copper Wire Ø 1.5, Iron Wire Ø 1.3, Hard Wire Ø 1.0 | 6 |

Mini Long Nose Pliers

- TPE two-tone anti-slip handle provides superior comfort and grip
- Laser hardened cutting edges cut clean and remain sharp 50% longer
- Clear anti-rust coating prolongs tool life
- Manufactured from chrome-nickel steel for better strength and longer tool life
- Meets or exceeds ASME B107.500

| Article Code | Size | Overall Length (mm) | Jaw Thickness (mm) | Jaw Width (mm) | Overall Width (mm) | Cutting Capacity (mm) | |
|--------------|------|------------------------|-----------------------|-------------------|-----------------------|--|---|
| ST70612AST | 5″ | 123.5 | 6.5 | 11.0 | 11.0 | Copper Wire Ø 1.5, Iron Wire Ø 1.3, Medium Hard Wire Ø 1.0 | 6 |

Mini Bent Nose Pliers

- TPE two-tone anti-slip handle provides superior comfort and grip
- Laser hardened cutting edges cut clean and remain sharp 50% longer
- Clear anti-rust coating prolongs tool life
- Manufactured from chrome-nickel steel for better strength and longer tool life
- Meets or exceeds ASME B107.500

| Article Code | Size | Overall Length (mm) | Jaw Thickness (mm) | Jaw Width (mm) | Overall Width (mm) | Cutting Capacity (mm) | |
|--------------|------|------------------------|-----------------------|-------------------|-----------------------|---|---|
| ST70613AST | 5″ | 123.5 | 6.5 | 11.0 | 11.0 | Copper Wire Ø 1.5, Iron Wire Ø 1.3, Hard Wire Ø 1.0 | 6 |

| | 0 |
|------|-----|
| | |
| (NR | His |
| | |

| DE 000V | | |
|-------------------|--|--|
| | | |









Mini Flat Nose Pliers

- TPE two-tone anti-slip handle provides superior comfort and grip
- Laser hardened cutting edges cut clean and remain sharp 50% longer
- Clear anti-rust coating prolongs tool life
- Manufactured from chrome-nickel steel for better strength and longer tool life
- Meets or exceeds ASME B107.500



| Article Code | Size | Overall Length (mm) | Jaw Thickness (mm) | Jaw Width (mm) | Overall Width (mm) | Cutting Capacity (mm) | (|
|--------------|------|------------------------|-----------------------|-------------------|-----------------------|---|----------|
| ST70614AST | 5″ | 123.5 | 6.5 | 11.0 | 11.0 | Copper Wire Ø 1.5, Iron Wire Ø 1.3, Hard Wire Ø 1.0 | 6 |

Mini Diagonal Pliers

- TPE two-tone anti-slip handle provides superior comfort and grip
- Laser hardened cutting edges cut clean and remain sharp 50% longer
- Clear anti-rust coating prolongs tool life
- Manufactured from chrome-nickel steel for better strength and longer tool life
- Meets or exceeds ASME B107.500



| ŀ | Article Code | Size | Overall Length (mm) | Jaw Thickness (mm) | Jaw Width (mm) | Overall Width (mm) | Cutting Capacity (mm) | \$ |
|---|--------------|------|------------------------|-----------------------|-------------------|-----------------------|---|-----------|
| Ś | ST70615AST | 4″ | 110.5 | 6.5 | 11.0 | 11.0 | Copper Wire Ø 1.5, Iron Wire Ø 1.3, Hard Wire Ø 1.0 | 6 |

Mini End Cutting Pliers

- TPE two-tone anti-slip handle provides superior comfort and grip
- Laser hardened cutting edges cut clean and remain sharp 50% longer
- Clear anti-rust coating prolongs tool life
- Manufactured from chrome-nickel steel for better strength and longer tool life
- Meets or exceeds ASME B107.500



| Article Code | Size | Overall Length (mm) | Jaw Thickness (mm) | Jaw Width (mm) | Overall Width (mm) | Cutting Capacity (mm) | (|
|--------------|------|------------------------|-----------------------|-------------------|-----------------------|--|----------|
| ST70616AST | 4″ | 103.5 | 13.0 | 16.5 | 16.5 | Copper Wire Ø 1.5, Iron Wire Ø 1.3, Medium Hard Wire Ø 1.0 | 6 |

VDE Insulated End Cutting Nipper

- VDE Certified
- For use in high voltage areas, up to 1000 V alternating curr
- Anti-slip handle provides superior comfort and grip
- Clear anti-rust coating prolongs tool life
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.13M

| Article Code | Size | Overall Length (mm) | Jaw Thickness (mm) | Jaw Width (mm) | Overall Width (mm) | (|
|--------------|------|------------------------|-----------------------|-------------------|-----------------------|----------|
| ST70141ST | 6″ | 170.0 | 9.0 | 24.6 | 108.3 | 6 |

End Cutting Pliers

- Heavy duty cutting edges treated with additional induction hardening
- Polished head resists rust and corrosion
- Professional, ergonomic grips wipe clean easily
- Meets or exceeds ASME B107.500

| Article Code | Size | Overall Length (mm) | Overall Width (mm) | \$ |
|--------------|------|---------------------|--------------------|-----------|
| ST70601ME | 6″ | 158.0 | 47.0 | 10 |
| ST70602ME | 8″ | 199.0 | 47.0 | 10 |

Groove Joint Pliers

- Angled tooth locking pliers pattern for superior grip
- Interlocking tongue and groove design won't slip
- Multiple jaw positions for optimized handle span and improved gripping comfort
- Induction hardened with angled teeth grip flat, curved, square or hexagonal objects
- Anti-slip handle provides superior comfort and grip
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.500

| Article Code | Size | Overall Length (mm) | Jaw Thickness (mm) | Overall Width (mm) | Pipe Diameter (mm) | |
|--------------|------|---------------------|--------------------|--------------------|--------------------|---|
| ST70411ST | 8″ | 208.0 | 10.0 | 48.0 | 4-31 | 6 |
| ST70412ST | 10″ | 262.0 | 11.0 | 61.0 | 5-45 | 6 |
| ST70413ST | 12″ | 321.0 | 12.0 | 68.0 | 5-54 | 2 |
| ST70414ST | 16″ | 426.0 | 17.0 | 71.0 | 10-92 | 3 |



| rent | IOUOV | |
|------|------------|--|
| | 1 10/2 101 | |





Slip Joint Pliers

- Two different jaw positions with wire cutter near pivot to provide maximum leverage and powerful cutting
- Rivet construction with precision machined joint interlock assures smooth, positive joint action, no chance of slipping position or coming apart under load
- Anti-slip handle provides superior comfort and grip
- Induction hardened with angled teeth grip flat, curved, square or hexagonal objects
- Meets or exceeds ASME B107.500

| Article Code | Size | Overall Length (mm) | Jaw Thickness (mm) | Jaw Width (mm) | Overall Width (mm) | Pipe Diameter (mm) | (|
|--------------|------|------------------------|-----------------------|-------------------|-----------------------|-----------------------|----------|
| ST70511ST | 6″ | 160.0 | 9.5 | 29.0 | 55.0 | 5-30 | 6 |
| ST70512ST | 8″ | 208.0 | 10.5 | 31.0 | 55.0 | 6-36 | 6 |

2-piece Double X-Pliers Set

| Article Code | Content | |
|--------------|---|---|
| ST70003U | 1 - Straight Double-X Pliers 1 - 45° Double-X Pliers | 3 |



Double-X Pliers

- Jaws open wider than the handles for added reach in tight locations
- Flush rivets are stronger and have a thinner profile
- Compound joint opens wider with less effort and minimal handle movement
- Serrated jaws for precision gripping in restricted areas

| Article Code | Size | Overall Length (mm) | Jaw Thickness (mm) | Jaw Width (mm) | (|
|--------------|----------------------|---------------------------|--------------------------|----------------------|----------|
| ST70711ST | Straight, 13-1/2″ | 340.0 | 10.0 | 17.0 | 3 |



- TPE two-tone anti-slip handle provides superior comfort and grip
- Manufactured from Chrome Vanadium Steel (Cr-V) for greater strength and durability
- Meets or exceeds ASME B107.500

| | Article Code | Size | Overall Length (mm) | Jaw Thickness (mm) | Jaw Width (mm) | \$ |
|---|--------------|--------------|---------------------------|--------------------------|----------------------|-----------|
| 3 | ST70721ST | 45°, 13-1/2″ | 355.0 | 10.0 | 17.0 | 3 |

II II

and C is a company of the second seco

Wire and Cable Cutting Pliers

- Optimized blade angle for cutting copper and aluminum cable
- Professional dipped grips for easy cleaning and better control
- Anti-slip handle provides superior comfort and grip
- Meets or exceeds ASME B107.500

| Article Code | Size | Overall Length (mm) | Jaw Thickness (mm) | Jaw Width (mm) | Overall Width (mm) | Cutting Capacity (mm) | (|
|--------------|------|------------------------|-----------------------|-------------------|-----------------------|--------------------------|----------|
| ST72501ST | 6″ | 150.0 | 160.0 | 51.0 | 13.0 | Ø9 | 6 |
| ST72502ST | 8″ | 200.0 | 12.0 | 68.0 | 5-54 | Ø 11 | 6 |
| ST72503ST | 10″ | 250.0 | 17.0 | 71.0 | 10-92 | Ø 13 | 6 |

Plastic Flush Cutting Pliers

- Sharp edges for slicing plastic and vinyl-coated cable
- Professional dipped grips for easy cleaning and better control
- Laser hardened cutting edges cut clean and remain sharp 50% longer
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Not for use in cutting metal material
- Meets or exceeds ASME B107.500

Nature of this product is subject to wear and tear upon usage. Not covered under Lifetime Warranty.

| Article Code | Size | Overall Length (mm) | Overall Width (mm) | Cutting Capacity (mm) | |
|--------------|------|---------------------|--------------------|-----------------------|---|
| ST70642ST | 6″ | 161.0 | 55.0 | Resin Ø 5 | 6 |

Curved Jaw Locking Pliers

- Versatile curved jaw features integral wire cutter
- Angled tooth locking pliers pattern for superior grip
 Compound locking action for powerful non-slip
- compound locking action for powerful non-slip locking grip
- Locking mechanism provides strong and stable hold
- Nickel-plated finish resists rust and corrosion
- Chrome molybdenum alloy steel (Cr-Mo) for exceptional strength and durability
- Meets or exceeds ASME B107.500

| Article Code | Size | Overall Length (mm) | Jaw Thickness (mm) | Jaw Width (mm) | Overall Width (mm) | |
|--------------|------|---------------------|--------------------|----------------|--------------------|---|
| ST70621ME | 7″ | 189.0 | 13.0 | 52.0 | 52.0 | 6 |
| ST70622ME | 10″ | 244.0 | 21.2 | 65.8 | 65.8 | 6 |







Curved Jaw Locking Pliers

- Versatile curved jaw features integral wire cutter
- Angled tooth locking pliers pattern for superior grip
- Compound locking action for powerful non-slip locking grip
- Locking mechanism provides strong and stable hold
- Nickel-plated finish resists rust and corrosion
- Chrome molybdenum alloy steel (Cr-Mo) for exceptional strength and durability
- Meets or exceeds ASME B107.500



| Article Code | Size | Overall Length (mm) | Jaw Thickness (mm) | Jaw Width (mm) | Overall Width (mm) | |
|--------------|------|---------------------|--------------------|----------------|--------------------|---|
| ST71101ST | 5″ | 144.0 | 6.4 | 37.0 | 38.0 | 6 |
| ST71102ST | 7″ | 186.0 | 7.1 | 51.0 | 52.0 | 6 |
| ST71103ST | 10″ | 244.0 | 9.7 | 63.0 | 65.8 | 6 |

X-Jaw Locking Pliers

- Versatile X-jaw features integral wire cutter
- Angled tooth locking pliers pattern for superior grip
- Compound locking action for powerful non-slip locking grip
- Locking mechanism provides strong and stable hold
- Nickel-plated finish resists rust and corrosion
- Chrome molybdenum alloy steel (Cr-Mo) for exceptional strength and durability
- Meets or exceeds ASME B107.500



| Article Code | Size | Overall Length (mm) | Jaw Thickness (mm) | Jaw Width (mm) | Overall Width (mm) | |
|--------------|------|---------------------|--------------------|----------------|--------------------|---|
| ST71002 | 10″ | 220.0 | 9.7 | 63.0 | 65.8 | 6 |

Straight Jaw Locking Pliers

- Versatile straight jaw features integral wire cutter
- Angled tooth locking pliers pattern for superior grip
- Compound locking action for powerful non-slip locking grip
- Locking mechanism provides strong and stable hold
- Nickel-plated finish resists rust and corrosion
- Chrome molybdenum alloy steel (Cr-Mo) for exceptional strength and durability
- Meets or exceeds ASME B107.500

| Article Code | Size | Overall Length (mm) | Jaw Thickness (mm) | Jaw Width (mm) | Overall Width (mm) | | |
|--------------|------|---------------------|--------------------|----------------|--------------------|---|--|
| ST71202ST | 7″ | 185.0 | 11.2 | 51.0 | 52.0 | 6 | |
| ST71203ST | 10″ | 224.0 | 16.0 | 57.0 | 65.8 | 6 | |



- Versatile jaw features integral wire cutter
- Angled tooth locking pliers pattern for superior grip
- Compound locking action for powerful non-slip locking grip
- Locking mechanism provides strong and stable hold
- Nickel-plated finish resists rust and corrosion
- Chrome molybdenum alloy steel (Cr-Mo) for exceptional strength and durability
- Meets or exceeds ASME B107.500

| Article Code | Size | Overall Length (mm) | Jaw Thickness (mm) | Jaw Capacity (mm) | Max. Cutter Opening (mm) | |
|--------------|------|---------------------|--------------------|-------------------|--------------------------|---|
| ST71301ST | 6″ | 169.0 | 4.1 | 62.0 | 7.0 | 6 |
| ST71302ST | 9″ | 225.0 | 4.8 | 86.0 | 23 | 6 |

Welding Clamp Locking Pliers

- Compound action for powerful non-slip locking grip
- Aggressive grip pattern on tightening knurl
- Locking mechanism provides strong and stable hold
- Nickel-plated finish resists rust and corrosion
- Chrome molybdenum alloy steel (Cr-Mo) for exceptional strength and durability
- Meets or exceeds ASME B107.500

| Article Code | Size | Overall Length (mm) | Jaw Thickness (mm) | Jaw Width (mm) | Overall Width (mm) | |
|--------------|------|---------------------|--------------------|----------------|--------------------|---|
| ST71401SC | 9″ | 204.0 | 79.5 | 62.0 | 70.0 | 6 |

Metal Sheet Clamp Locking Pliers

- Compound action for powerful non-slip locking grip
- Aggressive grip pattern on tightening knurl
- Locking mechanism provides strong and stable hold
- Nickel-plated finish resists rust and corrosion
- Chrome molybdenum alloy steel (Cr-Mo) for exceptional strength and durability
- Meets or exceeds ASME B107.500

| Article Code | Size | Overall Length (mm) | Jaw Thickness (mm) | Jaw Width (mm) | Overall Width (mm) | |
|--------------|------|---------------------|--------------------|----------------|--------------------|---|
| ST71501SC | 8″ | 232.0 | 79.5 | 52.0 | 78.5 | 6 |

| | 9 SATA | | |
|--------|--------------------------|---|--|
| (CTHE) | INV RAL A 7 deletting | - | |
| | | | |
| | | | |







C-Clamps Locking Pliers

- Compound action for powerful non-slip locking grip
- Aggressive grip pattern on tightening knurl
- Locking mechanism provides strong and stable hold
- Nickel-plated finish resists rust and corrosion
- Chrome molybdenum alloy steel (Cr-Mo) for exceptional strength and durability
- Meets or exceeds ASME B107.500



| Article Code | Size | Overall Length (mm) | Jaw Thickness (mm) | Jaw Capacity (mm) | Jaw Width (mm) | Jaw Depth (mm) | |
|--------------|------|---------------------|--------------------|-------------------|----------------|----------------|---|
| ST71601SC | 11″ | 280.0 | 12.7 | 93.0 | 139.7 | 78.0 | 6 |

Chain Clamp Locking Pliers

- Compound action for powerful non-slip locking grip
- Aggressive grip pattern on tightening knurl
- Locking mechanism provides strong and stable hold
- Nickel-plated finish resists rust and corrosion
- Chrome molybdenum alloy steel (Cr-Mo) for exceptional strength and durability
- Meets or exceeds ASME B107.500



| Article Code | Size | Overall Length (mm) | Jaw Thickness (mm) | Jaw Width (mm) | Chain Length (mm) | |
|--------------|------|---------------------|--------------------|----------------|-------------------|---|
| ST71701SC | 19″ | 213.0 | 5.8 | 60.7 | 485.0 | 6 |

5 Pc. Combination Snap Ring Pliers Set

| Article Code | Content | |
|--------------|--|---|
| ST09251SJ | 1 - Snap Ring Pliers 1 - 1.2 mm Straight Tip 1 - 1.4 mm Straight Tip 1 - 45° Tip 1 - 90° Tip | 6 |



Snap Ring Pliers

- Professional dipped grips for easy cleaning and better control
- Heat treated for long lasting durability
- Black oxide finish to resist corrosion

| Article Code | Size | Overall Length (mm) | Circlip (mm) | Dia.(±0.2) (mm) | \$ | Article Code | Size | Overall Length (mm) | Circlip (mm) | Dia.(±0.2) (mm) | \$ |
|--------------|------------------------------|---------------------------|-----------------|--------------------|-----------|--------------|----------------------------|---------------------------|-----------------|--------------------|-----------|
| ST72001ST | External, Straight, 7″ | 175.0 | 19.0 - 60.0 | Ø 1.7 | 6 | ST72002ST | External, Curved, 7" | 175.0 | 19.0 - 60.0 | Ø 1.7 | 6 |



| Article Code | Size | Overall Length (mm) | Circlip (mm) | Dia.(±0.2) (mm) | | Article Code | Size | Overall Length (mm) | Circlip (mm) | Dia.(±0.2) (mm) | \$ |
|--------------|------------------------------|---------------------------|-----------------|--------------------|---|--------------|----------------------------|---------------------------|-----------------|--------------------|-----------|
| ST72004ST | Internal, Straight, 7″ | 175.0 | 19.0 - 60.0 | Ø 1.7 | 6 | ST72005ST | Internal, Curved, 7" | 175.0 | 19.0 - 60.0 | Ø 1.7 | 6 |



Tempered steel construction offers strength and durability for long-lasting performance Meets or exceeds ASME B107.500







German Style Snap Ring Pliers

- Professional dipped grips for easy cleaning and better control
- Heat treated for long lasting durability
- Black oxide finish to resist corrosion

- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.500



| Article Code | Size | Overall Length (mm) | Circlip (mm) | Overall Width (mm) | Dia.(±0.2) (mm) | |
|--------------|-------------------------|---------------------|--------------|--------------------|------------------|---|
| ST72011ST | External, Straight, 5" | 142.0 | 10.0 - 18.0 | 50.0 | 1.25 | 6 |
| ST72012ST | External, Straight, 7" | 175.0 | 19.0 - 60.0 | 51.0 | 1.75 | 6 |
| ST72013ST | External, Straight, 9" | 228.0 | 32.0 - 80.0 | 51.0 | 2.15 | 6 |
| ST72014ST | External, Straight, 13" | 325.0 | 80.0 - 140.0 | 50.0 | 2.95 | 6 |

| Article Code | Size | Overall Length (mm) | Circlip (mm) | Overall Width (mm) | Dia.(±0.2) (mm) | |
|--------------|-----------------------|---------------------|--------------|--------------------|------------------|---|
| ST72041ST | Internal, Curved, 5" | 133.0 | 10.0 - 18.0 | 50.0 | 1.25 | 6 |
| ST72042ST | Internal, Curved, 7" | 169.0 | 19.0 - 60.0 | 51.0 | 1.75 | 6 |
| ST72043ST | Internal, Curved, 9" | 215.0 | 32.0 - 80.0 | 51.0 | 2.15 | 6 |
| ST72044ST | Internal, Curved, 13" | 297.0 | 80.0 - 140.0 | 50.0 | 2.95 | 6 |



| Article Code | Size | Overall Length (mm) | Circlip (mm) | Overall Width (mm) | Dia.(±0.2) (mm) | |
|--------------|-----------------------|---------------------|--------------|--------------------|------------------|---|
| ST72021ST | External, Curved, 5" | 134.0 | 10.0 - 18.0 | 50.0 | 1.25 | 6 |
| ST72022ST | External, Curved, 7" | 163.0 | 19.0 - 60.0 | 51.0 | 1.75 | 6 |
| ST72023ST | External, Curved, 9" | 213.0 | 32.0 - 80.0 | 51.0 | 2.15 | 6 |
| ST72024ST | External, Curved, 13" | 303.0 | 80.0 - 140.0 | 50.0 | 2.95 | 6 |



| Article Code | Size | Overall Length (mm) | Circlip (mm) | Overall Width (mm) | Dia.(±0.2) (mm) | |
|--------------|-------------------------|---------------------|--------------|--------------------|------------------|---|
| ST72031ST | Internal, Straight, 5" | 141.0 | 10.0 - 18.0 | 50.0 | 1.25 | 6 |
| ST72032ST | Internal, Straight, 7" | 180.0 | 19.0 - 60.0 | 51.0 | 1.75 | 6 |
| ST72033ST | Internal, Straight, 9" | 230.0 | 32.0 - 80.0 | 51.0 | 2.15 | 6 |
| ST72034ST | Internal, Straight, 13" | 317.0 | 80.0 - 140.0 | 50.0 | 2.95 | 6 |

Electrical Wire Stripper and Crimper

- All-purpose tool includes pliers type nose, crimper, wire cutter, stripper and bolt cutter
- Wire Stripping Range: 0.5 6.0 mm
- Crimps insulated and non insulated terminals: non-insulated auto 7 - 8 mm; insulated electrical 22 - 20 to 12 - 10 AWG; electrical 22 - 20 to 22 - 10 AWG
- Bolt cutting range M2.6 to M5
- Professional dipped grips for easy cleaning
- Ergonomic handle with dipping for optimal comfort and control
- Meets or exceeds ASME B107.500

| Article Code | Size |
|--------------|------|
| ST97521ST | 8" |






| Overall Length (mm) | |
|---------------------|---|
| 200.0 | 6 |

Crimping Pliers

- Locking mechanism is easy to operate push button, set and release
- Made of carbon steel with fiberglass handle
- High accuracy crimping pin securely connects connector with cable wire without any damage

Crimping Pliers for D-SUB Terminals







| Cat. No. | Size | Overall Length (mm) | Jaw Width (mm) | |
|----------|------|---------------------|----------------|---|
| ST91101 | 8″ | 204.0 | 67.0 | 4 |

Crimping Pliers for European Cable Terminals



| Cat. No | Size | Overall Length (mm) | Jaw Width (mm) | |
|----------|------|---------------------|----------------|---|
| ST91102S | Г 8″ | 204.0 | 67.0 | 6 |

Crimping Pliers for Coaxial Cable

| Crimping Range (| mm²) |
|------------------|------|
| 1.72 | |
| 2.5 | |
| 5.4 | |
| 6.48 | |
| 8.2 | |



| Cat. No. | Size | Overall Length (mm) | Jaw Width (mm) | |
|-----------|----------|---------------------|----------------|---|
| ST91104ST | 9 - 1/2" | 241.0 | 72.0 | 6 |

Crimping Pliers for Insulated Terminals

| AWG | Capacity (mm ²) |
|---------|-----------------------------|
| 22 - 18 | 0.5 - 1.0 |
| 16 - 14 | 1.1 - 2.5 |
| 12 - 10 | 4.0 - 6.0 |
| | |

| (| Cat. No. | Size | Overall Length (mm) | Jaw Width (mm) | |
|---|-----------|------|---------------------|----------------|---|
| S | ST91105ST | 9″ | 228.0 | 67.0 | 6 |

Crimping Pliers for Non-Insulated Terminals

| AWG | Capacity (mm ²) | |
|---------|-----------------------------|-----------------|
| 22 - 16 | 1.5 | |
| 16 - 12 | 2.5 - 4.0 | |
| 12 - 10 | 6.0 - 8.0 | |
| 8 - 6 | 10.0 | |
| | | Crimp Shape: |

| 22 - 16 16 - 12 | 1.5 2.5 - 4.0 | ~~ | 0 | | |
|---|--|------------|---------------------|----------------|---|
| 12 - 10 | 6.0 - 8.0 | | and a | 0 01 | |
| 8 - 6 | 10.0 | | Crimp | 6 | |
| 0.1.11 | | | Crimp Shape: | | |
| Cat. No. | Size | | Overall Length (mm) | Jaw Width (mm) | 4 |
| ST91106ST | 10 - 1/ | /4" | 260.0 | 76.0 | 6 |
| - | | r Non-Insu | Ilated Terminals | | |
| Crimpi AWG 22 - 18 16 - 14 | ng Pliers for Capacity (mm²) 0.5 - 1.0 11 - 2.5 | r Non-Insu | llated Terminals | @SATA HUT | |
| AWG 22 - 18 | Capacity (mm²) 0.5 - 1.0 | r Non-Insu | llated Terminals | O CO | |
| AWG 22 - 18 16 - 14 12 - 10 | Capacity (mm²) 0.5 - 1.0 1.1 - 2.5 4.0 - 6.0 | C. C. C. | Crimp Shape: | | |
| AWG 22 - 18 16 - 14 | Capacity (mm²) 0.5 - 1.0 1.1 - 2.5 | C. C. C. | | 2 | |

| 22 - 16 | 1.5 | 1 | 07 | | |
|----------------------------------|--|----------|---------------------|----------------|-----------|
| 16 - 12 | 2.5 - 4.0 | ~ | | SATA HIM | |
| 12 - 10 | 6.0 - 8.0 | | and a second | 0 01 | |
| 8 - 6 | 10.0 | Y | Crimn | 6 0 8 | |
| | | | Crimp Shape: | | |
| | | | | | |
| at. No. | Size | | Overall Length (mm) | Jaw Width (mm) | \$ |
| 91106ST | 10 - 1/4 | +" | 260.0 | 76.0 | 6 |
| rimpi | ng Pliers for | Non-Insu | lated Terminals | | |
| r impi ^{AWG} | ng Pliers for Capacity (mm ²) | Non-Insu | lated Terminals | | |
| AWG | - | Non-Insu | lated Terminals | 95ATA #157 | |
| AWG 22 - 18 | Capacity (mm²) | Non-Insu | lated Terminals | SRTR HUZ | |
| - | Capacity (mm²) 0.5 - 1.0 | Non-Insu | llated Terminals | SATA HAT | |
| AWG 22 - 18 16 - 14 | Capacity (mm²) 0.5 - 1.0 1.1 - 2.5 | Non-Insu | | | |
| AWG 22 - 18 16 - 14 | Capacity (mm²) 0.5 - 1.0 1.1 - 2.5 | Non-Insu | lated Terminals | | |
| AWG 22 - 18 16 - 14 | Capacity (mm²) 0.5 - 1.0 1.1 - 2.5 | Non-Insu | | | |
| AWG 22 - 18 16 - 14 | Capacity (mm²) 0.5 - 1.0 1.1 - 2.5 | | | | |

| 16 - 12 12 - 10 8 - 6 | 1.5 2.5 - 4.0 6.0 - 8.0 10.0 | 2 | Crimp | SATA IIIM | |
|----------------------------------|--|---|-------------------------------------|----------------|---|
| Cat. No. | Size | | Crimp Shape: Overall Length (mm) | Jaw Width (mm) | 4 |
| ST91106ST | 10 - 1/4 | +" | 260.0 | 76.0 | 6 |
| - | - | Non-Insu | llated Terminals | | |
| AWG 22 - 18 | Capacity (mm²) 0.5 - 1.0 | Non-Insu | llated Terminals | SHTR HUT | |
| AWG 22 - 18 16 - 14 | Capacity (mm²) 0.5 - 1.0 1.1 - 2.5 | Non-Insu | Ilated Terminals | | |
| AWG 22 - 18 | Capacity (mm²) 0.5 - 1.0 | Non-Insu | llated Terminals | BERTR HUT | |
| AWG 22 - 18 16 - 14 | Capacity (mm²) 0.5 - 1.0 1.1 - 2.5 | Non-Insu | Ilated Terminals | | |
| AWG 22 - 18 16 - 14 | Capacity (mm²) 0.5 - 1.0 1.1 - 2.5 | Contraction of the second s | | | |



Cutters & Snips

11

5 Pc. Mini File Set 8"

| Article Code | Content | | Article Code | Content | |
|--------------|--|----|--------------|--|---|
| ST03901ME | Mini Flat Second Cut File Mini Half Round Second Cut File Mini Square Second Cut File Mini Round Second Cut File Mini Three Square Second Cut File | 12 | ST50402 | 1 - Ratcheting T-Handle 1 - Small Tap Adapter 1 - Medium Tap Adapter 1 - Die Adapter 1 - T-Handle Bar for Adapters | 5 |





This product is consumable, not within SATA Lifetime Warranty



5 Pc. 3/8" Medium Ratcheting Tap and Die Drive Tool Set



This product is consumable, not within SATA Lifetime Warranty

11 Cutters & Snips

Wire Stripper with Cutter

- Accurate wire stripping pin for easy cutting of insulated wire surface without damaging the inner wire
- Professional dipped grips for easy cleaning and better control
- Circlip design for convenient storage
- Made of high carbon steel
- Meets or exceeds ASME B107.500

| | SRTR SIZE |
|------------------|-----------|
| 22121111 2 · (3) | |
| | |

| Article Code | Size | Overall Length (mm) | Jaw Thickness (mm) | Jaw Width (mm) | Overall Width (mm) | AWG | Capacity (mm²) | \$ |
|--------------|------|------------------------|-----------------------|-------------------|-----------------------|---------|-------------------|-----------|
| ST91201ST | 6″ | 155.0 | 7.5 | 51.0 | 77.0 | 20 - 30 | 0.05 - 0.52 | 6 |
| ST91202ST | 7″ | 183.0 | 7.5 | 60.0 | 77.0 | 10 - 22 | 0.52 - 5.26 | 6 |

Automatic Wire Stripper

- Accurate wire stripping pin for easy cutting of insulated wire surface without damaging the inner wire
- Anti-slip handle provides superior comfort and grip
- Adjustable wire stop lets you set exactly how much insulation is removed without the need of marking wires
- Spring mechanism automatically returns back to the open position
- Oxide finish to resist corrosion
- Meets or exceeds ASME B107.500

Nature of this product is subject to wear and tear upon usage. Not covered under Lifetime Warranty.

| Article Code | Size | Overall Length (mm) | Wire Capacity (mm) | (|
|--------------|------|---------------------|----------------------|----------|
| ST91212ST | 7" | 204.0 | Ø 0.5, 1.2, 1.6, 2.0 | 6 |
| ST91213ST | 7" | 204.0 | Ø 1, 1.6, 2.6, 3.2 | 6 |

Self Adjusting Wire Stripper

- Self-adjusting with hardened steel blades
- Meets or exceeds ASME B107.500



| Article Code | Size | Overall Length (mm) | Jaw Thickness (mm) | Jaw Width (mm) | Wire Stripping Range (mm) | \$ |
|--------------|----------|------------------------|-----------------------|-------------------|---|-----------|
| ST91108ST | 6 - 1/2" | 170.0 | 18.5 | 80.0 | Single wire or flat cable of diameter from 0.5 to 6.0 | 6 |

Aviation Tin Snips, Left

- Left cuts steel up to 1.2 mm (18 ga)
- Induction hardened serrated cutting edges for a long tool life
- Optimized hand & finger contact points in handle to maximize fit, control, and user ergonomics
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Hardened HRC 55 60
- Meets or exceeds ASME B107.16M

Nature of this product is subject to wear and tear upon usage. Not covered under Lifetime Warranty.

| Article Code | Size | Overall Length (mm) | Blade Length (mm) | Overall Width (mm) | |
|--------------|------|---------------------|-------------------|--------------------|---|
| ST93101ST | 10″ | 250.00 | 40.0 | 77.0 | 6 |

Aviation Tin Snips, Right

- Right cuts steel up to 1.2 mm (18 ga)
- Induction hardened serrated cutting edges for a long tool life
- Optimized hand & finger contact points in handle to maximize fit, control, and user ergonomics
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Hardened HRC 55 60
- Meets or exceeds ASME B107.16M

Nature of this product is subject to wear and tear upon usage. Not covered under Lifetime Warranty.

| Article Code | Size | Overall Length (mm) | Blade Length (mm) | Overall Width (mm) | |
|--------------|------|---------------------|-------------------|--------------------|---|
| ST93102ST | 10″ | 250.00 | 40.0 | 77.0 | 6 |

Aviation Tin Snips, Straight

- Straight cuts steel up to 1.2 mm (18 ga)
- Induction hardened serrated cutting edges for a long tool life
- Optimized hand & finger contact points in handle to maximize fit, control, and user ergonomics
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Hardened HRC 55 60
- Induction hardened cutting edges 6 62 HRC
- Meets or exceeds ASME B107.16M

Nature of this product is subject to wear and tear upon usage. Not covered under Lifetime Warranty.

| Article Code | Size | Overall Length (mm) | Blade Length (mm) | Overall Width (mm) | |
|--------------|------|---------------------|-------------------|--------------------|---|
| ST93103ST | 10″ | 250.0 | 40.0 | 77.0 | 6 |
| ST93104ST | 11″ | 275.0 | 80.0 | 77.0 | 6 |










Straight Pattern Tinner's Snip

- Cuts cold rolled steel
- Drop forged construction
- Induction hardened serrated cutting edges for a long tool life
- Comfort grips for ease of use and slip protection
- For trimming extra heavy stock
- Meets or exceeds ASME B107.16M





| Article Code | Size | Overall Length (mm) | Blade Length (mm) | Overall Width (mm) | Cold Rolled Iron Sheet (mm) | Stainless Steel Sheet (mm) | \$ |
|--------------|------|------------------------|----------------------|-----------------------|--------------------------------|-------------------------------|-----------|
| ST93302ST | 8″ | 205.0 | 40.0 | 87.0 | 0.61 | 0.41 | 6 |
| ST93303ST | 10″ | 254.0 | 60.0 | 105.0 | 0.78 | 0.45 | 6 |
| ST93304ST | 12″ | 305.0 | 70.0 | 110.0 | 0.91 | 0.63 | 12 |
| ST93305ST | 14″ | 355.0 | 90.0 | 110.0 | 1.2 | 0.7 | 6 |
| ST93306ST | 16″ | 425.0 | 100.0 | 145.0 | 1.6 | 1.0 | 6 |

Heavy Duty Bolt Cutter

- Drop forged, precision ground alloy steel jaws for maximum durability and cut life
- Cuts low carbon steel and carbon steel
- Center cut jaws
- Ergonomic non-slip grips for safe cutting
- Adjustable jaw for better cuts, depending on the material
- Hardened steel jaws with angled cutting grooves
- Meets or exceeds ASME B107.16M



Nature of this product is subject to wear and tear upon usage. Not covered under Lifetime Warranty.

| Article | Code | Size | Overall Length (mm) | Overall Width (mm) | Cutting Capacity (mm) | |
|---------|------|------|---------------------|--------------------|---|---|
| ST93501 | SC | 8″ | 212.5 | 63.5 | Low Carbon Steel Ø 3.17 (1/8"), Medium Carbon Steel Ø 3.17 (1/8") | 6 |

Heavy Duty Bolt Cutter

- Drop forged, precision ground alloy steel jaws for maximum durability and cut life
- Cuts low carbon steel and carbon steel
- Center cut jaws
- Ergonomic non-slip grips for safe cutting
- Adjustable jaw for better cuts, depending on the material
- Hardened steel jaws with angled cutting grooves
- Meets or exceeds ASME B107.16M

| Nature of this product is subject to wear and tear upon usage. Not covered under Lifetime Warranty. |
|--|
| Not bovor ou undor Enotimo Warranty. |

| Article Code | Size | Overall Length (mm) | Overall Width (mm) | Cutting Capacity (mm) | |
|--------------|------|---------------------|--------------------|--|---|
| ST93502ST | 12″ | 325.0 | 139.0 | Low Carbon Steel Ø 5(3/16"), Medium Carbon Steel Ø 4(5/12") | 1 |
| ST93503ST | 14″ | 370.0 | 140.0 | Low Carbon Steel Ø 7 (1/4"), Medium Carbon Steel Ø 5 (3/16") | 1 |
| ST93504ST | 18″ | 470.0 | 141.0 | Low Carbon Steel Ø 8 (5/16"), Medium Carbon Steel Ø 6 (1/4") | 1 |
| ST93505ST | 24" | 634.0 | 160.0 | Low Carbon Steel Ø 10 (3/8"), Medium Carbon Steel Ø 8 (5/16") | 1 |
| ST93506ST | 30″ | 765.0 | 180.0 | Low Carbon Steel Ø 13 (1/2"), Medium Carbon Steel Ø 10 (3/8") | 1 |
| ST93507ST | 36″ | 917.0 | 190.0 | Low Carbon Steel Ø 16 (5/8"), Medium Carbon Steel Ø 12 (7/16") | 1 |
| ST93508ST | 42" | 1053.0 | 210.0 | Low Carbon Steel Ø 19 (3/4"), Medium Carbon Steel Ø 14 (9/16") | 1 |
| ST93509ST | 48″ | 1213.0 | 250.0 | Low Carbon Steel Ø 22 (7/8"), Medium Carbon Steel Ø 16 (5/8") | 1 |

Plastic Snap-off Knife, 13-point

- Built in blade snapper that slides out of the body for easy access
- SK2 blades available for extended blade life
- Steel blade sleeve for increased durability
- 13-point snap-off blade

| Nature of this product is subject to wear and tear upon usage. Not covered under Lifetime Warranty. |
|--|
| Not covered under Lifetime Warranty. |

| Article Code | Blade Length (mm) | Blade Width (mm) | Blade Thickness (mm) | \$ |
|--------------|-------------------|------------------|----------------------|-----------|
| ST93426SC | 80.0 | 9.0 | 0.4 | 12 |







Rubber Grip Snap-off Knife, 8-point

- Built in blade snapper that slides out of the body for easy access
- SK2 blades available for extended blade life
- Steel blade sleeve for increased durability
- Comfort grip for ease of use and slip protection
- 8-point snap-off blade


Nature of this product is subject to wear and tear upon usage. Not covered under Lifetime Warranty.

| Article Code | Blade Length (mm) | Blade Width (mm) | Blade Thickness (mm) | |
|--------------|-------------------|------------------|----------------------|----|
| ST93428SC | 100.0 | 18.0 | 0.5 | 12 |

Plastic Snap-off Knife, 8-point

- Built in blade snapper that slides out of the body for easy access
- SK2 blades available for extended blade life
- Steel blade sleeve for increased durability
- Comfort grip for ease of use and slip protection
- 8-point snap-off blade






| Article Code | Blade Length (mm) | Blade Width (mm) | Blade Thickness (mm) | \$ |
|--------------|-------------------|------------------|----------------------|-----------|
| ST93429 | 100.0 | 18.0 | 0.5 | 12 |

T Series 18 mm Soft Grip Utility Knife

- Steel blade sleeve for increased durability
- Unique dual material case with thumb bridge for added comfort
- Built in blade snapper that slides out of the body for easy access
- SK2 blades available for extended blade life
- Ergonomic dual material improves grip while reducing hand fatigue



| Article Code | Blade Length (mm) | Blade Width (mm) | Blade Thickness (mm) | \$ |
|--------------|-------------------|------------------|----------------------|-----------|
| ST93482 | 100.0 | 18.0 | 0.5 | 8 |



- Blade locks in the open position for secure cutting
- Easy access blade storage compartment in the body holds additional blades
- Quick blade replacement for user convenience
- SK2 blades available for extended blade life
- Ergonomic dual material improves grip while reducing hand fatigue
- Includes one loaded blade

| Nature of this product is subject to wear and tear upon usage. Not covered under Lifetime Warranty. |
|--|
| |
| |

| Article Code | Blade Length (mm) | Blade Width (mm) | Blade Thickness (mm) | |
|--------------|-------------------|------------------|----------------------|---|
| ST93486 | 60.0 | 19.0 | 0.6 | 8 |

Zinc Alloy Utility Knife

- Zinc phosphate coating for corrosion resistance
- SK2 blades available for extended blade life
- Comfort grip for ease of use and slip protection
- Easy access blade storage compartment in the body holds additional blades
- Includes 5 spare blades which are stored inside the body

Nature of this product is subject to wear and tear upon usage Not covered under Lifetime Warranty.

| Article Code | Blade Length (mm) | Blade Width (mm) | Blade Thickness (mm) | |
|--------------|-------------------|------------------|----------------------|---|
| ST93441SC | 60.0 | 19.0 | 0.6 | 6 |

Self-Retracting Utility Knife

- Blade automatically retracts when it loses contact with cut material to ensure safety when cutting
- Easy access blade storage compartment in the body holds additional blades
- Quick blade replacement for user convenience
- Unique dual material, ergonomically designed comfort grip. Ideal for repeated cuts
- Includes 5 professional spare blades made from SK2 carbon steel

Nature of this product is subject to wear and tear upon usage. Not covered under Lifetime Warranty.

| Article Code | Blade Length (mm) | Blade Width (mm) | Blade Thickness (mm) | |
|--------------|-------------------|------------------|----------------------|---|
| ST93442SC | 60.0 | 19.0 | 0.6 | 8 |



m







Heavy Duty Utility Knife

- Zinc phosphate coating for corrosion resistance
- SK2 blades available for extended blade life
- Comfort grip for ease of use and slip protection
- Includes 5 spare blades which are stored inside the body



Nature of this product is subject to wear and tear upon usage. Not covered under Lifetime Warranty.

| Article Code | Blade Length (mm) | Blade Width (mm) | Blade Thickness (mm) | \$ |
|--------------|-------------------|------------------|----------------------|-----------|
| ST93443SC | 60.0 | 19.0 | 0.6 | 8 |


Multipurpose Zinc Alloy Utility Knife

- Zinc phosphate coating for corrosion resistance
- Rotate lock design
- SK2 blades available for extended blade life
- Comfort grip for ease of use and slip protection
- Includes 5 spare blades which are stored inside the body



Nature of this product is subject to wear and tear upon usage. Not covered under Lifetime Warranty.

| Article Code | Blade Length (mm) | Blade Width (mm) | Blade Thickness (mm) | \$ |
|--------------|-------------------|------------------|----------------------|-----------|
| ST93446SC | 60.0 | 19.0 | 0.6 | 8 |

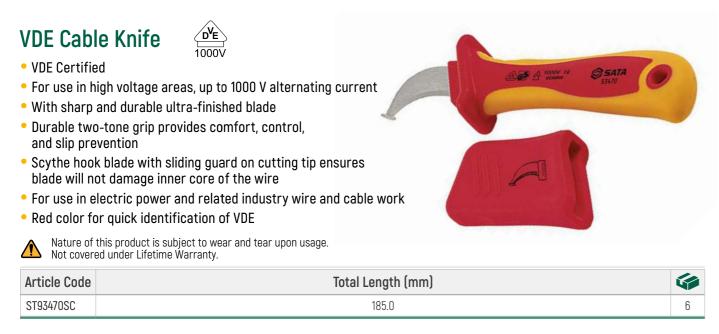

Mini Tubing Cutter

- Ideal for handyman, plumbers, electricians and vehicle mechanics
- Large knurled knob for non-slip grip and precise control
- Compact size for use in tight spaces

| | Nature of this product is subject to wear and tear upon usage. Not covered under Lifetime Warranty. | |
|--|--|--|
|--|--|--|

| Article Code | Overall Length (mm) | Overall Width (mm) | Cutting Capacity (mm) | |
|--------------|---------------------|--------------------|-----------------------|---|
| ST97305ST | 197.0 | 155.0 | 3 - 16 (0.12" - 5/8") | 6 |

Tubing Cutter

- Durable steel construction
- Large knurled handle for maximum grip power
- Spare cutter wheel stored in the handle

| | Nature of this product is subject to wear and tear upon usage. Not covered under Lifetime Warranty. |
|--|--|
|--|--|

| Article Code | Overall Length (mm) | Overall Width (mm) | Cutting Capacity (mm) | |
|--------------|---------------------|--------------------|------------------------|----|
| ST97301ST | 245.0 | 210.0 | 3 - 28 (0.12 - 1.18") | 12 |
| ST97302ST | 245.0 | 210.0 | 3 - 32 (0.12 - 1-1/4") | 12 |

Tubing Cutter

- Durable steel construction
- Large knurled handle for maximum grip power
- Spare cutter wheel stored in the handle

| Not cover | ed under l | Lifetime Wa | arranty. | tear up | usaye. | • |
|-----------|------------|-------------|----------|---------|--------|---|
| | | | | | | |

of this product is subject to user and tear upon upon

| Article Code | Overall Length (mm) | Overall Width (mm) | Cutting Capacity (mm) | |
|--------------|---------------------|--------------------|------------------------|----|
| ST97303ST | 300.0 | 140.0 | 6 - 64 (1/4" - 2-1/2") | 12 |







2 Pc. Replacement Cutter Wheels

- For cutting copper, aluminum, brass and thin wall tubing
- Tempered steel offers strength and durability for longlasting performance
- Black oxide finish to resist corrosion
- Blade for ST97301ST, ST97302ST and ST97305ST Tubing Cutter




Nature of this product is subject to wear and tear upon usage. Not covered under Lifetime Warranty.

| Article Code | Overall Width (mm) | Overall Lenght (mm) | Cutting Capacity (mm) | \$ |
|--------------|--------------------|---------------------|-----------------------|-----------|
| ST97311ST | 155.0 | 197.0 | 3.0 x 18.0 | 12 |

PVC Pipe Cutter

- Heat treated stainless steel blade for long lasting durability
- Handle latch keeps tool closed during storage or when not in use





| Article Code | Cutting Capacity (mm) | |
|--------------|----------------------------|---|
| ST97304ST | 3.0 - 42.0 (0.1" - 1-1/2") | 6 |

Ratcheting Cable Cutter

- Drop forged, precision ground alloy steel jaws for maximum durability and cut life
- Special ratcheting tooth mechanism
- Ergonomic handles and ratcheting action for comfort during repeated cuts
- Compact and leightweight design



| Article Code | Overall Length (mm) | Cutting Capacity (mm) | |
|--------------|---------------------|--|---|
| ST72511 | 245.0 | up to 240 mm ² (0.372 ^{m2}) | 3 |



- ABS handle provides comfort and durability
- Sawtooth body made of high quality spring steel
- Sawtooth edges made of high-speed steel
- Powerful and sharp sawtooth, for smooth cutting and long lasting durability
- One bi-metal 6" saw blade included

| Article Code | Size | Overall Length (mm) | |
|--------------|------|---------------------|---|
| ST93404 | 6" | 150.0 | 6 |

Aluminum Hacksaw

- Ergonomic handle increases overall comfort
- Sawtooth body made of high quality spring steel
- Sawtooth edges made of high-speed steel
- Powerful and sharp sawtooth, for smooth cutting and long lasting durability
- One bi-metal 12" saw blade included

| ST03405SC 12" 300.0 6 | Article Code | Size | Overall Length (mm) | |
|-----------------------|--------------|------|---------------------|---|
| | ST93405SC | 12" | 300.0 | 6 |

100 Pc. Bi-metal Saw Blade

- Sawtooth body made of high quality spring steel
- Sawtooth edges made of high-speed steel
- Powerful and sharp sawtooth, for smooth cutting and long lasting durability

• @5

Mature of this product is subject to wear and tear upon usage. Not covered under Lifetime Warranty.

| Article Code | Size | Teeth per inch | Application | (|
|--------------|------|----------------|---|----------|
| ST93404ME | 12″ | 18 | For sawing 1/4" to 1" thick material, pipe, angle iron and steel bar | 1 |
| ST93405ME | 12″ | 24 | For sawing 1/8" to 1/4" thick material, conduit, heavy steel metal and tubing | 1 |
| ST93406ME | 12″ | 32 | For sawing 1/8" or thinner metal, thin sheet metal and metal trim | 1 |





| . 0 | 24 PER 25mm | FLEXIBLE BIMETAL HIGH SPEED STEEL | NO_93407 | SATA |
|-----|-------------|--|----------|------|
| | | | | |

11 Cutters & Snips

Wood Handle Hand Saw

- Precision hardened teeth for improved cutting performance
- Hardened area at cutting edge around each tooth, softer core avoids tooth rippage
- Teeth sharpened on both sides to provide faster and cleaner cuts
- High frequency heat treated teeth to maintain sharpness
- For cutting wood fiber

A Nature of this product is subject to wear and tear upon usage. Not covered under Lifetime Warranty.

| Article Code | Size | Overall Length (mm) | Teeth per inch | |
|--------------|------|---------------------|----------------|---|
| ST93621ME | 16″ | 400.0 | 7 | 6 |
| ST93622ME | 18″ | 450.0 | 7 | 6 |
| ST93623ME | 20" | 500.0 | 7 | 6 |
| ST93624ME | 22" | 550.0 | 7 | 6 |
| ST93625ME | 24" | 600.0 | 7 | 6 |

Bi-Metal Hole Saw

- Designed to cut wood, copper, aluminum, metal and stainless steel
- High-speed, HRC 65 68 steel constructed teeth for faster cutting and longevity
- Body constructed from alloy steel sheet for superior safety and durability
- Specialized tooth design for higher cutting efficiency



A Nature of this product is subject to wear and tear upon usage. Not covered under Lifetime Warranty.

| Article Code | Size | \$ |
|--------------|---------|-----------|
| ST53301 | 16.0 mm | 20 |
| ST53302 | 19.0 mm | 20 |
| ST53303 | 20.0 mm | 20 |
| ST53304 | 22.0 mm | 20 |
| ST53305 | 25.0 mm | 20 |
| ST53306 | 30.0 mm | 20 |
| ST53307 | 32.0 mm | 12 |
| ST53308 | 35.0 mm | 12 |
| ST53309 | 38.0 mm | 12 |
| ST53310 | 44.0 mm | 18 |
| ST53311 | 51.0 mm | 18 |
| ST53312 | 57.0 mm | 12 |
| ST53313 | 60.0 mm | 12 |
| ST53314 | 64.0 mm | 12 |



Hole Saw Arbor

- Used for connecting the hole saw and drill chuck, and also for positioning when the hole saw is working
- Guide drill bit made of high speed alloy steel for strength and durability
- Quick release spring allows the round disc to easily be taken out after cutting

Nature of this product is subject to wear and tear upon usage. Not covered under Lifetime Warranty.

| Article Code | Applicable Aperture (mm) | Drill Pipe Diameter (mm) | |
|--------------|--------------------------|--------------------------|----|
| ST53401 | 14.0 - 30.0 | 9.5 | 16 |
| ST53402 | 32.0 - 152.0 | 11.1 | 12 |



Screwdrivers & Nut Drivers

合 SATA

6 Pc. Acetate Combination Screwdriver Set

| Article Code | Content | \$ | Article Code | Content | \$ |
|--------------|--|-----------|--------------|---|-----------|
| ST09303ESJ | 3 - Acetate Screwdrivers Phillips #0x75 mm , #1x100 mm, #2x100 mm 3 - Acetate Screwdrivers Slotted 3.2x75 mm, 5x75 mm, 6x100 mm | 5 | ST09306SJ | 4 - Acetate Screwdrivers Phillips #1x75 mm, #2x38 mm, #2x100 mm, #2x150 mm 4 - Acetate Screwdrivers Slotted 5x75 mm, 6x38 mm, 6x100 mm, 6x150 mm | 5 |



10 Pc. Acetate Combination Screwdriver Set

| Article Code | Content | | Article Code | Content | |
|--------------|---|---|--------------|--|---|
| ST09304ESJ | 5 - Acetate Screwdrivers Phillips #1x100 mm, #2x38 mm, #2x100 mm, #2x150 mm, #3x150 mm 5 - Acetate Screwdrivers Slotted 5x75 mm, 6x38 mm, 6x100 mm, 6x150 mm, 8x150 mm | 4 | ST09305SJ | T8x75 mm, T10x100 mm, T15x100 mm, T20x100 mm, T25x100 mm, T27x100 mm, T30x100 mm, T40x100 mm | 5 |



8 Pc. Acetate Combination Screwdriver Set



8 Pc. Acetate Torx® Screwdriver Set



Acetate Screwdriver Slotted

- Blade is made of high performance alloy steel for maximum strength and durability
- Ergonomic acetate handle provides increased comfort and maximized torque
- 100% solid impact resistant acetate handle for lasting durability
- Oil and solvent resistant handle provides a longer tool life
- Handle designed with "through hole" for easy storage
- Tempered steel construction offers strength and durability for long-lasting performance
- Meets or exceeds ASME B107.600



Acetate Screwdriver Phillips

- Blade is made of high performance alloy steel for maximum strength and durability
- Ergonomic acetate handle provides increased comfort and maximized torque
- 100% solid impact resistant acetate handle for lasting durability
- Oil and solvent resistant handle provides a longer tool life
- Handle designed with "through hole" for easy storage
- Tempered steel construction offers strength and durability for long-lasting performance
- Meets or exceeds ASME B107.600

| Article Code | Size (mm) | Shank Length (mm) | Overall Length (mm) | Handle Diameter (mm) | |
|--------------|-----------|-------------------|---------------------|----------------------|----|
| ST62202SC | 3.2 | 75.0 | 146.0 | 23.0 | 12 |
| ST62203SC | 3.2 | 100.0 | 172.0 | 23.0 | 12 |
| ST62204SC | 3.2 | 150.0 | 221.0 | 23.0 | 12 |
| ST62205SC | 3.2 | 200.0 | 271.0 | 23.0 | 12 |
| ST62207SC | 5.0 | 75.0 | 165.0 | 28.0 | 12 |
| ST62208SC | 5.0 | 100.0 | 190.0 | 28.0 | 12 |
| ST62209SC | 5.0 | 150.0 | 240.0 | 28.0 | 6 |
| ST62210SC | 5.0 | 200.0 | 290.0 | 28.0 | 12 |
| ST62211SC | 6.0 | 38.0 | 99.0 | 35.0 | 6 |
| ST62212SC | 6.0 | 100.0 | 202.0 | 32.0 | 12 |
| ST62213SC | 6.0 | 150.0 | 252.0 | 32.0 | 12 |
| ST62214SC | 6.0 | 200.0 | 312.0 | 32.0 | 12 |
| ST62215SC | 6.0 | 250.0 | 352.0 | 32.0 | 12 |
| ST62216SC | 8.0 | 150.0 | 260.0 | 35.0 | 12 |
| ST62217SC | 8.0 | 200.0 | 312.0 | 35.0 | 12 |

| Article Code | Size | Shank Length (mm) | Overall Length (mm) | Handle Diameter (mm) | |
|--------------|------|-------------------|---------------------|----------------------|---|
| ST62302SC | #0 | 75.0 | 146.0 | 23.0 | 6 |
| ST62303SC | #0 | 100.0 | 221.0 | 23.0 | 6 |
| ST62304SC | #0 | 150.0 | 222.0 | 23.0 | 6 |
| ST62305SC | #0 | 200.0 | 272.0 | 23.0 | 6 |
| ST62307SC | #1 | 75.0 | 166.0 | 28.0 | 6 |
| ST62308SC | #1 | 100.0 | 190.0 | 28.0 | 6 |
| ST62309SC | #1 | 150.0 | 240.0 | 28.0 | 6 |
| ST62310SC | #1 | 200.0 | 288.0 | 28.0 | 6 |
| ST62311SC | #2 | 38.0 | 99.0 | 35.0 | 6 |
| ST62312SC | #2 | 100.0 | 202.0 | 32.0 | 6 |
| ST62313SC | #2 | 150.0 | 250.0 | 32.0 | 6 |
| ST62314SC | #2 | 200.0 | 312.0 | 32.0 | 6 |
| ST62315SC | #2 | 250.0 | 325.0 | 32.0 | 6 |
| ST62316SC | #3 | 150.0 | 260.0 | 35.0 | 6 |
| ST62317SC | #3 | 200.0 | 312.0 | 35.0 | 6 |



Acetate Screwdriver Torx[®]

- Blade is made of high performance alloy steel for maximum strength and durability
- Ergonomic acetate handle provides increased comfort and maximized torgue
- 100% solid impact resistant acetate handle for lasting durability
- Oil and solvent resistant handle provides a longer tool life
- Handle designed with "through hole" for easy storage
- Tempered steel construction offers strength and durability for long-lasting performance
- Meets or exceeds Camcar TXF-705



| Article Code | Size | Shank Length (mm) | Overall Length (mm) | Handle Diameter (mm) | |
|--------------|------|-------------------|---------------------|----------------------|---|
| ST61108SC | Т8 | 75.0 | 147.0 | 23.0 | 6 |
| ST61101SC | T10 | 100.0 | 190.0 | 28.0 | 6 |
| ST61102SC | T15 | 100.0 | 190.0 | 28.0 | 6 |
| ST61103SC | T20 | 100.0 | 190.0 | 28.0 | 6 |
| ST61104SC | T25 | 100.0 | 312.0 | 32.0 | 6 |
| ST61105SC | T27 | 100.0 | 202.0 | 32.0 | 6 |
| ST61106SC | T30 | 100.0 | 202.0 | 32.0 | 6 |
| ST61107SC | T40 | 100.0 | 212.0 | 35.0 | 6 |

1/4" Drive Magnetic Bit Driver

- Magnetic bit holder for fastener retention
- Ergonomic acetate handles provide increased comfort and maximized torque
- 100% solid impact resistant acetate handle for lasting durability
- Oil and solvent resistant handle provides a longer tool life
- Handle designed with "through hole" for easy storage
- Meets or exceeds ASME B107.110

| Article Code | Size | Shank Length (mm) | Overall Length (mm) | Handle Diameter (mm) | |
|--------------|------|-------------------|---------------------|----------------------|---|
| ST61002SC | 1/4" | 100.0 | 212.0 | 35.0 | 6 |

1/4" Drive Pistol Grip Ratcheting Bit Driver

- Forward, reverse and lock positions for fast driving on screws and nuts
- Large and soft textured handle for added comfort and excellent grip
- Fitted with bit storage for keeping the most commonly used bits close at hand
- Chrome vanadium bit holder with powerful magnet for strength and holding bit securely in place
- For standard 1/4" Drive bits
- Meets or exceeds ASME B107.110

| Article Code | Size | |
|--------------|-----------------|--|
| ST61003SJ | 1/4" x 100.0 mm | |

10 Pc. Cushion Grip Combination Screwdriver Set

| Article Code | Content | Article Code | Content | |
|--------------|---|--------------|--|---|
| ST09303ME | 5 - Cushion Grip Screwdrivers Phillips #0x75 mm, #1x75 mm, #2x38 mm, #2x100 mm, #3x150 mm 5 - Cushion Grip Screwdrivers Slotted 3x75 mm, 5x100 mm, 6x38 mm, 6x150 mm, 8x150 mm | ST09309SJ | 3 - Dual Material Soft Grip Screwdrivers Phillips #1x75 mm, #2x100 mm, #2x150 mm 3 - Dual Material Soft Grip Screwdrivers Slotted 5x75 mm, 5x100 mm, 6x150 mm | 6 |





6 Pc. Dual Material Soft Grip **Combination Screwdriver Set**



12

Dual Material Soft Grip Screwdriver Slotted

- Blade is made of high performance alloy steel for maximum strength and durability
- High-impact, dual material soft grip handle presents an ergonomic and strong grip
- Sleek handle design for maximum power, user comfort, and greater access
- Oil and solvent resistant handle provides a longer tool life
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.600

| Article Code | Size (mm) | Shank Length (mm) | Overall Length (mm) | Handle Diameter (mm) | |
|--------------|-----------|-------------------|---------------------|----------------------|---|
| ST63402SC | 3.2 | 75.0 | 160.0 | 25.0 | 6 |
| ST63403SC | 3.2 | 100.0 | 185.0 | 25.0 | 6 |
| ST63404SC | 3.2 | 150.0 | 235.0 | 25.0 | 6 |
| ST63405SC | 3.2 | 200.0 | 286.0 | 25.0 | 6 |
| ST63407SC | 5.0 | 75.0 | 180.0 | 31.0 | 6 |
| ST63408SC | 5.0 | 100.0 | 205.0 | 31.0 | 6 |
| ST63409SC | 5.0 | 150.0 | 255.0 | 31.0 | 6 |
| ST63410SC | 5.0 | 200.0 | 306.0 | 31.0 | 6 |
| ST63411SC | 6.0 | 38.0 | 98.0 | 37.0 | 6 |
| ST63412SC | 6.0 | 100.0 | 217.0 | 35.0 | 6 |
| ST63413SC | 6.0 | 150.0 | 267.0 | 35.0 | 6 |
| ST63414SC | 6.0 | 200.0 | 317.0 | 35.0 | 6 |
| ST63415SC | 6.0 | 250.0 | 367.0 | 35.0 | 6 |
| ST63416SC | 8.0 | 150.0 | 276.0 | 38.0 | 6 |
| ST63417SC | 8.0 | 200.0 | 326.0 | 38.0 | 6 |

Dual Material Soft Grip Screwdriver Phillips

- Blade is made of high performance alloy steel for maximum strength and durability
- High-impact, dual material soft grip handle presents an ergonomic and strong grip
- Sleek handle design for maximum power, user comfort, and greater access
- Oil and solvent resistant handle provides a longer tool life
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.600


| Article Code | Size | Shank Length (mm) | Overall Length (mm) | Handle Diameter (mm) | |
|--------------|------|-------------------|---------------------|----------------------|---|
| ST63502SC | #0 | 75.0 | 160.0 | 25.0 | 6 |
| ST63503SC | #0 | 100.0 | 185.0 | 25.0 | 6 |
| ST63504SC | #0 | 150.0 | 235.0 | 25.0 | 6 |
| ST63505SC | #0 | 200.0 | 286.0 | 25.0 | 6 |
| ST63507SC | #1 | 75.0 | 180.0 | 31.0 | 6 |
| ST63508SC | #1 | 100.0 | 205.0 | 31.0 | 6 |
| ST63509SC | #1 | 150.0 | 255.0 | 31.0 | 6 |
| ST63510SC | #1 | 200.0 | 305.0 | 31.0 | 6 |
| ST63511SC | #2 | 38.0 | 98.0 | 37.0 | 6 |
| ST63512SC | #2 | 100.0 | 217.0 | 35.0 | 6 |
| ST63513SC | #2 | 150.0 | 267.0 | 35.0 | 6 |
| ST63514SC | #2 | 200.0 | 317.0 | 35.0 | 6 |
| ST63515SC | #2 | 250.0 | 367.0 | 35.0 | 6 |
| ST63516SC | #3 | 150.0 | 276.0 | 38.0 | 6 |
| ST63517SC | #3 | 200.0 | 326.0 | 38.0 | 6 |



Dual Material Soft Grip Reversible Screwdriver

- Blade is made of high performance alloy steel for maximum strength and durability
- Reversible tip for Phillips and Slotted applications
- High-impact, dual material soft grip handle presents an ergonomic and strong grip
- Sleek handle design for maximum power, user comfort, and greater access
- Oil and solvent resistant handle provides a longer tool life
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.600





| Article Code | Size | Shank Length (mm) | Overall Length (mm) | Handle Diameter (mm) | |
|--------------|-------------|-------------------|---------------------|----------------------|---|
| ST66202SC | #2 x 6.0 mm | 38.0 | 98.0 | 37.0 | 6 |
| ST66203SC | #1 x 5.0 mm | 100.0 | 220.0 | 35.0 | 6 |
| ST66204SC | #2 x 6.0 mm | 100.0 | 220.0 | 35.0 | 6 |
| ST66205SC | #1 x 5.0 mm | 150.0 | 270.0 | 35.0 | 6 |
| ST66206SC | #2 x 6.0 mm | 150.0 | 270.0 | 35.0 | 6 |

Dual Material Soft Grip Go-Through Screwdriver Slotted

- Blade is made of high performance alloy steel for maximum strength and durability
- Through-metal shaft and cap for striking
- High-impact, dual material soft grip handle presents an ergonomic and strong grip
- Sleek handle design for maximum power, user comfort, and greater access
- Oil and solvent resistant handle provides a longer tool life
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.600



| Article Code | Size (mm) | Shank Length (mm) | Overall Length (mm) | Handle Diameter (mm) | |
|--------------|-----------|-------------------|---------------------|----------------------|---|
| ST61603SC | 6.0 | 100.0 | 220.0 | 34.0 | 6 |
| ST61605SC | 6.0 | 150.0 | 269.0 | 34.0 | 6 |
| ST61606SC | 8.0 | 150.0 | 280.0 | 38.0 | 6 |
| ST61607SC | 8.0 | 200.0 | 330.0 | 38.0 | 6 |
| ST61608SC | 8.0 | 250.0 | 380.0 | 38.0 | 6 |

Dual Material Soft Grip Go-Through Screwdriver Phillips

- Blade is made of high performance alloy steel for maximum strength and durability
- Through-metal shaft and cap for striking
- · High-impact, dual material soft grip handle presents an ergonomic and strong grip
- Sleek handle design for maximum power, user comfort, and greater access
- Oil and solvent resistant handle provides a longer tool life
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.600



| Article Code | Size | Shank Length (mm) | Overall Length (mm) | Handle Diameter (mm) | |
|--------------|------|-------------------|---------------------|----------------------|---|
| ST61703SC | #2 | 100.0 | 220.0 | 34.0 | 6 |
| ST61705SC | #2 | 150.0 | 269.0 | 34.0 | 6 |
| ST61706SC | #3 | 150.0 | 280.0 | 38.0 | 6 |
| ST61707SC | #3 | 200.0 | 330.0 | 38.0 | 6 |
| ST61708SC | #3 | 250.0 | 380.0 | 38.0 | 6 |

5 Pc. T-Series VDE Insulated **Screwdriver Set**



| Article Code | Content | (|
|--------------|--|----------|
| ST09302U | 2 - VDE Insulated Screwdrivers Slotted 3.0 x 100 mm, 5.5 x 125 mm 2 - VDE Insulated Screwdrivers Phillips 1 x 80 mm, 2 x 100 mm 1 - Circuit Tester | 6 |





7 Pc. T-Series VDE Insulated Screwdriver Set



| Article Code | Content | |
|--------------|--|----|
| ST09303 | 3 - VDE Insulated Screwdrivers Phillips #0 x 60 mm, #1 x 80 mm, #2 x 100 mm 4 - VDE Insulated Screwdrivers Slotted 2.5 x 75 mm, 4. x 100 mm, 5.5 x 125 mm, 6.5 x 150 mm | 10 |



T-Series VDE Insulated Screwdrivers - Slotted

- VDE Certified
- For use in high voltage areas, up to 1000 V alternating current
- Blade is made of high performance alloy steel for maximum strength and durability
- High-impact, contoured handle presents an ergonomic and strong grip
- Sleek handle design for maximum power, user comfort, and greater access
- Oil and solvent resistant handle provides a longer tool life
- Handle designed with "through hole" for easy storage



DE 1000V

DE 1000V

| Article Code | Size (mm) | Shank Length (mm) | Overall Length (mm) | Handle Diameter (mm) | |
|--------------|-----------|-------------------|---------------------|----------------------|----|
| ST61321SC | 2.5 | 75.0 | 163.0 | 25.0 | 12 |
| ST61322SC | 3.0 | 100.0 | 187.0 | 25.0 | 12 |
| ST61323SC | 4.0 | 100.0 | 205.0 | 31.0 | 12 |
| ST61324SC | 5.5 | 125.0 | 245.0 | 35.0 | 12 |
| ST61325SC | 6.5 | 150.0 | 270.0 | 35.0 | 12 |

T-Series VDE Insulated Screwdrivers - Phillips

- VDE Certified
- For use in high voltage areas, up to 1000 V alternating current
- Blade is made of high performance alloy steel for maximum strength and durability
- High-impact, contoured handle presents an ergonomic and strong grip
- Sleek handle design for maximum power, user comfort, and greater access
- Oil and solvent resistant handle provides a longer tool life
- Handle designed with "through hole" for easy storage



| Article Code | Size | Shank Length (mm) | Overall Length (mm) | Handle Diameter (mm) | |
|--------------|------|-------------------|---------------------|----------------------|----|
| ST61221SC | #0 | 60.0 | 147.0 | 25.0 | 12 |
| ST61222SC | #1 | 80.0 | 188.0 | 31.0 | 12 |
| ST61223SC | #2 | 100.0 | 220.0 | 35.0 | 12 |
| ST61224SC | #3 | 150.0 | 280.0 | 38.0 | 6 |

G-Series VDE Insulated Screwdrivers - Slotted

- VDE Certified
- For use in high voltage areas, up to 1000 V alternating current
- Blade is made of high performance alloy steel for maximum strength and durability
- High-impact, contoured handle presents an ergonomic and strong grip
- Sleek handle design for maximum power, user comfort, and greater access
- Oil and solvent resistant handle provides a longer tool life
 - Handle designed with "through hole" for easy storage
 - Made in Germany



| Article Code | Size (mm) | Shank Length (mm) | Overall Length (mm) | Handle Diameter (mm) | |
|--------------|-----------|-------------------|---------------------|----------------------|---|
| ST61311SC | 2.5 | 75.0 | 163.0 | 25.0 | 6 |
| ST61312SC | 3.0 | 100.0 | 188.0 | 25.0 | 6 |
| ST61313SC | 4.0 | 100.0 | 208.0 | 25.0 | 6 |
| ST61314SC | 5.5 | 125.0 | 233.0 | 34.0 | 6 |
| ST61315SC | 6.5 | 150.0 | 258.0 | 34.0 | 6 |

G-Series VDE Insulated Screwdrivers - Phillips

- VDE Certified
- For use in high voltage areas, up to 1000 V alternating current
- Blade is made of high performance alloy steel for maximum strength and durability
- High-impact, contoured handle presents an ergonomic and strong grip
- Sleek handle design for maximum power, user comfort, and greater access
- Oil and solvent resistant handle provides a longer tool life
- Handle designed with "through hole" for easy storage
- Made in Germany



| Article Code | Size | Shank Length (mm) | Overall Length (mm) | Handle Diameter (mm) | |
|--------------|------|-------------------|---------------------|----------------------|---|
| ST61211SC | #0 | 60.0 | 148.0 | 25.0 | 6 |
| ST61212SC | #1 | 80.0 | 188.0 | 25.0 | 6 |
| ST61213SC | #2 | 100.0 | 208.0 | 34.0 | 6 |
| ST61214SC | #3 | 150.0 | 270.0 | 37.0 | 6 |









12 Screwdrivers & Nut Drivers

6-in-1 Interchangeable Screwdriver Set

| Article Code | Content | | Article Code | Content |
|--------------|--|---|--------------|--|
| ST09347 | Screwdriver handle (5/16" and 1/4" double ended shank) 75 mm double ended bits | 6 | ST09602SJ | Impact Screwdriver 1/2" Drive Bit Adapter 5/16" Shank 30L Bits Slotted 8.0, 10.0 mm; Phillips #2, #3 5/16" Shank 70L Bits Slotted 8.0 mm; Phillips #2 |

Nature of this product is subject to wear and tear upon usage. Not covered under Lifetime Warranty.

8 Pc. Impact Screwdriver Set





8 Pc. Impact Screwdriver Set

| Article Code | Content | | Ar |
|--------------|--|----|----|
| ST09603SJ | Protective Grip Impact Screwdriver 1/2" Drive Bit Adapter 5/16" Shank 30L Bits Slotted 8.0, 10.0 mm; Phillips #2, #3 5/16" Shank 70L Bits Slotted 8.0 mm; Phillips #2 | 12 | ST |

Nature of this product is subject to wear and tear upon usage. Not covered under Lifetime Warranty.



24 Pc. Ratcheting T-Handle Screwdriver Set

| | Article Code | Content | |
|----|--------------|---|---|
| 12 | ST09341SJ | T-Handle Ratcheting Screwdriver 1/4" x 1/4" Dr. Extension Bar 6" 1/4" x 1/4" Dr. Flex Extension Bar 6" 1/4" Dr. Bit Adapter Bits Phillips #0, #1, #2, #3 Slotted 3, 4, 5, 5.5, 6.5, 8 mm, T10, T15, T20, T25, Hex 2.5, 3, 4, 5, 6, 7 mm | 8 |

Please refer to the warranty terms of the individual product



25 Pc. Ratcheting Stubby Screwdriver Set

| Article Code | Content | | Article Code | Content | |
|--------------|--|---|--------------|--|---|
| ST09342SJ | Stubby Ratcheting Screwdriver Magnetic Bit Holder 3-1/2" 1/4" x 1/4" Dr. Extension Bar 3-1/2" 1/4" x 1/4" Dr. Flex Extension Bar 6" 1/4" Dr. Bit Adapter Bits Phillips #0, #1, #2, #3, Slotted 3, 4, 5, 5.5, 6.5, 8 mm, T10, T15, T20, T25, Hex 2.5, 3, 4, 5, 6, 7 mm | 8 | ST09343SJ | 1 - Standard Ratcheting Screwdriver 3 - 1/4" x 1/4" Dr. Extension Bars 3-1/2", 6", 10" 1 - 1/4" x 1/4" Dr. Flex Extension 6" 1 - 1/4" Dr. Bit Adapter 20 - Bits Phillips #0, #1, #2, #3, Slotted 3, 4, 5, 5.5, 6.5, 8 mm, T10, T15, T20, T25, Hex 2.5, 3, 4, 5, 6, 7 mm | 6 |

Please refer to the warranty terms of the individual product



6 Pc. Stubby Ratcheting Screwdriver Set

| Article Code | Content | | Article Code | Content | (|
|--------------|---|---|--------------|--|----------|
| ST09348 | 1 - Stubby Ratcheting Screwdriver 6 - Bits Phillips #1, #2, #3, Slotted 4.0, 5.0, 6.0 mm | 6 | ST09350 | 1 - Ratcheting Screwdriver 8 - Double-sided Bits Phillips #1, #2, #3 Slotted 5.0, 6.0, 8.0 mm Torx T15, T20, T25, T20 Hex 2.0, 2.5, 3.0, 4.0, 5.0, 6.0 mm | 10 |



26 Pc. Ratcheting Screwdriver Set

Please refer to the warranty terms of the individual product



19-in-1 Multipurpose Ratcheting Screwdriver Set



217

60 PC. & 80 PC. ST09324SJ ST09326SJ **RATCHETING BIT DRIVER SET**

high performance reversible alloy steel locking pos

Designed with ratcheting

function



Magnetic bit holder





locking position



Ergonomic dual material



Comes with a durable blow mold case

1111 1.1.1 the second

60 Pc. 1/4" Drive 6 Point Metric Socket and Ratcheting Bit Driver Set

| Article Code | Content | |
|--------------|--|---|
| ST09324SJ | Ratcheting Bit Driver Action Provided Heat State Sta | 6 |

80 Pc. Ratcheting Bit Driver Set

| Article Code | Content | |
|--------------|--|----|
| ST09326SJ | Ratcheting Bit Driver 25L Bits Phillips #0, #1, #2[2x], #3 Slotted 3, 4, 5, 55, 6, 65 mm Hex 2, 2.5, 3, 4, 5, 6 mm Torx® T8, T10, T15, T20, T25, T27, T30, T40 Tamper-Proof Torx® T8, T10, T15, T20, T25, T27, T30, T40 32 - 50L Bits Phillips #0, #1, #2, #3 Slotted 3, 4, 5, 55, 6, 6.5 mm Hex 2, 2.5, 3, 4, 5, 6, 6.5 mm Hex 2, 2.5, 3, 4, 5, 6, 6.5 mm Hex 2, 2.5, 3, 4, 5, 6, 6.5 mm Torx® T8, T10, T15, T20, T25, T27, T30, T40 Tamper-Proof Torx® T8, T10, T15, T20, T25, T27, T30, T40 Tamper-Proof Torx® T8, T10, T15, T20, T25, T27, T30, T40 8 - 65L Double End Bits PH1-PH1, PH2-PH2, PH3-PH3, 4.5 mm-PH1, 5.5 mm-PH2, 6.5 mm-PH3, PH1-PH2, PH2-PH3 110L Double End Bits PH1-PH1, PH2-PH2, PH3-PH3 Accessories 25 L Socket Bit Adapter E04 Adapter E04 Adapter E04 Adapter | 12 |
| | 50 L Socket Bit Adapter Magnetic Bit Holder 60 mm | |







6 Pc. Mini Screwdriver Set

| Article Code | Content | | |
|--------------|--|----|--|
| ST03141ST | 3 - Phillips #00, #0, #1 3 - Slotted 1.6 mm, 2.0 mm, 2.4 mm | 10 | |

6 Pc. Mini Screwdriver Set

| Article Code | Content | \$ |
|--------------|--|-----------|
| ST03142 | 2 - Phillips #00, #0 4 - TORX® T5, T6, T7, T8 | 10 |





7 Pc. Precision Combination Screwdriver Set

| Article Code | Content | | Article Code | Content | |
|--------------|--|---|--------------|---|---|
| ST09314SJ | 3 - Phillips #000x40 mm, #00x50 mm, #0x50 mm 4 - Slotted 14x50 mm, 2.0x50 mm, 2.4x50 mm, 3.0x50 mm | 6 | ST09316SJ | 4 - Phillips #000x40 mm, #00x75 mm, #0x75 mm, #1x100 mm 5 - Slotted 1.0x40 mm, 2.0x50 mm, 2.4x75 mm, 3.0x75 mm, 4.0x100 mm | 6 |



15 Pc. Precision Combination Screwdriver Set

| Article Code | Content | | Article Code | Content | |
|--------------|---|---|--------------|---|---|
| ST09317SJ | Phillips #000x40 mm, #00x50 mm, #0x50 mm Slotted 1.0x40 mm, 2.0x50 mm, 3.0x50 mm, 3.5x50 mm Torx T6x50 mm, T8x50 mm, T10x50 mm, T15x50 mm Hex 1.5x50 mm, 2.0x50 mm, 2.5x50 mm, 3.0x50 mm | 6 | ST09313SJ | 6 - TORX® T6x50 mm, T7x50 mm, T8x50 mm, T9x50 mm ,T10x50 mm, T15x50 mm | 6 |



6 Pc. Precision Slotted Screwdriver Set

| Article Code | Content | | A |
|--------------|--|---|---|
| ST09311SJ | 6 - Slotted 1.0x40 mm, 1.4x50 mm, 2.0x50 mm, 2.4x50 mm, 3.0x50 mm, 3.5x50 mm | 6 | S |

| Article Code | Content | |
|--------------|--|---|
| ST09312SJ | 2 - Phillips #0x50 mm, #00x50 mm 4 - Slotted 14x50 mm, 2.0x50 mm, 2.4x50 mm, 3.0x50 mm | 6 |

6 Pc. Precision Combination

Screwdriver Set





9 Pc. Precision Combination Screwdriver Set



6 Pc. Precision Torx Screwdriver Set



7 Pc. Precision Torx Screwdriver Set 31 Pc. 1/4" Drive Bit Set

| Article Code | Content | | Article Code | Content |
|--------------|---|---|--------------|--|
| ST09315SJ | 7 - TORX® T5x50 mm, T6x50 mm, T7x50 mm, T8x50 mm, T9x50 mm, T10x50 mm, T15x50 mm | 6 | ST09332SJ | 1 - Magnet 30 - 1/4" Sha Slotted Phillins |





6

31 Pc. 1/4" Drive Bit Set

| Article Code | Content | |
|--------------|---|---|
| ST09333SJ | 1 - Magnetic Quick-Change Bit Holder 30 - 1/4" Shank 25L Bits Slotted 4, 5.5, 6, 6.5 mm Phillips #0, #1, #2, #3 Hex 3, 4, 5, 6, 7, 8 mm Torx® T8, T10, T15, T20, T25, T30, T40 Tamper-Proof Torx® T10, T15, T20, T25, T30, T40 Pozidriv #1, #2, #3 | 6 |

Please refer to the warranty terms of the individual product



31 PC. 1/4" DRIVE BIT SET







30 precision bits Precison

engineered

Heat treated



ST09332SJ ST09333SJ









Full polish chrome finish



Bits are made of high performance alloy steel



1/4" Drive Magnetic Bit Holder

- Magnetic, easy to operate
- Manufactured from S2 steel for maximum strength and durability
- 3 Pc. display packed



Excluded from Lifetime Warranty terms

| Article Code | Size | Overall Length (mm) | |
|--------------|------|---------------------|----|
| ST59273ST | 1/4" | 60.0 | 12 |

1/4" Drive Magnetic Quick-Change Bit Holder

- Magnetic, easy to operate
- One-hand operation for faster bit changes
- Manufactured from S2 steel for maximum strength and durability
- For use with impact drivers



Excluded from Lifetime Warranty terms

| Article Code | Size | Overall Length (mm) | |
|--------------|------|---------------------|---|
| ST59274 | 1/4" | 64.0 | 6 |

1/4" Drive Socket Bit Adapter

Manufactured from S2 steel for maximum strength and durability

• 5 Pc. display packed





Excluded from Lifetime Warranty terms

| Article Code | Size | Overall Length (mm) | \$ |
|--------------|------|---------------------|-----------|
| ST59271ST | 1/4" | 25.0 | 12 |
| ST59272ST | 1/4" | 50.0 | 12 |

1/4" Dr. 25L Bit Phillips

- Precison engineered bits for a better fit on fasteners
- Heat treated for long lasting durability
- S2 steel insert bits offer maximum strength and durability
- 5 Pc. display packed
- Meets or exceeds ASME B107.600

Excluded from Lifetime Warranty terms

| Article Code | Size | Overall Length (mm) | \$ |
|--------------|------|---------------------|-----------|
| SC59221 | #0 | 25.0 | 12 |
| SC59222 | #1 | 25.0 | 12 |
| SC59223 | #2 | 25.0 | 12 |
| SC59224 | #3 | 25.0 | 12 |

1/4" Dr. 25L Bit Pozidriv

- Precison engineered bits for a better fit on fasteners
- Heat treated for long lasting durability
- S2 steel insert bits offer maximum strength and durability
- 5 Pc. display packed
- Meets or exceeds ASME B107.600

Excluded from Lifetime Warranty terms

| Article Code | Size | Overall Length (mm) | \$ |
|--------------|------|---------------------|-----------|
| SC59261 | #1 | 25.0 | 12 |
| SC59262 | #2 | 25.0 | 12 |
| SC59263 | #3 | 25.0 | 12 |

1/4" Drive 25L Bit Slotted

- Precison engineered bits for a better fit on fasteners
- Heat treated for long lasting durability
- S2 steel insert bits offer maximum strength and durability
- 5 Pc. display packed
- Meets or exceeds ASME B107.600



Excluded from Lifetime Warranty terms

| Article Code | Size (mm) | Overall Length (mm) | |
|--------------|-----------|---------------------|----|
| SC59211 | 3.0 | 25.0 | 12 |
| SC59213 | 4.0 | 25.0 | 12 |
| SC59215 | 5.0 | 25.0 | 12 |
| SC59216 | 5.5 | 25.0 | 12 |
| SC59217 | 6.0 | 25.0 | 12 |
| SC59218 | 6.5 | 25.0 | 12 |







1/4" Drive 25L Bit Torx

- Precison engineered bits for a better fit on fasteners
- Heat treated for long lasting durability
- S2 steel insert bits offer maximum strength and durability
- 5 Pc. display packed
- Meets or exceeds Camcar TXF-702



Excluded from Lifetime Warranty terms

| Article Code | Size | Overall Length (mm) | (|
|--------------|------|---------------------|----------|
| SC59231 | T8 | 25.0 | 12 |
| SC59232 | T10 | 25.0 | 12 |
| SC59233 | T15 | 25.0 | 12 |
| SC59234 | T20 | 25.0 | 12 |
| SC59235 | T25 | 25.0 | 12 |
| SC59236 | T27 | 25.0 | 12 |
| SC59237 | Т30 | 25.0 | 12 |
| SC59238 | T40 | 25.0 | 12 |

1/4" Drive 25L Bit Hex

- Precison engineered bits for a better fit on fasteners
- Heat treated for long lasting durability
- S2 steel insert bits offer maximum strength and durability
- 5 Pc. display packed
- Meets or exceeds ASME B18.3.2M



Excluded from Lifetime Warranty terms

| Article Code | Size (mm) | Overall Length (mm) | (|
|--------------|-----------|---------------------|----------|
| SC59251 | 2.0 | 25.0 | 12 |
| SC59253 | 3.0 | 25.0 | 12 |
| SC59254 | 4.0 | 25.0 | 12 |
| SC59255 | 5.0 | 25.0 | 12 |
| SC59256 | 6.0 | 25.0 | 12 |
| SC59257 | 7.0 | 25.0 | 12 |
| SC59258 | 8.0 | 25.0 | 12 |

5/16" Drive 30L Bit Slotted

- Precison engineered bits for a better fit on fasteners
- Heat treated for long lasting durability
- S2 steel insert bits offer maximum strength and durability
- 5 Pc. display packed
- Meets or exceeds ASME B18.3.2M

Excluded from Lifetime Warranty terms

| Article Code | Size (mm) | Overall Length (mm) | \$ |
|--------------|-----------|---------------------|-----------|
| SC59415 | 8.0 | 30.0 | 12 |
| SC59416 | 10.0 | 30.0 | 12 |
| SC59417 | 12.0 | 30.0 | 12 |

5/16" Drive 30L Bit Philips

- Precison engineered bits for a better fit on fasteners
- Heat treated for long lasting durability
- S2 steel insert bits offer maximum strength and durability
- 5 Pc. display packed
- Meets or exceeds ASME B18.3.2M

| | Excluded from Lifetime Warranty terms |
|--|---------------------------------------|
|--|---------------------------------------|

| Article Code | Size | Overall Length (mm) | |
|--------------|------|---------------------|----|
| SC59421 | #1 | 30.0 | 12 |
| SC59422 | #2 | 30.0 | 12 |
| SC59423 | #3 | 30.0 | 12 |
| SC59424 | #4 | 30.0 | 12 |

5/16" Drive 30L Bit Hex

- Precison engineered bits for a better fit on fasteners
- Heat treated for long lasting durability
- S2 steel insert bits offer maximum strength and durability
- 5 Pc. display packed
- Meets or exceeds ASME B18.3.2M

| | Excluded | from | Lifetime | Warranty | terms |
|--|----------|------|----------|----------|-------|
|--|----------|------|----------|----------|-------|

| Article Code | Size (mm) | Overall Length (mm) | \$ |
|--------------|-----------|---------------------|-----------|
| SC59471 | 4.0 | 30.0 | 12 |
| SC59472 | 5.0 | 30.0 | 12 |
| SC59473 | 6.0 | 30.0 | 12 |
| SC59474 | 8.0 | 30.0 | 12 |
| SC59475 | 10.0 | 30.0 | 12 |
| SC59476 | 12.0 | 30.0 | 12 |









¹³ Hex Keys

9 Pc. Metric Extra Long Ball Point Hex Key and Torque Handle Set 6

| Article Code C | | Content |
|----------------|-----------|-----------------------------------|
| | ST09124SJ | 1.5, 2, 2.5, 3, 4, 5, 6, 8, 10 mm |





9 PC. METRIC EXTRASTO9124SJ LONG BALL POINT HEX KEY AND TORQUE HANDLE SET



Up to 30% longer Angled access



to fasteners



Precise fit



Easy to read size markings





High-torque Impact resistant handle caddy

METRIC

METRIC

SATA° LIFETIME WARRANTY



9 Pc. Metric Extra Long Ball Point Hex Key Set

| Article Code | Content | | Article Code | Content | |
|--------------|-----------------------------------|---|--------------|--|---|
| ST09101ASJ | 1.5, 2, 2.5, 3, 4, 5, 6, 8, 10 mm | 6 | ST09102SJ | 1/16, 5/64, 3/32, 7/64, 1/8, 9/64, 5/32, 3/16, 7/32, 1/4, 5/16, 3/8" | 6 |



Extra Long Ball Point Hex Key

- Up to 30% longer for improved access and leverage
- Ball point keys allow for angled access to fasteners
- Precise fit for a solid grip and chamfered tips for faster insertion
- Easy to read size markings
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B18.3.2M

| Article Code | Size (mm) | Long End Length (mm) | Short End Length (mm) | |
|--------------|-----------|----------------------|-----------------------|----|
| SC80104 | 1.5 | 89.0 | 13.0 | 72 |
| SC80105 | 2.0 | 99.0 | 13.5 | 72 |
| SC80106A | 2.5 | 111.0 | 17.0 | 72 |
| SC80107A | 3.0 | 125.0 | 19.0 | 36 |
| SC80108A | 4.0 | 139.0 | 24.0 | 36 |
| SC80110A | 5.0 | 159.0 | 27.0 | 36 |
| SC80112A | 6.0 | 179.0 | 31.0 | 36 |
| SC80114A | 8.0 | 199.0 | 35.0 | 18 |
| SC80116A | 10.0 | 223.0 | 39.0 | 18 |

12 Pc. SAE Extra Long Ball Point Hex Key Set





9 Pc. Metric Extra Long Hex Key Set 12 Pc. SAE Extra Long Hex Key Set

| Article Code | Content | | Article Co |
|--------------|-----------------------------------|---|------------|
| ST09103ASJ | 1.5, 2, 2.5, 3, 4, 5, 6, 8, 10 mm | 6 | ST09104SJ |

| cle Code | Content | |
|----------|---|---|
| 9104SJ | 1/16, 5/64, 3/32, 7/64, 1/8, 9/64, 5/32, 3/16, 7/32, 1/4, 5/16, 3/8" | 6 |





Extra Long Hex Key

- Up to 30% longer for improved access and leverage
- Precise fit for a solid grip and chamfered tips for faster insertion
- Easy to read size markings
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B18.3.2M

| Article Code | Size (mm) | Long End Length (mm) | Short End Length (mm) | |
|--------------|-----------|----------------------|-----------------------|----|
| SC80304 | 1.5 | 89.0 | 13.0 | 72 |
| SC80305 | 2.0 | 99.0 | 13.5 | 72 |
| SC80306 | 2.5 | 111.0 | 17.0 | 72 |
| SC80307 | 3.0 | 125.0 | 19.0 | 36 |
| SC80308 | 4.0 | 139.0 | 24.0 | 36 |
| SC80310 | 5.0 | 159.0 | 27.0 | 36 |
| SC80312 | 6.0 | 179.0 | 31.0 | 36 |
| SC80314 | 8.0 | 199.0 | 35.0 | 18 |
| SC80316 | 10.0 | 223.0 | 39.0 | 18 |

9 Pc. Metric Long Ball Point Hex Key Set

| Article Code | Content | \$ | Article Code | Content | |
|--------------|-----------------------------------|-----------|--------------|--|---|
| ST09105ASJ | 1.5, 2, 2.5, 3, 4, 5, 6, 8, 10 mm | 6 | ST09106SJ | 1/16, 5/64, 3/32, 7/64, 1/8, 9/64, 5/32, 3/16, 7/32, 1/4, 5/16, 3/8" | 6 |



Long Ball Point Hex Key

- Ball point keys allow for angled access to fasteners
- Precise fit for a solid grip and chamfered tips for faster insertion
- Easy to read size markings
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B18.3.2M

| Article Code | Size (mm) | Long End Length (mm) | Short End Length (mm) | |
|--------------|-----------|----------------------|-----------------------|----|
| SC81104 | 1.5 | 77.0 | 13.5 | 72 |
| SC81105 | 2.0 | 82.0 | 15.5 | 72 |
| SC81106A | 2.5 | 88.5 | 17.5 | 72 |
| SC81107A | 3.0 | 98.5 | 19.0 | 36 |
| SC81108 | 4.0 | 104.0 | 24.0 | 36 |
| SC81110A | 5.0 | 116.0 | 27.0 | 36 |
| SC81111 | 5.5 | 126.5 | 29.0 | 36 |
| SC81112A | 6.0 | 138.0 | 31.0 | 36 |
| SC81113A | 7.0 | 148.0 | 33.0 | 36 |
| SC81114A | 8.0 | 175.5 | 35.0 | 18 |
| SC81116A | 10.0 | 167.0 | 39.0 | 18 |

12 Pc. SAE Long Ball Point Hex Key Set





9 Pc. Metric Long Hex Key Set

| Article Code | Content | | Art |
|--------------|-----------------------------------|---|-----|
| ST09107ASJ | 1.5, 2, 2.5, 3, 4, 5, 6, 8, 10 mm | 6 | STO |

| Article Code | Content | |
|--------------|--|---|
| ST09108SJ | 1/16, 5/64, 3/32, 7/64, 1/8, 9/64, 5/32, 3/16, 7/32, 1/4, 5/16, 3/8" | 6 |

12 Pc. SAE Long Hex Key Set





Long Hex Key

- Precise fit for a solid grip and chamfered tips for faster insertion
- Easy to read size markings
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B18.3.2M

| | | 1 |
|--|--|---|
| | | |
| | | |
| | | |
| | | |
| | | |

| Article Code | Size (mm) | Long End Length (mm) | Short End Length (mm) | |
|--------------|-----------|----------------------|-----------------------|----|
| SC81304 | 1.5 | 77.0 | 13.5 | 72 |
| SC81305 | 2.0 | 82.0 | 15.5 | 72 |
| SC81306 | 2.5 | 88.5 | 17.5 | 72 |
| SC81307 | 3.0 | 98.5 | 19.0 | 36 |
| SC81308A | 4.0 | 104.0 | 24.0 | 36 |
| SC81310 | 5.0 | 116.0 | 27.0 | 36 |
| SC81312 | 6.0 | 138.0 | 31.0 | 36 |
| SC81314 | 8.0 | 157.5 | 35.0 | 18 |
| SC81316 | 10.0 | 167.0 | 39.0 | 18 |

8 Pc. Metric Hex Key Fold-Up Set

9 Pc. SAE Hex Key Fold-Up Set

| Article Code | Content | | Article Code | Content | |
|--------------|----------------------------------|----|--------------|---|----|
| ST09121SJ | 1.5, 2, 2.5, 3, 4, 5, 6, 8 mm | 12 | ST09122SJ | 5/64, 3/32, 7/64, 1/8, 9/64, 5/32, 3/16, 7/32, 1/4" | 12 |



T-Handle Ball Point Hex Key

- Ball point keys allow for angled access to fasteners
- Precise fit for a solid grip and chamfered tips for faster insertion
- Easy to read size markings
- Ergonomic non-slip grip delivers superior strength and ultimate comfort in use
- Key made of shock resisted steel (SVCM+) material to provide 30% more torque than Chrome vanadium alloy steel (Cr-V)
- Meets or exceeds ASME B18.3.2M

| Article Code | Size (mm) | Handle Length (mm) | Overall Length (mm) | |
|--------------|-----------|--------------------|---------------------|---|
| ST83105SC | 2.0 | 61.5 | 129.0 | 6 |
| ST83106SC | 2.5 | 61.5 | 129.0 | 6 |
| ST83107SC | 3.0 | 61.0 | 128.5 | 6 |
| ST83108SC | 4.0 | 60.5 | 178.0 | 6 |
| ST83110SC | 5.0 | 64.0 | 178.0 | 6 |
| ST83112SC | 6.0 | 88.0 | 192.0 | 6 |
| ST83113SC | 7.0 | 87.5 | 241.5 | 6 |
| ST83114SC | 8.0 | 87.5 | 241.5 | 6 |
| ST83116SC | 10.0 | 91.0 | 241.5 | 6 |

HEX KEYS

8 Pc. Torx[®] Key Fold-Up Set

| Article Code | Content | (|
|--------------|--|----------|
| ST09123SJ | T9, T10, T15, T20, T25, T27, T30, T40 | 12 |



13 Hex Keys

T-Handle Hex Key

- Precise fit for a solid grip and chamfered tips for faster insertion
- Easy to read size markings
- Ergonomic non-slip grip delivers superior strength and ultimate comfort in use
- Key made of shock resisted steel (SVCM+) material to provide 30% more torgue than Chrome vanadium alloy steel (Cr-V)
- Meets or exceeds ASME B18.3.2M

| Article Code | Size (mm) | Handle Length (mm) | Overall Length (mm) | |
|--------------|-----------|--------------------|---------------------|---|
| ST83305SC | 2.0 | 61.5 | 129.0 | 6 |
| ST83306SC | 2.5 | 61.5 | 129.0 | 6 |
| ST83307SC | 3.0 | 61.5 | 129.0 | 6 |
| ST83308SC | 4.0 | 60.5 | 178.0 | 6 |
| ST83310SC | 5.0 | 64.0 | 178.0 | 6 |
| ST83312SC | 6.0 | 88.0 | 192.0 | 6 |
| ST83313SC | 7.0 | 87.5 | 241.5 | 6 |
| ST83314SC | 8.0 | 87.5 | 241.5 | 6 |
| ST83316SC | 10.0 | 91.0 | 241.5 | 6 |

9 Pc. Ball Point Color Series **Black Oxide Hex Key Set**

ST09101CHBSJ 1.5, 2, 2.5, 3, 4, 5, 6, 8, 10 mm

Article Code Content

9 Pc. Extra Long Color Series Black Oxide Hex Key Set

| | Article Code | Content | |
|---|--------------|-----------------------------------|---|
| 6 | ST09107CHBSJ | 1.5, 2, 2.5, 3, 4, 5, 6, 8, 10 mm | 6 |



9 PC. BALL POINT & EXTRA LONG COLOR SERIES BLACK OXIDE HEX KEY SET







Precise fit

Color-coded sleeves

Angled access to fasteners









Up to 30% longer

Black oxide finish



Impact resistant caddy

METRIC



Metric/SAE Black Oxide Hex Key Set Torx[®] Key Set

| Article Code | Content | |
|--------------|--|---|
| ST09120SJ | 13 - Long Hex Keys 0.05, 1/16", 5/64", 3/32", 7/64", 1/8", 9/64", 5/32", 3/16", 7/32", 1/4", 5/16", 3/8" 12 - Short Hex Keys 0.7, 0.9, 1.3, 1.5, 2, 2.5, 3, 4, 5, 6, 8, 10 mm | 6 |

8 Pc. Tamper-Proof

| Article Code | Content | \$ |
|--------------|------------------------------------|-----------|
| ST09701 | T6, T7, T8, T9, T10, T15, T20, T25 | 12 |



Black Oxide Hex Key

- Precise fit for a solid grip and chamfered tips for faster insertion
- Easy to read size markings
- Black oxide finish to resist corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B18.3.2M



| Article Code | Size (mm) | Long End Length (mm) | Short End Length (mm) | |
|--------------|-----------|----------------------|-----------------------|----|
| ST84318SC | 12.0 | 209.0 | 44.0 | 10 |
| ST84320SC | 14.0 | 232.5 | 54.5 | 10 |
| SC84321 | 16.0 | 239.5 | 58.5 | 12 |
| ST84323SC | 17.0 | 261.0 | 64.5 | 10 |
| SC84322 | 18.0 | 246.0 | 61.5 | 12 |
| ST84325SC | 19.0 | 275.5 | 68.5 | 10 |
| ST84328 | 22.0 | 330.0 | 78.0 | 10 |
| SC84324 | 24.0 | 369.5 | 88.0 | 10 |
| SC84329 | 27.0 | 410.0 | 97.5.0 | 6 |

9 Pc. Tamper-Proof Torx[®] Key Set

| Article Code | Content | | Article Code | Content | |
|--------------|--|---|--------------|--|---|
| ST09702 | T10, T15, T20, T25, T27, T30,T40, T45, T50 | 6 | ST09715 | T10, T15, T20, T25, T27,T30, T40, T45, T50 | 6 |



Tamper-Proof Torx[®] Key

- Precise fit for a solid grip and chamfered tips for faster insertion
- Easy to read size markings
- Chrome plated finish to resist corrosion
- Manufactured from S2 steel for maximum strength and durability
- Meets or exceeds Camcar TXF-703

| Article Code | Size | Long End Length (mm) | Short End Length (mm) | |
|--------------|------|----------------------|-----------------------|----|
| SC84501 | T6 | 70.0 | 13.0 | 72 |
| SC84502 | T7 | 74.0 | 14.0 | 72 |
| SC84503 | T8 | 78.0 | 15.0 | 72 |
| SC84504 | T9 | 82.0 | 16.0 | 72 |
| SC84505 | T10 | 86.0 | 17.0 | 72 |
| SC84506 | T15 | 90.0 | 18.0 | 72 |
| SC84507 | T20 | 95.0 | 19.0 | 72 |
| SC84508 | T25 | 100.0 | 20.0 | 72 |
| SC84509 | T27 | 105.0 | 21.0 | 72 |
| SC84510 | T30 | 114.0 | 24.0 | 72 |
| SC84511 | T40 | 124.0 | 26.0 | 72 |
| SC84512 | T45 | 133.0 | 29.0 | 36 |
| SC84513 | T50 | 152.0 | 32.0 | 36 |
| SC84514 | T55 | 162.0 | 34.0 | 36 |

9 Pc. Long Ball Point Tamper-Proof Torx[®] Key Set



¹⁴ Striking & Struck

CRV 4mr

5 Pc. Punch Set

| Article Code | Content | \$ | Article Code | Content | (|
|--------------|--|-----------|--------------|----------------------|----------|
| ST09161SJ | 1 - Center Punch 4 mm 1 - Drift Punch 3 mm 1 - Pin Punch 4 mm 1 - Cape Chisel 5 mm 1 - Flat Chisel 12 mm | 20 | ST09162SJ | 2 , 3, 4, 5, 6, 8 mm | 6 |



3 Pc. Chisel Set

| Article Code | Content | | Article Code | Content | |
|--------------|---------------|---|--------------|---|---|
| ST09163SJ | 20, 22, 25 mm | 4 | ST09164SJ | 2 - Center Punches 4, 5 mm 1 - Drift Punch 3 mm 6 - Pin Punches 2, 3, 4, 5, 6, 8 mm 1 - Cape Chisel 5 mm 3 - Flat Chisels 12, 15, 18 mm | 4 |



STRIKING & STRUCK

6 Pc. Pin Punch Set



13 Pc. Punch and Chisel Set



14 Striking & Struck

Center Punch

- Single piece forged steel for maximum strengt
- Chrome plated finish to resist corrosion
- Heat treated for long lasting durability
- Bright, full polish chrome finish easily wipes clean
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.410

| Article Code | Size (mm) | Tapping Surface Outside Diameter (mm) | Overall Length (mm) | |
|--------------|-----------|---------------------------------------|---------------------|----|
| SC90751 | 4.0 | 8.0 | 120.0 | 10 |
| ST90762SC | 5.0 | 10.0 | 150.0 | 10 |

Pin Punch

- Single piece forged steel for maximum strength
- Chrome plated finish to resist corrosion
- Heat treated for long lasting durability
- Bright, full polish chrome finish easily wipes clean
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.410

| Article Code | Size (mm) | Tapping Surface Outside Diameter (mm) | Overall Length (mm) | |
|--------------|-----------|---------------------------------------|---------------------|----|
| SC90771 | 2.0 | 8.0 | 150.0 | 10 |
| ST90772SC | 3.0 | 8.0 | 150.0 | 10 |
| SC90753 | 4.0 | 8.0 | 150.0 | 10 |
| SC90774 | 5.0 | 8.0 | 150.0 | 10 |
| SC90775 | 6.0 | 10.0 | 150.0 | 10 |
| SC90776 | 8.0 | 10.0 | 150.0 | 10 |

Cold Chisel

- Single piece forged steel for maximum strength
- Chrome plated finish (SC90782 & SC90783) and powder coating (SC90784, SC90785 & SC 90786) to resist corrosion
- Heat treated for long lasting durability
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.410



| Article Code | Size (mm) | Tapping Surface Outside Diameter (mm) | Overall Length (mm) | |
|--------------|-----------|---------------------------------------|---------------------|----|
| SC90782 | 15.0 | 10.0 | 150.0 | 10 |
| SC90783 | 18.0 | 12.0 | 175.0 | 10 |
| SC90784 | 20.0 | 14.0 | 200.0 | 6 |
| SC90785 | 22.0 | 18.0 | 250.0 | 6 |
| ST90786SC | 25.0 | 20.0 | 300.0 | 4 |

SC90782

SC90783

Hammers

- Durable hickory handle provides comfortable grip
- Unique embedding process to prevent hammer head from easily falling off
- Forging hammer head with quenching treatment to prevent easy broken
- Meets or exceeds ASME B107.410

Standard Bumping Hammer



Light Shrinking Hammer



| Article Code | Head Weight (g) | Head Length (mm) | Overall Length (mm) | (| Article Code | Head Weight (g) | Head Length (mm) | Overall Length (mm) | (|
|--------------|--------------------|---------------------|------------------------|----------|--------------|--------------------|---------------------|------------------------|----------|
| ST92104SC | 320.0 | 97.0 | 330.0 | 6 | ST92103SC | 305.0 | 140.0 | 330.0 | 6 |

Straight Pein and Finishing Hammer



Heavy Shrinking Hammer

| Article Code | Head Weight (g) | Head Length (mm) | Overall Length (mm) | (|
|--------------|--------------------|---------------------|------------------------|----------|
| ST92102SC | 390.0 | 97.0 | 330.0 | 6 |

Curved Pein and Finishing Hammer



Pick and Finishing Hammer



| Article Code | Head Weight (g) | Head Length (mm) | Overall Length (mm) | |
|--------------|--------------------|---------------------|------------------------|---|
| ST92106SC | 260.0 | 137.0 | 330.0 | 6 |

Hickory Ball Pein Hammer

- Maximum-strength head and claw forged of carbon steel, finished with a corrosion and rust resistant clear coat
- Hammer head with polished poles and peins
- Hickory handle is flame treated, clear lacquered, and securely wedged into the hammer's head
- Durable hickory handle provides comfortable grip
- Meets or exceeds ASME B107.410



| Article Code | Head Weight (g) | Head Weight (oz) | Overall Length (mm) | \$ |
|--------------|-----------------|------------------|---------------------|-----------|
| ST92312SC | 454.0 | 16.0 | 350.0 | 6 |
| ST92313SC | 680.0 | 24.0 | 360.0 | 4 |
| ST92314SC | 910.0 | 32.0 | 390.0 | 6 |
| ST92315 | 1134.0 | 40.0 | 400.0 | 4 |

Fiberglass Ball Pein Hammer

- Maximum-strength head and claw forged of carbon steel, finished with a corrosion and rust resistant clear coat
- Hammer head with polished poles and peins
- Unique embedded construction securely attaches the head to the handle
- Fiberglass handle absorbs vibration of each strike for comfortable use
- Meets or exceeds ASME B107.410



| Article Code | Head Weight (g) | Head Weight (oz) | Overall Length (mm) | (|
|--------------|-----------------|------------------|---------------------|----------|
| ST92301 | 227.0 | 8.0 | 297.0 | 4 |
| ST92302SC | 454.0 | 16.0 | 343.0 | 2 |
| ST92303SC | 680.0 | 24.0 | 349.0 | 2 |
| ST92304SC | 910.0 | 32.0 | 351.0 | 2 |
| ST92305 | 1134.0 | 40.0 | 380.0 | 2 |

Hickory Claw Hammer

- Maximum-strength head and claw forged of carbon steel, finished with a corrosion and rust resistant clear coat
- Hammer head with polished poles and peins
- Balanced head for maximum striking power and control
- Hickory handle is flame treated, clear lacquered, and securely wedged into the hammer's head
- Durable hickory handle provides comfortable grip
- Rip claws designed for efficient prying and nail pulling
- Meets or exceeds ASME B107.410

| Article Code | Head Weight (g) | Head Weight (oz) | Overall Length (mm) | \$ |
|--------------|-----------------|------------------|---------------------|-----------|
| ST92322SC | 370.0 | 13.0 | 308.0 | 6 |
| ST92323SC | 454.0 | 16.0 | 330.0 | 6 |
| ST92324SC | 567.0 | 20.0 | 330.0 | 6 |

Fiberglass Claw Hammer

- Maximum-strength head and claw forged of carbon steel, finished with a corrosion and rust resistant clear coat
- Balanced head for maximum striking power and control
- Hammer head with polished poles and peins
- Fiberglass handle absorbs vibration of each strike for comfortable use
- Unique embedded construction securely attaches the head to the handle
- Rip claws designed for efficient prying and nail pulling
- Meets or exceeds ASME B107.410

| Article Code | Head Weight (g) | Head Weight (oz) | Overall Length (mm) | \$ |
|--------------|-----------------|------------------|---------------------|-----------|
| ST92308 | 227.0 | 8.0 | 280.0 | 4 |
| ST92306SC | 454.0 | 16.0 | 330.0 | 2 |
| ST92307SC | 680.0 | 24.0 | 380.0 | 2 |





Hickory Engineers Hammer

- Maximum-strength head and claw forged of carbon steel, finished with a corrosion and rust resistant clear coat
- Balanced head for maximum striking power and control
- Hickory handle is flame treated, clear lacquered, and securely wedged into the hammer's head
- Durable hickory handle provides comfortable grip
- Meets or exceeds ASME B107.410



| Article Code | Head Weight (g) | Head Weight (oz) | Overall Length (mm) | |
|--------------|-----------------|------------------|---------------------|---|
| ST92401SC | 200.0 | 7.0 | 285.0 | 4 |
| ST92402SC | 300.0 | 10.6 | 300.0 | 4 |
| ST92403SC | 400.0 | 14.1 | 320.0 | 4 |
| ST92404SC | 500.0 | 17.6 | 320.0 | 2 |
| ST92405SC | 800.0 | 28.2 | 350.0 | 2 |
| ST92406SC | 1000.0 | 35.5 | 360.0 | 2 |

Hickory Soft Face Hammer

- Non-sparking, non-marring soft face won't harm your target surface
- Aluminum center piece for better balance and lighter weight
- Balanced head for maximum striking power and control
- Hickory handle is flame treated, clear lacquered, and securely wedged into the hammer's head
- Durable hickory handle provides comfortable grip
- Meets or exceeds ASME B107.410



Plastic hammer head is not covered under Lifetime Warranty.

| Article Code | Head Weight (g) | Head Weight (oz) | Head Diameter (mm) | Overall Length (mm) | |
|--------------|-----------------|------------------|--------------------|---------------------|---|
| ST92501 | 160.0 | 5.6 | 22.0 | 260.0 | 6 |
| ST92502SC | 162.0 | 5.7 | 28.0 | 303.0 | 6 |
| ST92503SC | 308.0 | 10.9 | 35.0 | 320.0 | 6 |
| ST92504SC | 454.0 | 16.0 | 45.0 | 320.0 | 6 |
| ST92505 | 778.0 | 27.4 | 60.0 | 385.0 | 4 |

Soft Face Hammer Tip

- Ideal for various applications and use on a variety of surfaces and materials without marring and surface damage
- Hammer head hardness match material surface hardness can avoid surface abrasion and dents
- It will not be deformed, broken or leave any remnants
- Suitable for installing work without damaging the object surface
- Meets or exceeds ASME B107.410

| | This product is consumable, not within SATA Lifetime Warranty. |
|--|--|
|--|--|

| Article Code | Diameter (mm) | \$ |
|--------------|---------------|-----------|
| ST92521SC | 22.0 | 6 |
| ST92522SC | 28.0 | 6 |
| ST92523SC | 35.0 | 6 |
| ST92524SC | 45.0 | 6 |
| ST92525SC | 60.0 | 6 |

Hard Face Hammer Tip

- Ideal for various applications and use on a variety of surfaces and materials without marring and surface damage
- Hammer head hardness match material surface hardness can avoid surface abrasion and dents
- It will not be deformed, broken or leave any remnants
- Suitable for installing work without damaging the object surface
- Meets or exceeds ASME B107.410

| This product is consumable, not within SATA Lifetime War | anty. |
|--|-------|
|--|-------|

| Article Code | Diameter (mm) | \$ |
|--------------|---------------|-----------|
| ST92531SC | 22.0 | 6 |
| ST92532SC | 28.0 | 6 |
| ST92533SC | 35.0 | 6 |
| ST92534SC | 45.0 | 6 |
| ST92535SC | 60.0 | 6 |





14 Striking & Struck

Dead Blow Hammer

- Canister filled with steel shot in the hammer's head creates a dead blow effect to reduce rebound
- Non-sparking, non-marring soft face won't harm your target surface
- Resistant to gas, brake fluid, anti-freeze and more, with a polyurethane head and rubber handle
- Rubber handle has a knurled texture and flared back end for improved non-slip grip
- Ideal for professional environments where fire prevention is a priority or concern
- Meets or exceeds ASME B107.410



| Article Code | Head Weight (g) | Head Weight (oz) | Head Diameter (mm) | Overall Length (mm) | |
|--------------|-----------------|------------------|--------------------|---------------------|---|
| ST92901SC | 400.0 | 14.1 | 35.0 | 260.0 | 6 |
| ST92902SC | 520.0 | 18.3 | 45.0 | 286.0 | 6 |
| ST92903SC | 1050.0 | 37.0 | 55.0 | 350.0 | 4 |
| ST92904SC | 1500.0 | 52.9 | 65.0 | 370.0 | 4 |

Rubber Mallet Hammer

- Ideal for various applications and use on a variety of surfaces and materials without marring and surface damage
- Meets or exceeds ASME B107.410



Nature of this product is subject to wear and tear upon usage. Not covered under Lifetime Warranty.

| Article Code | Head Weight (g) | Head Weight (oz) | Overall Length (mm) | |
|--------------|-----------------|------------------|---------------------|---|
| ST92912ME | 454.0 | 16.0 | 330.0 | 6 |
| ST92913ME | 567.0 | 20.0 | 331.0 | 6 |



¹⁵ Measuring

Tape Measure

- ABS housing for increased strength and impact resistance
- Double-sided scale with measurement markings on the top and bottom side of the scale
- Bright yellow blade has clear easy-to-read numerals
- Nylon-coated blade provides extended product life and glare reduction
- Extra-Wide lock button for easy thumb engagement
- Blade lock holds blade at any length
- Tape measure hook with automatic reset setting, ensuring that both internal and external measurement start from zero position
- Automatic blade return
- Ergonomic case design for better fit in-hand during measuring
- Integrated D-ring with keychain attachment for carrying or storing convenience

Nature of this product is subject to wear and tear upon usage. Not covered under Lifetime Warranty.

| Article Code | Tape Length | Tape Width (mm) | Blade Style | |
|--------------|-------------|-----------------|--------------|----|
| ST91311E | 2.0 m | 13.0 | Metric | 12 |
| ST91312E | 3.0 m | 16.0 | Metric | 12 |
| ST91315E | 5.0 m | 25.0 | Metric | 6 |
| ST91316E | 8.0 m | 25.0 | Metric | 4 |
| ST91317E | 10.0 m | 25.0 | Metric | 4 |
| ST91318E | 3.0 m / 10' | 16.0 | Metric / SAE | 12 |
| ST91322E | 5.0 m / 16' | 25.0 | Metric / SAE | 6 |
| ST91323E | 8.0 m / 26' | 25.0 | Metric / SAE | 4 |

Tape Measure

- ABS housing for increased strength and impact resistance
- Bright yellow blade has clear easy-to-read numerals
- Clear coating extends life of blade and blade markings
- Blade lock holds blade at any length
- Tape measure hook with automatic reset setting, ensuring that both internal and external measurement start from zero position
- Automatic blade return
- Optimized design provides a compact case that fits comfortably in the palm of your hand
- Removable belt clip

Nature of this product is subject to wear and tear upon usage. Not covered under Lifetime Warranty.

| Article Code | Tape Length | Tape Width (mm) | Blade Style | \$ |
|--------------|--------------|-----------------|--------------|-----------|
| ST91312ME | 3.0 m / 10' | 13.0 | Metric / SAE | 12 |
| ST91314ME | 5.0 m / 16' | 19.0 | Metric / SAE | 12 |
| ST91316ME | 8.0 m / 26′ | 25.0 | Metric / SAE | 12 |
| ST91317ME | 10.0 m / 33' | 25.0 | Metric / SAE | 12 |

MEASURING






TAPE MEASURE METRIC/ SAE SCALE

ST91311E ST91312E ST91315E ST91316E ST91317E ST91318E ST91322E ST91323E



ABS housing for

resistance



Nvlon-coated

blade



button

Extra-wide lock



setting

at any length



uto- Integraded D-ring with keychain



Rubber Grip Tape Measure

- Rubber cushion housing absorbs impact for increased strength resistance
- Bright yellow blade has clear easy-to-read numerals
- Clear coating extends life of blade and blade markings
- Blade lock holds blade at any length
- Tape measure hook with automatic reset setting, ensuring that both internal and external measurement start from zero position
- Automatic blade return
- Optimized design provides a compact case that fits comfortably in the palm of your hand
- Rubber cushion for improved grip
- Removable belt clip

Nature of this product is subject to wear and tear upon usage. Not covered under Lifetime Warranty.

| Article Code | Tape Length | Tape Width (mm) | Blade Style | \$ |
|--------------|-------------|-----------------|--------------|-----------|
| ST91333ME | 3 m / 10' | 16.0 | Metric / SAE | 12 |
| ST91335ME | 5 m / 16' | 19.0 | Metric / SAE | 12 |
| ST91336ME | 8 m / 26 | 25.0 | Metric / SAE | 12 |

Fiberglass Long Tape

- Non-conductive, easy-to-read numerals
- High impact winding drum for smooth tape recovery
- UV coating extends life of blade and blade markings

| | Nature of this product is subject to wear and tear upon usage. Not covered under Lifetime Warranty. |
|--|--|
|--|--|

| Article Code | Tape Length | Tape Width (mm) | Blade Style | \$ |
|--------------|-------------|-----------------|--------------|-----------|
| ST91361ME | 15 m / 49' | 13.0 | Metric / SAE | 6 |
| ST91362ME | 30 m / 98' | 13.0 | Metric / SAE | 4 |
| ST91363ME | 50 m / 164' | 13.0 | Metric / SAE | 2 |





Square Zinc Handle

- Zinc handle
- Metric/Imperical scale
- Manufactured from stainless steel for better strength and longer tool life



Nature of this product is subject to wear and tear upon usage. Not covered under Lifetime Warranty.

| Article Code | Size | Style | \$ |
|--------------|--------------|--------------|-----------|
| ST91410ME | 150 mm / 6" | Metric / SAE | 6 |
| ST91411ME | 200 mm / 8" | Metric / SAE | 6 |
| ST91412ME | 250 mm / 10" | Metric / SAE | 6 |
| ST91413ME | 300 mm / 12" | Metric / SAE | 6 |

LD Square

- Metric/Imperical scale
- Manufactured from stainless steel for better strength and longer tool life
- Nature of this product is subject to wear and tear upon usage. Not covered under Lifetime Warranty.

| Article Code | Size | \$ |
|--------------|-----------------------------|-----------|
| ST91421ME | 610 mm / 24" x 305 mm / 12" | 6 |

3 Pc. Chalk Line Set

254

| Article Code | Content | |
|--------------|---|----|
| ST91430ME | 1 - 30 m Chalk Reel 1 - 115 g Blue Chalk 1 - Plastic Line Level | 10 |

Nature of this product is subject to wear and tear upon usage. Not covered under Lifetime Warranty.

| Article Code | Content | |
|--------------|------------------------|----|
| ST91431ME | Chalk Refill Blue 115g | 20 |
| ST91432ME | Chalk Refill Red 115g | 20 |



3 PC. CHALK LINE SET







Impact resistant case

Folding crank handle










ST91430ME

Vernier Caliper

- Manufactured from stainless steel for high measurement accuracy
- For measurement of inner hole, outer circle, and depth
- Comes in a high quality ABS plastic box





| Article Code | Size | Accuracy | \$ |
|--------------|--------------|----------|-----------|
| ST91501SC | 0.0 - 150 mm | ±0.03 mm | 6 |
| ST91502SC | 0.0 - 200 mm | ±0.03 mm | 6 |
| ST91503SC | 0.0 - 300 mm | ±0.03 mm | 4 |

Digital Caliper

- Easy to read large digital display
- 4 way measurement, inside, outside, depth and step ensures accuracy
- Scale and thumb roll makes reset possible at any position
- Wide and clear display measurements in either metric or Imperial units
- Features standard RS-232 output port for easy data collection
- Manufactured from stainless steel for better strength and longer tool life
- Comes in a high quality ABS plastic box

Nature of this product is subject to wear and tear upon usage. Not covered under Lifetime Warranty.

| Article Code | Size | Accuracy | |
|--------------|------------|----------|---|
| ST91511SC | 0 - 150 mm | ±0.03 mm | 6 |
| ST91512SC | 0 - 200 mm | ±0.03 mm | 6 |

Dial Caliper

- Manufactured from stainless steel for high measurement accuracy
- Upgraded indicator core for two-way shockproof performance
- Equipped with outer ring locking device
- For measurement of inner hole, outer circle, and depth
- Comes in a high quality ABS plastic box

Nature of this product is subject to wear and tear upon usage. Not covered under Lifetime Warranty.

| Article Code | Size | Accuracy | |
|--------------|------------|----------|---|
| ST91521SC | 0 - 150 mm | ±0.03 mm | 6 |
| ST91522SC | 0 - 200 mm | ±0.03 mm | 6 |



Outside Micrometer

- Measuring surface made from hardened steel to withstand repeated use
- Clearly audible ratchet operation for reassurance that measurement is being performed at constant force
- Locking screw and precision mechanism combine for exceedingly accurate measurements
- Comes in a high quality ABS plastic box

Nature of this product is subject to wear and tear upon usage. Not covered under Lifetime Warranty.

| Article Code | Size | Accuracy | |
|--------------|------------|-----------|---|
| ST91531SC | 0 - 25 mm | ±0.004 mm | 6 |
| ST91532SC | 25 - 50 mm | ±0.004 mm | 6 |
| ST91533SC | 50 - 75 mm | ±0.004 mm | 6 |

Aluminum Box Level

- Best frame strength-to-weight ratio
- Helps with fast and accurate installations
- Ruler with scale for easy measurement
- Built from one piece of aluminum for strength and durability
- Two shock absorbent end caps protect frame

| Nature of this product is subject to wear and tear upon usa Not covered under Lifetime Warranty. |
|--|
|--|

| Article Code | Size | Accuracy | \$ |
|--------------|--------|-----------|-----------|
| ST91601ME | 30 cm | ±0.5 mm/m | 10 |
| ST91602ME | 45 cm | ±0.5 mm/m | 10 |
| ST91603ME | 60 cm | ±0.5 mm/m | 10 |
| ST91604ME | 75 cm | ±0.5 mm/m | 6 |
| ST91605ME | 90 cm | ±0.5 mm/m | 6 |
| ST91606ME | 120 cm | ±0.5 mm/m | 6 |






Aluminium Magnetic Box Level

- Magnetic, easy to operate
- Best frame strength-to-weight ratio
- Helps with fast and accurate installations
- Ruler with scale for easy measurement
- Built from one piece of aluminum for strength and durability
- Two shock absorbent end caps protect frame





| Article Code | Size | Accuracy | \$ |
|--------------|-------|-----------|-----------|
| ST91611ME | 30 cm | ±0.5 mm/m | 10 |
| ST91612ME | 45 cm | ±0.5 mm/m | 10 |
| ST91613ME | 60 cm | ±0.5 mm/m | 10 |
| ST91614ME | 75 cm | ±0.5 mm/m | 10 |
| ST91615ME | 90 cm | ±0.5 mm/m | 6 |

Magnetic Torpedo Level

- Magnetic, easy to operate
- Helps with fast and accurate installations
- Two shock absorbent end caps protect frame



Nature of this product is subject to wear and tear upon usage. Not covered under Lifetime Warranty.

| Article Co | e Size | Accuracy | |
|------------|-------------|-----------|----|
| ST91621ME | 230 mm / 9" | ±0.5 mm/m | 10 |



¹⁶ Auto Speciality Tools

Ø. 77

SATA

3 Pc. L-Shaped Wheel Wrench Set

| Article Code | Content | | Article Code | Content | \$ |
|--------------|---|---|--------------|---|-----------|
| ST09531SJ | 1 - 1/2" Dr. Offset Handle 345 mm 1 - 1/2" Dr. Dual Head Socket 17 x 19 mm 1 - 1/2" Dr. Dual Head Socket 21 x 23 mm | 5 | ST09152SJ | 1 - Anvil Dolly 1 - Wedge Dolly 1 - Pry Bumping Spoon 1 - Toe Dolly 1 - Light Shrinking Hammer 1 - Pick & Finishing Hammer | 2 |

Please refer to the warranty terms of the individual product.



50 Pc. Auto Repair Master Tool Set

| Article Code | Content | |
|--------------|---|---|
| ST09508 | 1/2" Dr. Quick-Release Ratchet 1/2" Dr. 12pt. Metric Sockets 8, 10, 12, 17, 18, 19, 20, 21, 22, 24, 27 mm 1/2" Dr. 50L Bit Socket Hex 17 mm 1/2" Dr. 50L Bit Socket Hex 7 mm 1/2" Dr. 100L Bit Socket Hex 7 mm 1/2" Dr. Extra Long Bit Sockets Hex 6x70, 8x120, 6x250, 5x180, 6x140, 10x140 mm Triple Square M8x100, M10x120, M10x140 mm Extra Long Arm Ball Point Hex Key Set 1.5, 2, 2.5, 3, 4, 5, 6, 8, 10 mm 1/2" Dr. Spark Plug Sockets 16, 21 mm Raised Panel Combination Wrenches 8, 10, 13, 17, 19, 22 mm Cushion Grip Go-Through Screwdrivers Slotted 6x100 mm Phillips #6x100 mm Accessories 1/2" Dr. T-Handle 1/2" Dr. Universal Joint 1/2" Dr. Universal Joint 1/2" Dr. Universal Joint 3/8" Dr. Two Way Oil Filter Wrench with Adapter Front Shock Absorber Socket | 2 |

Please refer to the warranty terms of the individual product.

6 Pc. Automotive Body Repair **Tool Set**



Please refer to the warranty terms of the individual product.





56 Pc. Auto Repair Master Tool Set

| Article Code | Content 🗳 |
|--------------|--|
| ST09509 | 1 - 3/8" Dr. Quick-Release Ratchet 3 15 - 3/8" Dr. 6pt. Metric Sockets 7, 8, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24 mm 3 2 - 3/8" Dr. Spark Plug Sockets 16, 21 mm 11 11 - Metric Combination Wrenches 8, 10, 12, 13, 14, 15, 16, 17, 18, 19, 22 mm 1 1 - Long Nose Pliers 6" 1 1 - Slip Joint Pliers 2 2 - Cushion Grip Go-Through Screwdrivers Slotted 6X100 mm Phillips #2x100 mm 9 - 1/4" Shank 25L Bits Slotted 4, 5, 6.5 mm Phillips #1, #3 Hex 3, 4, 5, 6 mm 9 9 - Accessories 1/4" Dr. Spinner Handle 1/4" Dr. Spinner Handle 1/4" Dr. Nobble Extension Bars 3", 10" 3/8" Dr. Universal Joint 1/4" F x 3/8" M, 3/8"F x 1/4" M Socket Adapters 1/2" F x 3/8" M 3-Way Adapter 9 Pc. Long Arm Tamper-Proof Torx Key Set TT10, TT15,TT20, T25,TT27, 30, TT40, TT45, TT50 |



Please refer to the warranty terms of the individual product.

53 Pc. Telecom Set

| Article Code | Content | |
|--------------|--|---|
| ST09535SJ | 11 - 1/4" Dr. 6pt. Metric Sockets 4, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13 mm 15 - 1/4" Shank 25L Bits Slotted 4, 5.5, 6.5 mm Phillips #1, #2, #3 Tamper-Proof Torx® T10, T15, T20 Hex 2, 2.5, 3, 4, 5, 6 mm 4 - Acetate Screwdrivers Philips #1x75 mm, #2x200 mm Slotted 5x75 mm, 6x100 mm 6 - Precision Combination Screwdrivers Philips #000x75 mm, #0x100 mm, #1x150 mm Slotted 2x75 mm, 3x100 mm, 4x150 mm 17 - Accessories 1/4" Drive Bit Adapter 25 mm 1/4" Drive Magnetic Bit Driver Circuit Tester Long Nose Pliers 6" Electrician's Knife Soldering Iron 30W Soldering Iron Stand Anti-static Brush Digital Multi-meter Desoldering Pump Insulation Tape Adjustable Wrench 6" Solder Wire 17G Aluminum Flashlight Self Adjusting Wire Stripper 6-1/2" Tape Measure 3 m" | 2 |



HYDRAULIC BOTTLE JACK







Welded steel Ty construction ha

Two-Piece handle design Center adjustment



Please refer to the warranty terms of the individual product.

262





Double levers for user ergonomics

HEAVY DUTY ST97817SC ST97813SC ST97813A (LOW PROFILE) SERVICE JACK 2T / 2.5T / 3T













in any handle position





Hydraulic Bottle Jack


- Welded steel construction for leak free performance
- Two-piece handle design for easy storage
- Center Adjustment
- Double levers for user ergonomics

Nature of this product is subject to wear and tear upon usage. Not covered under Lifetime Warranty.

| Article Code | Load Capacity | Min. Height (mm) | Max. Height (mm) | Extender Heigt (mm) | |
|--------------|---------------|------------------|------------------|---------------------|---|
| ST97801ASC | 2 T | 181 | 344.0 | 48.0 | 6 |
| ST97802ASC | 4 T | 193 | 373.0 | 60.0 | 6 |
| ST97803ASC | 6 T | 210 | 416.0 | 70.0 | 4 |
| ST97804ASC | 8 T | 225 | 455.0 | 80.0 | 4 |
| ST97805ASC | 10 T | 230 | 460.0 | 80.0 | 4 |
| ST97807ASC | 16 T | 230 | 440.0 | 60.0 | 4 |
| ST97808ASC | 20 T | 242 | 452.0 | 60.0 | 4 |
| ST97809ASC | 32 T | 275 | 440.0 | - | 4 |
| ST97810ASC | 50 T | 265 | 425.0 | - | 4 |

Heavy Duty Low Profile Service Jack 2 T

- Built-in safety overload device prevents use beyond rated capacity
- Dual piston pump for rapid lifting
- Ultra low profile is ideal for sport cars and vehicles with flat tires and low chassis
- Patent dual handle design for better leverage and a solid grip
- Universal joint release mechanism for precision control in any handle position
- Ergonomic design
- Manufactured from steel with reinforced body
- Meets or exceeds ASME PALD-2009



| Article Code | Load Capacity | Max. Height (mm) | Min. Height (mm) | \$ |
|--------------|---------------|------------------|------------------|-----------|
| ST97817SC | 2 T | 505.0 | 76.0 | 1 |

Safety overload device

Dual piston pump

Ultra low profile Dual handle design





Heavy Duty Service Jack 2.5 T

- Built-in safety overload device prevents use beyond rated capacity
- Dual piston pump for rapid lifting
- Patent dual handle design for better leverage and a solid grip
- Universal joint release mechanism for precision control in any handle position
- Manufactured from steel with reinforced body
- Meets or exceeds ASME PALD-2009



Nature of this product is subject to wear and tear upon usage. Not covered under Lifetime Warranty.

| Article Code | Load Capacity | Max. Height (mm) | Min. Height (mm) | (|
|--------------|---------------|------------------|------------------|----------|
| ST97813SC | 2.5 T | 460.0 | 130.0 | 1 |

Heavy Duty Low Profile Service Jack 3 T

- Built-in safety overload device prevents use beyond rated capacity
- Dual piston pump for rapid lifting
- Ultra low profile is ideal for sport cars and vehicles with flat tires and low chassis
- Patent dual handle design for better leverage and a solid grip
- Universal joint release mechanism for precision control in any handle position
- Manufactured from steel with reinforced body
- Meets or exceeds ASME PALD-2009



Nature of this product is subject to wear and tear upon usage. Not covered under Lifetime Warranty.

| Article Code | Load Capacity | Max. Height (mm) | Min. Height (mm) | \$ |
|--------------|---------------|------------------|------------------|-----------|
| ST97813A | 3 T | 502.0 | 78.0 | 1 |

14 Pc. Feeler Gauge Set 0.05 - 1.00 mm 16 Pc. Feeler Gauge Set 0.05 - 1.00 mm

| Article Code | Content | | Article Code | Content | |
|---------------------|---|----|------------------------|---|----|
| ST09401SJ | 0.05, 0.10, 0.15, 0.20, 0.25, 0.30, 0.40, 0.50, 0.60, 0.70, 0.80, 0.90, 1.00 mm | 24 | ST09402SJ | 0.05, 0.10, 0.15, 0.20, 0.25, 0.30, 0.35, 0.40, 0.50, 0.55, 0.60, 0.70, 0.75, 0.80, 0.90, 1.00 mm | 12 |
| Nature of Not cover | this product is subject to wear and tear upon usag ed under Lifetime Warranty. | е. | Nature of Not cover | this product is subject to wear and tear upon usag ed under Lifetime Warranty. | е. |
| | | | | | |
| | | | | | |
| | | I | | at strong | |
| | 04.0 | | | Bro Co | |
| | 0000 | | | C A B | |



23 Pc. Feeler Gauge Set 0.02 - 1.00 mm 32 Pc. Feeler Gauge Set 0.02 - 1.00 mm

| Article Code | Content | | Article Code | Content | |
|------------------------|--|----|---------------------|--|----|
| ST09405SJ | 0.02, 0.03, 0.04, 0.05, 0.10, 0.15, 0.20, 0.25, 0.30, 0.35, 040, 0.45, 0.50, 0.55, 0.60, 0.65, 0.70, 0.75, 0.80, 0.85, 0.90, 0.95, 1.00 mm | 36 | ST09407SJ | 0.02, 0.03, 0.04, 0.05, 0.06, 0.07, 0.08, 0.09, 0.10, 0.13, 0.15, 0.18, 0.20, 0.23, 0.25, 0.28, 0.30, 0.33, 0.38, 0.40, 0.45, 0.50, 0.55, 0.60, 0.63, 0.65, 0.70, 0.75, 0.80, 0.85, 0.90, 1.00 mm | 24 |
| Nature of Not cover | this product is subject to wear and tear upon usag red under Lifetime Warranty. | е. | Nature of Not cover | this product is subject to wear and tear upon usage ed under Lifetime Warranty. | 9. |
| | | | | | |
| SORES BELL | | | | 5340 AL | |
| | 180 | | | A A A A A A A A A A A A A A A A A A A | |
| | 560 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 | | | uuuoo'i 024 920 | 2 |
| | 56 6 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8 | | | Office and a start of the start | |
| | | | | | |
| | $D \mathcal{V}$ | | | | |



3 Pc. Fuel and AC Disconnect Tool Set 8 Pc. End Cap Oil Filter Wrench Set

| Article Code | Content | | Article Code | Content | |
|--------------|---|----|--------------|---|---|
| ST09406SJ | Ford fuel line coupling tool Ford A/C and fuel line spring lock coupling tool Fuel line quick disconnect tool | 10 | ST09703SJ | 6 - 1/2" Dr. End Cap Oil Filter Wrenches 65, 74, 76, 80, 90, 93 mm 1 - 3/8" Dr. Quick-Release Ratchet 1 - 3/8" F x 1/2" M Socket Adapter | 4 |





End Cap Oil Filter Wrench

- For use with a 1/2" square drive tool
- Black electro-deposition coated finish for durability and corrosion resistance
- Overtop access application



| Article Code | Size (mm) | Flute (mm) | |
|--------------|-----------|------------|---|
| ST97401ST | 65.0 | 14.0 | 4 |
| ST97403ST | 74.0 | 15.0 | 4 |
| ST97404ST | 76.0 | 14.0 | 4 |
| ST97405 | 80.0 | 15.0 | 4 |
| ST97406 | 90.0 | 15.0 | 4 |

Drive End Cap Oil Filter Wrench

- For use with a 1/2" square drive tool
- Black electro-deposition coated finish for durability and corrosion resistance
- Overtop access application

| ST97407 93.0 15.0 4 | Article Code | Size (mm) | Flute (mm) | |
|----------------------------|--------------|-----------|------------|---|
| | ST97407 | 93.0 | 15.0 | 4 |

Oil Filter Wrench

- Universal adjustment
- Professional, ergonomic dipped grips wipe clean easily
- Chrome plated finish to resist corrosion

Nature of this product is subject to wear and tear upon usage. Not covered under Lifetime Warranty.

| Article Code | Size (mm) | |
|--------------|-------------|----|
| ST97427SC | 55.0 - 75.0 | 12 |
| ST97428SC | 75.0 - 95.0 | 12 |

Oil Filter Strap Wrench

- Strap is made of high strength nylon and handle is made of forged steel
- Use with 1/2" drive tools or 13/16" wrench tools to handle filters with diameters up to 120 mm

| Article Code | Size (mm) |
|--------------|-----------|
| ST97431ME | 240.0 |







| Capacity (mm) | \$ |
|---------------|-----------|
| 120.0 | 12 |

Oil Filter Strap Wrench

- For use on oil filters up to 120 mm diameter
- Strong nylon belt will not slip
- Use with 1/2" drive tools or 13/16" wrench tools
- Chrome vanadium steel buckle



| Article Code | Size | Capacity (mm) | \$ |
|--------------|------|---------------|-----------|
| ST97441ST | 18" | 120.0 | 12 |

Universal 3-Jaw Oil Filter Wrench

- Use with 1/2" square drive tools with no adapter required
- Heavy duty design with increased torque to loosen tough filters
- Provides a wide application range from 63 102 mm (2.5" 4")



| Article Code | Max Diameter (mm) | Min Diameter (mm) | |
|--------------|-------------------|-------------------|---|
| ST97422ST | 102.0 | 63.0 | 2 |

Adjustable Oil Filer Wrench Pliers

- Two clamp handle for maximum clamping power
- Professional dipped grips for easy cleaning and better control
- For removing oil filters from 63.5 mm to 116.0 mm in diameter



| Article Code | Max Diameter (mm) | Min Diameter (mm) | \$ |
|--------------|-------------------|-------------------|-----------|
| ST97426ST | 116.0 | 63.5 | 6 |

Chain Wrench

- Excellent for pipe fittings
- Great for confined areas where regular pipe wrenches cannot reach
- High-visibility stamped markings provide quick size identification
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Manufactured from steel for better strength and longer tool life

| Article Code | Size | Capacity (mm) | |
|--------------|------|---------------|---|
| ST97451SC | 12" | 55.0 - 110.0 | 4 |
| ST97452SC | 15″ | 60.0 - 130.0 | 4 |

1/2" Drive Air Impact Wrench 625 Nm

- Hard hitting twin hammer provides high torque output while reducing vibration
- Handle exhaust at bottom cable directs debris and dust away from machine and operator
- Variable speed trigger gives control over RPM
- Compact design
- 1/4" Air intake

Nature of this product is subject to wear and tear upon usage. Not covered under Lifetime Warranty.

| Article Code | Max Torque | Working Torque | Free Rotation | Working Pressure | Air Consumption | Weight | |
|--------------|------------|----------------|---------------|----------------------------------|-----------------|--------|----|
| ST01111 | 625 Nm | 400 Nm | 10.000 RPM | 90 PSI, 6,35 kgf/cm ² | 4.7 CFM | 1.5 kg | 10 |

1/2" Drive Air Impact Wrench 800 Nm

- Hard hitting twin hammer provides high torque output while reducing vibration
- Handle exhaust at bottom cable directs debris and dust away from machine and operator
- Variable speed trigger gives control over RPM
- Classic design
- 1/4" Air intake

Nature of this product is subject to wear and tear upon usage. Not covered under Lifetime Warranty.

| Article Code | Max Torque | Working Torque | Free Rotation | Working Pressure | Air Consumption | Weight | |
|--------------|------------|----------------|---------------|----------------------------------|-----------------|--------|---|
| ST01113C | 800 Nm | 600 Nm | 7.500 RPM | 90 PSI, 6,35 kgf/cm ² | 4.2 CFM | 2.2 kg | 6 |








1/2" Drive Air Impact Wrench 1050 Nm

- Hard hitting twin hammer provides high torque output while reducing vibration
- Handle exhaust at bottom cable directs debris and dust away from machine and operator
- Variable speed trigger gives control over RPM
- Solid fiberglass handle covered with a molded nylon jacket
- 1/4" Air intake






| Article Code | Max Torque | Working Torque | Free Rotation | Working Pressure | Air Consumption | Weight | |
|--------------|------------|----------------|---------------|----------------------------------|-----------------|--------|---|
| ST01119 | 1050 Nm | 800 Nm | 8.500 RPM | 90 PSI, 6,35 kgf/cm ² | 4.8 CFM | 2.2 kg | 6 |

1" Drive Heavy Duty Air Impact Wrench

- Shock resistant housing with plastic protector helps protect tool and prevent scuffing
- Ergonomic design is 10% lighter than competitors without compromising on perfromance
- 9" (23 cm) rod can be used for automotive repairs, major construction projects, heavy equipment maintenance, or product assembly
- Air line does not neet to be removed for lubrication
- 45° Air intake for better equipment handling
- 1/2" Air intake





| Article Code | e Max Torque | Working Torque | Idle Speed | Working Pressure | Air Consumption | Weight | |
|--------------|--------------|----------------|------------|--------------------------------|-----------------|---------|---|
| ST01133SC | 4000 Nm | 3000 Nm | 8.500 RPM | 110 PSI, 8 kgf/cm ² | 15 CFM | 16.8 kg | 1 |

1/2" DRIVE AIR IMPACT WRENCH







Twin hammer system

Exhaust parallel to cable

Variable speed trigger





ST01111 ST01113C ST01119



1" DRIVE HEAVY DUTY AIR IMPACT WRENCH













45° Air intake



Piston Ring Compressor

- Tool is beaded along lower edge to prevent compressor from entering the cylinder
- Heavy spring steel compresses the stiffest rings evenly
- Positive lock action provides positive compression and fingertip release



Nature of this product is subject to wear and tear upon usage. Not covered under Lifetime Warranty.

| Article Code | Size | Working Range (mm) | \$ |
|--------------|------|--------------------|-----------|
| ST97501SC | 3" | 53.0 - 175.0 | 30 |
| ST97502SC | 4" | 60.0 - 175.0 | 30 |

Cross Wheel Wrench

- For use on lugnut sizes 17 mm, 19 mm, 21 mm
- Single hex (6 pt.) fastener end design
- Off-corner loading design reduces fastener rounding
- 1/2" drive end allows for 1/2" drive socket to be added
- Ball detent for secure socket retention
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability

| Nature of Not cover |
|------------------------|
| |

this product is subject to wear and tear upon usage. red under Lifetime Warranty.

| Article Code | Size |
|--------------|---------------------|
| ST48101ST | 17, 19, 21 mm, 1/2" |





ST01133SC

10% lighter 9" (23 cm) rod No need to remove air line for lubrication







| \$ |
|----|
| 4 |
| |

5 Pc. Fine Threaded Extractor Set

- Fine thread for removing screws and studs that cannot be held firmly
- Tapered extractors for broken screws and studs
- Coarse thread design for longer usage life
- Tempered steel construction offers strength and durability for long-lasting performance
- Comes in sturdy plastic case for organization and storage



Nature of this product is subject to wear and tear upon usage. Not covered under Lifetime Warranty.

| Article Code | Content | |
|--------------|--------------------|----|
| ST09704SJ | 2, 3, 4, 6.5, 7 mm | 20 |

5 Pc. Coarse Threaded Extractor Set

- Used to quickly remove broken, embedded or damaged screws
- Coarse thread design for longer usage life
- Tempered steel construction offers strength and durability for long-lasting performance
- Comes in sturdy plastic case for organization and storage



| Nature of this product is subject to wear and tear upon usage. Not covered under Lifetime Warranty. | |
|--|--|
| Not covered under Lifetime Warranty. | |

| Article Code | Content | |
|--------------|----------------------------|---|
| ST09704ASJ | 3.3, 5.3, 64, 8.8, 11.2 mm | 6 |

5 Pc. Hook and Pick Set

- Use to pull O-rings, seals, and split pins quickly and easily
- Includes magnetic handle
- Magnetic handle retrieves small ferrous metal parts easily
- Heat treated for long lasting durability

| Nature of this product is subject to wear and tear upon usage. | |
|--|--|
| Not covered under Lifetime Warranty. | |

| Article Code | Content | (|
|--------------|--|----------|
| ST09709SJ | 1 - Magnetic Aluminum Handle 5" 4 - Picks O-Ring, 90°, Straight, Hook | 20 |

2-Jaw Reversible Pullers

- Reversible Jaws for internal or external applications
- Heat treated for long lasting durability
- Pilot point on screw tip for centering
- Phosphate coating on the spindle to resist corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability

| Article Code | Size | Overall Length (mm) | Jaw Capacity (mm) | |
|--------------|------|---------------------|-------------------|---|
| ST90623SC | 3" | 125.0 | 75.0 | 1 |
| ST90624SC | 4" | 155.0 | 100.0 | 1 |
| ST90626SC | 6" | 240.0 | 150.0 | 1 |
| ST90628SC | 8" | 325.0 | 200.0 | 1 |

3-Jaw Reversible Pullers

- Reversible Jaws for internal or external applications
- Heat treated for long lasting durability
- Pilot point on screw tip for centering
- Phosphate coating on the spindle to resist corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability

| Article Code Size | | Overall Length (mm) | Jaw Capacity (mm) | |
|-------------------|-----|---------------------|-------------------|---|
| ST90633SC | 3" | 125.0 | 75.0 | 1 |
| ST90634SC | 4" | 155.0 | 100.0 | 1 |
| ST90636SC | 6″ | 240.0 | 150.0 | 1 |
| ST90638SC | 8" | 325.0 | 200.0 | 1 |
| ST90640 | 10" | 340.0 | 250.0 | 1 |
| ST90642 | 12" | 385.0 | 300.0 | 1 |





Ball Joint Puller Large

- 2 Jaw puller design
- Swivel design provides better access to hard to reach areas
- Jaws spread up to 10-150 mm (0.39" 5.91") wide
- Chrome plated finish to resist corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability



| Article Code | Jaw Capacity | |
|--------------|-----------------------------|---|
| ST90662SC | 10.0-150.0 mm (0.39"-5.91") | 6 |

Universal Ball Joint Separator

- Tool separates ball joints from steering knuckles
- Adjustable for removing ball joints in limited space
- Heat treated for long lasting durability
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability




| Article Code | |
|--------------|---|
| ST90651SC | 6 |

50 - 75 mm Bearing Separator

- For pulling and removing bearings
- Chrome molybdenum alloy steel (Cr-Mo) for exceptional strength and durability





| Article Code | |
|--------------|--|
| ST90658ST | |

Ball Joint Separator

- Tool separates ball joints from steering knuckles
- Forged to withstand hard usage

| Article Code | |
|--------------|--|
| ST90665 | |

Universal Ball Joint Separator

- Tool separates ball joints from steering knuckles
- Works on ball joints from 1-1/8" 2-1/8" and 30 mm 56 mm in size
- Adjustable for removing ball joints in limited space
- Heat treated for long lasting durability
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability

| Article Code | C |
|--------------|--------------|
| ST90652SC | 3.0 - 56.0 n |

Wheel Weight Tool

Designed to install and remove all types of wheel weight

| | N |
|------|----|
| Arti | cl |

12

Nature of this product is subject to wear and tear upon usage. Not covered under Lifetime Warranty.

| Article Code | |
|--------------|--|
| ST92107SC | |



Anvil Dolly

Made of high carbon steel, forged and tempered, for strength and durability

Wedge Dolly

• Made of high carbon steel, forged and tempered, for strength and durability





6

| Article Code | | Article Code |
|--------------|---|--------------|
| ST92203SC | 6 | ST92205SC |

Toe Dolly

 Made of high carbon steel, forged and tempered, for strength and durability

Drip Molding Spoon

 Made of high carbon steel, forged and tempered, for strength and durability



| Article Code | e 🚱 | | Articl |
|--------------|-----|---|--------|
| ST92207SC | 6 | | ST9220 |
| | | - | |



| Article Code | \$ |
|--------------|-----------|
| ST92209SC | 6 |

Coil Spring Compressor

- Reinforced screw thread desgin to ensure safety
- Suitable for use where space under wheel arch is limited • Works with 1/2" drive tools or with 21 mm socket and
- wrench
- Forged steel jaws for extended tool life

| Article Code | Size (mm) | |
|--------------|-----------|---|
| ST97701SC | 270.0 | 8 |
| ST97702SC | 370.0 | 8 |
| | | |

Grease Gun Coupler

- Unique coupler design includes a steel ball to prevent backflow of passing lubricants
- Replacement for common grease guns

Nature of this product is subject to wear and tear upon usage. Not covered under Lifetime Warranty.

Article Code

ST97211

Flexible Grease Gun Whip Hose

- For use with manual grease guns to reach into confined areas
- Heavy duty high strenght nylon sleeve for handling high pressure from hand held grease guns

Nature of this product is subject to wear and tear upon usage. Not covered under Lifetime Warranty.

| Article Code | Overall Length (mm) | |
|--------------|---------------------|---|
| ST97212 | 300.0 mm | 9 |
| ST97213 | 450.0 mm | 9 |





| 18 |
|----|
| |

Pistol Grip Grease Gun

- Tips are designed to ensure tighter tolerance and fit
- Hardened spring for consistant pressure
- Dual direction loading
- Compact and lightweight construction reduces user fatigue
- Unique filling nipple design with steel ball to prevent backflow
- Special plunger lock for safe and convenient filling




Nature of this product is subject to wear and tear upon usage. Not covered under Lifetime Warranty.

| Article Code | Bulk Capacity | Working Pressure | Max. Working Pressure | Output | \$ |
|--------------|---------------|------------------|-----------------------|---------------------|-----------|
| ST97201 | 100 cc | 2900 psi | 4000 psi | 0.5 oz / 40 strokes | 12 |

Plastic Handle Grease Gun

- 3 Way loading 400 ml / 14 oz simple package oil, sealed oil tank or 400 CC bulk oil
- Durable die-cast head for longer service life
- Hardened spring for consistant pressure
- Unique filling nipple design with steel ball to prevent backflow
- Special plunger lock for safe and convenient filling
- Quality steel lever handle with comfortable rubber grip



| Article Code | Bulk Capacity | Working Pressure | Max. Working Pressure | Output | (|
|--------------|---------------|------------------|-----------------------|-------------------|----------|
| ST97203 | 400 cc | 4500 psi | 10000 psi | 1 oz / 40 strokes | 12 |

Heavy Duty Grease Gun


- 3 Way loading 400 ml / 14 oz cartridge, filter pump or 600 CC bulk oil
- New "monticle" exhaust nozzle design, improving exhaust effect and lowering air pressuer
- Anti-impurity filter screen to prevent blockage caused by impurities entering the grease delivery pipe when adding bulk grease
- Lightweight aluminum alloy nozzle with extended handle design for improved leverage
- Equipped with a hose and nozzle for special access
- Quality steel lever handle with comfortable rubber grip
- Nature of this product is subject to wear and tear upon usage. Not covered under Lifetime Warranty.

| Article Code | Bulk Capacity | Working Pressure | Max. Working Pressure | Output | \$ |
|--------------|---------------|------------------|-----------------------|-------------------|-----------|
| ST97204A | 600 cc | 7000 psi | 10000 psi | 1 oz / 40 strokes | 1 |



High Leverage Riveter

- High leverage design
- Spring loaded
- Convenient nose piece storage in handle
- Designed for 2.4 mm (3/32), 3.2 mm (1/8), 4 mm (5/32), 4.8 mm (3/16) rivets

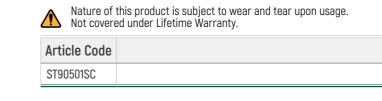

High Leverage Riveter With Collection Bottle

- High leverage non-slip handle design provides the power to pull larger rivets and ensures durability
- Pull and set rivets up to 6.4 mm (1/4") with ease
- Plastic collection bottle for easy disposal of spent mandrels
- Heavy duty steel construction

Nature of this product is subject to wear and tear upon usage. Not covered under Lifetime Warranty.

| Article Code | |
|--------------|--|
| ST90504 | |
| ST90502 | |

Air Blow Gun

- Working pressure: 5.0 ~ 8.0 kgf/cm²
- Brass pipe fitting size: 1/4" NPT
- Air pipe (I.D. 1/4"): 350 L/min Air pipe (I.D. 3/8"): 430 L/min
- Air flow: 1/4" inside diameter air tube: 350 L/Min 3/8" inside diameter air tube: 430 L/Min
- Nature of this product is subject to wear and tear upon usage. Not covered under Lifetime Warranty.

| Article Code | Size (mm) | \$ |
|--------------|-----------|-----------|
| ST97221SC | 100.0 | 5 |
| ST97222SC | 250.0 | 5 |



| Size | |
|------|---|
| 8″ | 6 |
| | |



| Size | |
|------|---|
| 11" | 8 |
| 13" | 8 |



Roller Seat with Magnetic Trays


- Air shock adjustable seat to suit any need
- 5 magnetic parts trays in the base for convenient storage
- Solid solvent resistent rubber seat
- Seat swivels 360° for extra mobility
- Simple and fast assembly without any tools required

Nature of this product is subject to wear and tear upon usage. Not covered under Lifetime Warranty.

| Article Code | Width (mm) Depth (mm) | Depth (mm) | Hight (mm) | \$ |
|--------------|-----------------------|------------|------------|-----------|
| ST95440 | 430.0 | 430.0 | 550.0 | 1 |

40" Creeper with Magnetic Trays

- Metal plates next to headrest for easy mounting of magnetic lights
- 135 kg /300 lb capacity
- Magnetic parts trays for convenient storage
- Custom-molded composite frame provides lasting durability
- Concave design ensures high comfort and ergonomic handling
- Back pad and head rest made of durable reinforced fibre
- Ball bearing casters reduce vibration



| Article Code | Width (mm) | Depth (mm) | Hight (mm) | |
|--------------|------------|------------|------------|---|
| ST95441 | 520.0 | 1000.0 | 150.0 | 1 |

Circuit Tester

- Measuring range from 100 500 V
- Tempered steel construction offers strength and durability for long-lasting performance



Excluded from Lifetime Warranty terms

| Article Code | Size (mm) | |
|--------------|-----------|----|
| ST62501ST | 145.0 | 24 |
| ST62502ST | 190.0 | 24 |



Digital Circuit Tester

- LED Digital display
- Testing range of 12, 36, 55, 110 and 220 V
- Features compact design
- No battery required

| Excluded fr | rom Lifetime Warranty terms | |
|--------------|-----------------------------|----|
| Article Code | Size (mm) | |
| ST62601ST | 130.0 | 24 |

Automotive Circuit Tester 6 V / 12 V / 24 V

- Designed for vehicles low voltage circuits
- Light turns on when voltage is detected
- Flexible coil cord
- Long-life LED tube
- Spring loaded terminal clamp



Excluded from Lifetime Warranty terms Â

| Article Code |
|--------------|
| ST62503ST |





| 10 |
|----|

¹⁷Other Tools

33" Extendable Indexing Pry Bar

- Head rotates 180° through 14 locking positions for better access and leverage
- Flex head tool provides access to areas fixed head tools cannot reach
- Grooved head profile grips and holds securely, even in tight confines and at the fullest extension
- Black oxide finish to resist corrosion
- Manufactured from steel for better strength and longer tool life
- Meets or exceeds DIN/ASME and ANSI requirements for proven strength, making it the perfect tool for heavyduty automotive or industrial work

| Article Code | Length (mm) | Width (mm) | Hight (mm) | \$ |
|--------------|-------------|------------|------------|-----------|
| ST92568 | 629.0 | 25.0 | 25.0 | 1 |

2 Pc. Indexing Pry Bar Set

minut

MODEL: DRIVE MO Volt(V)

BLADE SIZE (m

110, CHING-FU S

TEL: 885-3,57224

- Heads rotate 180° through 14 locking positions for better access and leverage
- Flex head tools provide access to areas fixed head tools cannot reach
- Grooved head profile grips and holds securely, even in tight confines and at the fullest extension
- Black oxide finish to resist corrosion
- Manufactured from steel for better strength and longer tool life
- Alloy steel bodies and black phosphate finish


| Article Code | (|
|--------------|---|
| ST92569 | |


Wood Handle Putty Scraper

- Precision ground blade for heavy duty edges
- Wood handle offers ease of grip so you can work confidently over time
- Can be used for clearing dirt on engine cylinder surface and other metal surfaces

| | Nature of this product is subject to wear and tear upon usage. Not covered under Lifetime Warranty. |
|--|--|
|--|--|

| Article Code | |
|--------------|--|
| ST95201ST | |

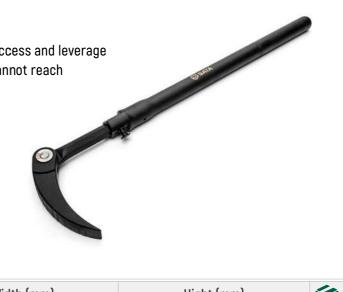

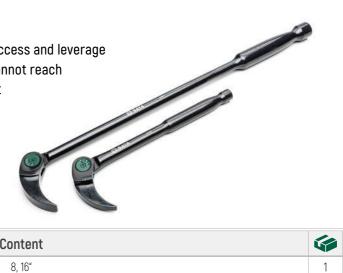



INDEXING PRY BARS

ST92568 ST92569



Head rotates 180° Flex head





securely







Manufactured from steel



Magnetic Pick-Up Tool

- Extended shaft for better access
- · Features sewn in, powerful magnets which stay on any metal surface easily
- Sleek handle design for maximum power, user comfort, and greater access
- High-impact, contoured handle presents an ergonomic and strong grip
- Oil and solvent resistant handle provides a longer tool life
- Handle designed with "through hole" for easy storage

Nature of this product is subject to wear and tear upon usage. Not covered under Lifetime Warranty.

| Article Code | Overall Length Min (mm) | Overall Length Max (mm) | | |
|--------------|-------------------------|-------------------------|--|--|
| ST11924ST | 165.0 | 545.0 | | |

Flexible Magnetic Pick-Up Tool

- 100% solid impact resistant acetate handle for lasting durability
- Durable soft shank surface with chrome plating provides flexibility for any working environment
- High-strength magnets effectively avoid dropping workpiece
- Handle designed with "through hole" for easy storage
- Chrome plated finish to resist corrosion



Nature of this product is subject to wear and tear upon usage. Not covered under Lifetime Warranty.

| Article Code Size (mm) | | Holding Capacity (kg) | Overall Length (mm) | (|
|------------------------|-----|-----------------------|---------------------|----------|
| ST64104 | 6.0 | 0.5 | 502.0 | 6 |
| ST64101 | 6.0 | 1.0 | 502.0 | 8 |
| ST64102ST | 8.0 | 2.0 | 510.0 | 6 |
| ST64103 | 8.0 | 3.0 | 510.0 | 6 |





C-Clamp

- Iron frame with steel screw and swivel, sliding pin handle
- Powder coated metal for long lasting durability



Nature of this product is subject to wear and tear upon usage. Not covered under Lifetime Warranty.

| Article Code | Size | Max Crimping Depth (mm) | Max Crimping Thickness (mm) | Overall Hight (mm) | Overall Length (mm) | Overall Width (mm) | \$ |
|--------------|------|----------------------------|--------------------------------|-----------------------|------------------------|-----------------------|-----------|
| ST90433ST | 3″ | 48.0 | 75.0 | 92.0 | 174.0 | 179.0 | 4 |
| ST90434ST | 4″ | 54.0 | 100.0 | 107.0 | 216.0 | 19.0 | 4 |
| ST90435ST | 6″ | 70.0 | 150.0 | 129.0 | 282.0 | 21.0 | 2 |
| ST90436ST | 8″ | 83.0 | 200.0 | 147.0 | 343.0 | 222.0 | 1 |

Mechanics Bench Vise

- Square steel structure provides high strength clamping force for safety use
- Replaceable serrated main jaws provide tight grip
- Large anvil work surface for shaping
- Machined base plate for smooth swivel with lug holes for secure positioning
- Manufactured from heavy duty cast iron for strength and durability



Nature of this product is subject to wear and tear upon usage. Not covered under Lifetime Warranty.

| Article Code | Size | Maxi Crimping Width (mm) | Crimping Force | |
|--------------|------|--------------------------|----------------|---|
| ST70841SC | 4" | 108.0 | 1700 kg | 1 |
| ST70842SC | 5″ | 133.0 | 2100 kg | 1 |
| ST70843SC | 6″ | 152.0 | 3000 kg | 1 |
| ST70845SC | 8″ | 203.0 | 4000 kg | 1 |



Article Code Index

| Article Code | Page No. | Article Code | Page No. | Article Code | Page No. | Article Code | Page No. | Article Code | Page No. | Article Code | Page No. |
|--------------------|-------------|-----------------|-------------|--------------------|-------------|-----------------|-------------|-----------------|-------------|------------------------|-------------|
| SC09920 | 30 | SC21402 | 58 | SC34406T | 111 | SC48621 | 135 | SC80306 | 232 | ST03142 | 220 |
| SC09928 | 25 | SC21403 | 58 | SC34407T | 111 | SC48622 | 135 | SC80307 | 232 | ST03621 | 11 |
| SC09930-1 | 28 | SC21501 | 58 | SC34408T | 111 | SC49201 | 136 | SC80308 | 232 | ST03901ME | 191 |
| SC09931-1 | 29 | SC21502 | 58 | SC34409T | 111 | SC49203 | 136 | SC80310 | 232 | ST04110SC | 36 |
| SC09946-1 | 26 | SC21503 | 58 | SC34410T | 111 | SC49204 | 136 | SC80312 | 232 | ST06001SJ | 35 |
| SC09947-1 | 27 | SC22101 | 70 | SC34411T | 111 | SC49205 | 136 | SC80314 | 232 | ST06002 | 35 |
| SC11201 | 53 | SC22102 | 70 | SC34412T | 111 | SC49208 | 136 | SC80316 | 232 | ST06004 | 35 |
| SC11202 | 53 | SC22103 | 70 | SC34414T | 111 | SC49210 | 136 | SC81104 | 233 | ST06008SJ | 36 |
| SC11203 | 53 | SC22104 | 70 | SC34415T | 111 | SC59211 | 225 | SC81105 | 233 | ST06011 | 36 |
| SC11204 | 53 | SC22105 | 70 | SC34417T | 111 | SC59213 | 225 | SC81106A | 233 | ST08001SJ | 122 |
| SC11205 | 53 | SC22106 | 70 | SC34419T | 111 | SC59215 | 225 | SC81107A | 233 | ST08002SJ | 123 |
| SC11205 | 53 | SC22100 | 70 | SC34420T | 111 | SC59215 | 225 | SC81107A | 233 | ST080023J | 131 |
| | 53 | SC22107 | 70 | SC344201 | 114 | | 225 | | 233 | | 127 |
| SC11207 | | | | | | SC59217 | | SC81110A | | ST08006SJ | |
| SC11208 | 53 | SC22109 | 70 | SC34631 | 114 | SC59218 | 225 | SC81111 | 233 | ST08007ASJ | 147 |
| SC11209 | 53 | SC22110 | 70 | SC34633 | 114 | SC59221 | 225 | SC81112A | 233 | ST08007SJ | 131 |
| SC12111 | 61 | SC22111 | 70 | SC34634 | 114 | SC59222 | 225 | SC81113A | 233 | ST08008SJ | 153 |
| SC12201 | 63 | SC22201 | 70 | SC34635 | 114 | SC59223 | 225 | SC81114A | 233 | ST08010 | 129 |
| SC12202 | 63 | SC22202 | 70 | SC34636 | 114 | SC59224 | 225 | SC81116A | 233 | ST08012 | 131 |
| SC12203 | 63 | SC22203 | 70 | SC34637 | 114 | SC59231 | 226 | SC81304 | 234 | ST08013 | 128 |
| SC12204 | 63 | SC22204 | 70 | SC34638 | 114 | SC59232 | 226 | SC81305 | 234 | ST08014SJ | 128 |
| SC12205 | 63 | SC22205 | 70 | SC34640 | 114 | SC59233 | 226 | SC81306 | 234 | ST08015SJ | 158 |
| SC12206 | 63 | SC22206 | 70 | SC47305 | 167 | SC59234 | 226 | SC81307 | 234 | ST08016 | 158 |
| SC12207 | 63 | SC22207 | 70 | SC47308 | 167 | SC59235 | 226 | SC81308A | 234 | ST08017 | 127 |
| SC12208 | 63 | SC22301 | 70 | SC47310 | 167 | SC59236 | 226 | SC81310 | 234 | ST08018-02 | 123 |
| SC12209 | 63 | SC22302 | 70 | SC47312 | 167 | SC59237 | 226 | SC81312 | 234 | ST08019-02 | 129 |
| SC12203 | 101 | SC22302 | 70 | SC47312 | 167 | SC59238 | 226 | SC81312 | 234 | ST08020 | 149 |
| | | | | | | | | | | | |
| SC12802 | 101 | SC22401 | 70 | SC47314 | 167 | SC59251 | 226 | SC81316 | 234 | ST08023 | 132 |
| SC12803 | 101 | SC22402 | 70 | SC47317 | 167 | SC59253 | 226 | SC84321 | 238 | ST08028 | 21 |
| SC12804 | 101 | SC22403 | 70 | SC47319 | 167 | SC59254 | 226 | SC84322 | 238 | ST08032 | 155 |
| SC12807 | 101 | SC22501 | 70 | SC47321 | 167 | SC59255 | 226 | SC84324 | 238 | ST08033 | 163 |
| SC12808 | 101 | SC22502 | 70 | SC47322 | 167 | SC59256 | 226 | SC84329 | 238 | ST08034E | 22 |
| SC12809 | 101 | SC22503 | 70 | SC47324 | 167 | SC59257 | 226 | SC84501 | 239 | ST08041 | 129 |
| SC12810 | 101 | SC22504 | 70 | SC47325 | 167 | SC59258 | 226 | SC84502 | 239 | ST08042 | 133 |
| SC12811 | 101 | SC22601 | 70 | SC48512 | 134 | SC59261 | 225 | SC84503 | 239 | ST08043U | 155 |
| SC12812 | 101 | SC22602 | 70 | SC48522 | 134 | SC59262 | 225 | SC84504 | 239 | ST08044 | 160 |
| SC12814 | 101 | SC22603 | 70 | SC48523 | 134 | SC59263 | 225 | SC84505 | 239 | ST08044B | 160 |
| SC12815 | 101 | SC22604 | 70 | SC48524 | 134 | SC59415 | 227 | SC84506 | 239 | ST08044U | 155 |
| SC12816 | 101 | SC24404 | 87 | SC48525 | 134 | SC59416 | 227 | SC84507 | 239 | ST09000 | 141 |
| SC12817 | 101 | SC24405 | 87 | SC48526 | 134 | SC59417 | 227 | SC84508 | 239 | ST09001SJ | 48 |
| SC12820 | 101 | SC34204 | 104 | SC48527 | 134 | SC59421 | 227 | SC84509 | 239 | ST09002SJ | 49 |
| SC12821 | 101 | SC34210 | 104 | SC48528 | 134 | SC59422 | 227 | SC84510 | 239 | ST09003SJ | 59 |
| SC12822 | 101 | SC34213 | 104 | SC48529 | 134 | SC59423 | 227 | SC84511 | 239 | ST09004SJ | 60 |
| SC12822 SC12823 | 101 | SC34213 | 104 | SC48529 | 134 | SC59423 | 227 | SC84512 | 239 | ST090043J | 72 |
| | | | | SC48550 SC48531 | | | 227 | | 239 | | 72 |
| SC12826 | 101 | SC34304T | 109 | | 134 | SC59471 | | SC84513 | | ST09006SJ | |
| SC12827 | 101 | SC34305T | 109 | SC48603 | 135 | SC59472 | 227 | SC84514 | 239 | ST09007SJ | 74 |
| SC13214 | 78 | SC34306T | 109 | SC48604 | 135 | SC59473 | 227 | SC90751 | 242 | ST09008SJ | 105 |
| SC21101 | 58 | SC34307T | 109 | SC48605 | 135 | SC59474 | 227 | SC90753 | 242 | ST09009SJ | 105 |
| SC21102 | 58 | SC34308T | 109 | SC48607 | 135 | SC59475 | 227 | SC90771 | 242 | ST09010SJ | 37 |
| SC21103 | 58 | SC34309T | 109 | SC48609 | 135 | SC59476 | 227 | SC90774 | 242 | ST09011SJ | 50 |
| SC21107 | 58 | SC34310T | 109 | SC48610 | 135 | SC80104 | 231 | SC90775 | 242 | ST09012SJ | 138 |
| SC21201 | 58 | SC34311T | 109 | SC48611 | 135 | SC80105 | 231 | SC90776 | 242 | ST09013SJ | 50 |
| SC21202 | 58 | SC34312T | 109 | SC48612 | 135 | SC80106A | 231 | SC90782 | 242 | ST09014A | 41 |
| SC21203 | 58 | SC34314T | 109 | SC48613 | 135 | SC80107A | 231 | SC90783 | 242 | ST09014SJ | 40 |
| SC21204 | 58 | SC34315T | 109 | SC48614 | 135 | SC80108A | 231 | SC90784 | 242 | ST09015SJ | 90 |
| SC21205 | 58 | SC34316T | 109 | SC48615 | 135 | SC80110A | 231 | SC90785 | 242 | ST09017SJ | 124 |
| SC21206 | 58 | SC34317T | 109 | SC48616 | 135 | SC80112A | 231 | ST01111 | 271 | ST09018SJ | 119 |
| SC21200 | 58 | SC3431/1 | 109 | SC48010 SC48617 | 135 | SC80112A | 231 | ST01113C | 271 | ST090103J ST09019SJ | 124 |
| | | | | | | | | | | | |
| SC21302 | 58 | SC34403T | 111 | SC48618 | 135 | SC80116A | 231 | ST01119 | 272 | ST09020SJ | 119 |
| SC21303 | 58 | SC34404T | 111 | SC48619 | 135 | SC80304 | 232 | ST01133SC | 272 | ST09021SJ | 124 |
| SC21401 | 58 | SC34405T | 111 | SC48620 | 135 | SC80305 | 232 | ST03141ST | 220 | ST09022SJ | 121 |

| Article Code | Page No. | Article Code | Page No. | Article Code | Page No. | Article Code | Page No. | Article Code | Page No. | Article Code | Page No. |
|---------------------------|-------------|------------------------|-------------|------------------------|-------------|------------------------|-------------|------------------------|-------------|------------------------|-------------|
| ST09023SJ | 155 | ST09107ASJ | 234 | ST09510SJ | 43 | ST11308SC | 52 | ST12401SC | 63 | ST12920SC | 64 |
| ST09024SJ | 147 | ST09107CHBSJ | 236 | ST09516SJ | 39 | ST11309SC | 52 | ST12402SC | 63 | ST12922SC | 69 |
| ST09025SJ | 157 | ST09108SJ | 234 | ST09519SJ | 40 | ST11310SC | 52 | ST12403SC | 63 | ST12930SC | 68 |
| ST09026SJ | 122 | ST09120SJ | 238 | ST09520 | 71 | ST11311SC | 52 | ST12404SC | 63 | ST12960SC | 65 |
| ST09027SJ | 123 | ST09121SJ | 235 | ST09521-02 | 49 | ST11312SC | 52 | ST12405SC | 63 | ST12970SC | 66 |
| ST09029SJ | 129 | ST09122SJ | 235 | ST09521L | 48 | ST11313SC | 52 | ST12406SC | 63 | ST12971ST | 65 |
| ST09030 | 119 | ST09123SJ | 235 | ST09522 | 48 | ST113135C | 52 | ST12407SC | 63 | ST12972ST | 65 |
| ST09031SJ | 137 | ST09124SJ | 229 | ST09523 | 59 | ST11401SC | 53 | ST12408SC | 63 | ST12974 | 67 |
| ST090313J | 137 | ST091243J | 97 | ST09524 | 59 | ST114013C | 53 | ST12408SC | 63 | ST12974 | 83 |
| ST09032 | 135 | ST091313J | 97 | ST09525SJ | 71 | ST11402SC | 53 | ST124093C | 63 | ST12985SC | 87 |
| ST090333U | 135 | ST091323J | 97 | ST095255J | 72 | ST11403SC ST11404SC | 53 | ST124103C ST12411SC | 63 | ST129855C | 76 |
| | 157 | | | ST09526 ST09528 | 19 | | 53 | | 63 | | 76 |
| ST09034 | | ST09137 | 100 | | | ST11405SC | | ST12412SC | | ST13102SC | |
| ST09037SJ | 133 | ST09138 | 100 | ST09531SJ | 261 | ST11406SC | 53 | ST12413SC | 63 | ST13103SC | 76 |
| ST09038SJ | 153 | ST09148SJ | 90 | ST09535SJ | 262 | ST11407SC | 53 | ST12414SC | 63 | ST13104SC | 76 |
| ST09040-02 | 153 | ST09152SJ | 261 | ST09602SJ | 216 | ST11408SC | 53 | ST12415SC | 63 | ST13105SC | 76 |
| ST09043SJ | 166 | ST09161SJ | 241 | ST09603SJ | 216 | ST11409SC | 53 | ST12601BU | 62 | ST13106SC | 76 |
| ST09044 | 39 | ST09162SJ | 241 | ST09701 | 238 | ST11410SC | 53 | ST12602BU | 62 | ST13107SC | 76 |
| ST09050SJ | 152 | ST09163SJ | 241 | ST09702 | 239 | ST11901SC | 54 | ST12603BU | 62 | ST13108SC | 76 |
| ST09051SJ | 51 | ST09164SJ | 241 | ST09703SJ | 268 | ST11903SC | 57 | ST12604BU | 62 | ST13109SC | 76 |
| ST09052SJ | 51 | ST09203SJ | 71 | ST09704ASJ | 276 | ST11904SC | 57 | ST12605BU | 62 | ST13110SC | 76 |
| ST09053SJ | 51 | ST09204SJ | 72 | ST09704SJ | 276 | ST11905ST | 54 | ST12606BU | 62 | ST13111SC | 76 |
| ST09054 | 38 | ST09251SJ | 184 | ST09709SJ | 276 | ST11906ST | 54 | ST12607BU | 62 | ST13112SC | 76 |
| ST09057-02 | 88 | ST09261SJ | 173 | ST09715 | 239 | ST11909SC | 55 | ST12608BU | 62 | ST13113SC | 76 |
| ST09060-6SJ | 72 | ST09262U | 35 | ST09901SJ | 18 | ST11910SC | 55 | ST12609BU | 62 | ST13114SC | 76 |
| ST09060SJ | 73 | ST09302U | 213 | ST09902SJ | 18 | ST11911SC | 56 | ST12610BU | 62 | ST13115SC | 76 |
| ST09062-02 | 122 | ST09303 | 213 | ST09903SJ | 18 | ST11912SC | 56 | ST12611BU | 62 | ST13201SC | 78 |
| ST09063 | 122 | ST09303ESJ | 205 | ST09904-02 | 20 | ST11913SC | 56 | ST12612BU | 62 | ST13202SC | 78 |
| ST09064SJ | 121 | ST09303ME | 209 | ST09905 | 20 | ST11914SC | 57 | ST12612BU | 62 | ST13203SC | 78 |
| ST09066-02 | 149 | ST09304ESJ | 205 | ST09906 | 20 | ST11922SC | 57 | ST12614BU | 62 | ST132033C | 78 |
| | | | | ST09900 ST09907 | 20 | | | | 62 | | 78 |
| ST09068SJ | 124 | ST09305SJ | 205 | | | ST11924ST | 289 | ST12615BU | | ST13205SC | |
| ST09069SJ | 125 | ST09306SJ | 205 | ST09908 | 21 | ST11970SC | 54 | ST12616BU | 62 | ST13206SC | 78 |
| ST09070SJ | 119 | ST09309SJ | 209 | ST09909-02 | 22 | ST11974 | 55 | ST12701SC | 64 | ST13207SC | 78 |
| ST09071SJ | 128 | ST09311SJ | 220 | ST09910 | 23 | ST12101SC | 61 | ST12702SC | 64 | ST13208SC | 78 |
| ST09072SJ | 131 | ST09312SJ | 220 | ST09911SJ | 23 | ST12102SC | 61 | ST12703SC | 64 | ST13209SC | 78 |
| ST09073SJ | 128 | ST09313SJ | 221 | ST09912SJ | 23 | ST12103SC | 61 | ST12704SC | 64 | ST13210SC | 78 |
| ST09074SJ | 125 | ST09314SJ | 221 | ST09913SJ | 24 | ST12104SC | 61 | ST12705SC | 64 | ST13211SC | 78 |
| ST09075 | 147 | ST09315SJ | 222 | ST09914SJ | 24 | ST12105SC | 61 | ST12706SC | 64 | ST13212SC | 78 |
| ST09077SJ | 37 | ST09316SJ | 221 | ST09915SJ | 19 | ST12106SC | 61 | ST12707SC | 64 | ST13213SC | 78 |
| ST09078SJ | 152 | ST09317SJ | 221 | ST09927 | 16 | ST12107SC | 61 | ST12708SC | 64 | ST13301SC | 76 |
| ST09079SJ | 147 | ST09324SJ | 219 | ST09928 | 16 | ST12108SC | 61 | ST12709SC | 64 | ST13302SC | 76 |
| ST09080SJ | 160 | ST09326SJ | 219 | ST09932A | 24 | ST12109SC | 61 | ST12710SC | 64 | ST13303SC | 76 |
| ST09082SJ | 163 | ST09332SJ | 222 | ST09934 | 19 | ST12110SC | 61 | ST12711SC | 64 | ST13304SC | 76 |
| ST09083SJ | 160 | ST09333SJ | 222 | ST09938 | 22 | ST12301SC | 61 | ST12712SC | 64 | ST13305SC | 76 |
| ST09084SJ | 168 | ST09341SJ | 216 | ST11101SC | 52 | ST12302SC | 61 | ST12901SC | 65 | ST13306SC | 76 |
| ST09085SJ | 60 | ST09342SJ | 217 | ST11102SC | 52 | ST12303SC | 61 | ST12903SC | 69 | ST13307SC | 76 |
| ST09086SJ | 71 | ST09343SJ | 217 | ST11103SC | 52 | ST12304SC | 61 | ST12904SC | 69 | ST13308SC | 76 |
| ST09087SJ | 74 | ST09347 | 216 | ST11104SC | 52 | ST12305SC | 61 | ST12905SC | 69 | ST13309SC | 76 |
| ST09088SJ | 75 | ST09348 | 217 | ST11105SC | 52 | ST12306SC | 61 | ST12906SC | 69 | ST13310SC | 76 |
| ST09090SJ | 73 | ST09350 | 217 | ST11106SC | 52 | ST12307SC | 61 | ST12907SC | 69 | ST13311SC | 76 |
| ST090903J ST09092ME-12 | | ST09500 | 267 | ST11107SC | 52 | ST123073C | 61 | ST12908SC | 69 | ST13312SC | 76 |
| ST09092ML-12 ST09093 | 123 | ST094013J | 267 | ST1110/SC | 52 | ST12309SC | 61 | ST12909SC | 67 | ST13313SC | 76 |
| | | ST09402SJ ST09405SJ | | ST11108SC ST11109SC | 52 | ST123093C ST12310SC | 61 | ST12909SC ST12910SC | | ST13313SC ST13314SC | 76 |
| ST09098SJ | 49 38 | | 267 | | | | | | 67 | | |
| ST09099 | | ST09406SJ | 268 | ST1110SC | 52 | ST12311SC | 61 | ST12911SC | 66 | ST13315SC | 76 |
| ST09101ASJ | 231 | ST09407SJ | 267 | ST11301SC | 52 | ST12312SC | 61 | ST12912SC | 68 | ST13316SC | 76 |
| ST09101CHBSJ | | ST09502SJ | 38 | ST11302SC | 52 | ST12313SC | 61 | ST12913SC | 68 | ST13317SC | 76 |
| ST09102SJ | 231 | ST09505SJ | 39 | ST11303SC | 52 | ST12314SC | 61 | ST12914SC | 68 | ST13318SC | 76 |
| ST09103ASJ | 232 | ST09506SJ | 37 | ST11304SC | 52 | ST12315SC | 61 | ST12915SC | 64 | ST13319SC | 76 |
| ST09104SJ | 232 | ST09508 | 261 | ST11305SC | 52 | ST12316SC | 61 | ST12916SC | 64 | ST13320SC | 76 |
| ST09105ASJ | 233 | ST09509 | 262 | ST11306SC | 52 | ST12317SC | 61 | ST12917SC | 68 | ST13321SC | 76 |
| ST09106SJ | 233 | ST09510L | 41 | ST11307SC | 52 | ST12318SC | 61 | ST12919SC | 64 | ST13324 | 76 |

ARTICLE CODE INDEX

Article Code Index

| Article Code | Page No. | Article Code | Page No. | Article Code | Page No. | Article Code | Page No. | Article Code | Page No. | Article Code | Page No. |
|-----------------|-------------|-----------------|-------------|------------------------|-------------|------------------------|-------------|-----------------|-------------|------------------------|-------------|
| ST13401SC | 78 | ST13810 | 79 | ST16314SC | 91 | ST16607SC | 92 | ST24802SC | 88 | ST33804BU | 116 |
| ST13402SC | 78 | ST13812 | 79 | ST16315SC | 91 | ST16608SC | 92 | ST24803SC | 88 | ST33805BU | 116 |
| ST13403SC | 78 | ST13813 | 79 | ST16316SC | 91 | ST16609SC | 92 | ST24804SC | 88 | ST33806BU | 116 |
| ST13404SC | 78 | ST13814 | 79 | ST16317SC | 91 | ST16610SC | 92 | ST24805SC | 88 | ST33807BU | 116 |
| ST13405SC | 78 | ST13816 | 79 | ST16318SC | 91 | ST16611SC | 92 | ST24806SC | 88 | ST33808BU | 116 |
| ST13406SC | 78 | ST13817 | 79 | ST16319SC | 91 | ST16612SC | 92 | ST24807SC | 88 | ST33809BU | 116 |
| ST13407SC | 78 | ST13818 | 79 | ST16320SC | 91 | ST16613SC | 92 | ST25101SC | 89 | ST33810BU | 116 |
| ST13408SC | 78 | ST13819 | 79 | ST16321SC | 91 | ST16614SC | 92 | ST25102SC | 89 | ST33811BU | 116 |
| ST13409SC | 78 | ST13901SC | 82 | ST16322SC | 91 | ST16615SC | 92 | ST25103SC | 89 | ST33812BU | 116 |
| ST13410SC | 78 | ST13904SC | 86 | ST16323SC | 91 | ST16616SC | 92 | ST25104SC | 89 | ST33813BU | 116 |
| ST13411SC | 78 | ST13905SC | 86 | ST16401SC | 90 | ST16617SC | 92 | ST25105SC | 89 | ST33814BU | 116 |
| ST13412SC | 78 | ST13906SC | 86 | ST16402SC | 90 | ST16618SC | 92 | ST25106SC | 89 | ST33815BU | 116 |
| | | | | | | | | ST251003C | | | 116 |
| ST13413SC | 78 | ST13907SC | 86 | ST16403SC | 90 | ST16619SC | 92 | | 89 | ST33816BU | |
| ST13414SC | 78 | ST13908SC | 86 | ST16404SC | 90 | ST16620SC | 92 | ST25108SC | 89 | ST33817BU | 116 |
| ST13415SC | 78 | ST13909SC | 83 | ST16405SC | 90 | ST16622SC | 92 | ST25109SC | 89 | ST33818BU | 116 |
| ST13416SC | 78 | ST13910SC | 84 | ST16406SC | 90 | ST16623SC | 92 | ST25201SC | 89 | ST33819BU | 116 |
| ST13417SC | 78 | ST13911SC | 83 | ST16407SC | 90 | ST16624SC | 92 | ST25202SC | 89 | ST33820BU | 116 |
| ST13501SC | 77 | ST13912SC | 85 | ST16408SC | 91 | ST16901SC | 93 | ST25203SC | 89 | ST33821BU | 116 |
| ST13502SC | 77 | ST13913SC | 85 | ST16409SC | 91 | ST16902SC | 95 | ST25204SC | 89 | ST33822BU | 116 |
| ST13503SC | 77 | ST13914SC | 85 | ST16410SC | 91 | ST16903SC | 95 | ST25205SC | 89 | ST33911SC | 108 |
| ST13504SC | 77 | ST13915SC | 80 | ST16411SC | 91 | ST16904SC | 95 | ST25206SC | 89 | ST34201BU | 104 |
| ST13505SC | 77 | ST13916SC | 80 | ST16412SC | 91 | ST16905SC | 94 | ST25207SC | 89 | ST34202SC | 104 |
| ST13506SC | 77 | ST13917SC | 80 | ST16413SC | 91 | ST16906SC | 94 | ST25208SC | 89 | ST34203SC | 104 |
| ST13507SC | 77 | ST13918SC | 80 | ST16414SC | 91 | ST16907SC | 95 | ST25209SC | 89 | ST34205SC | 104 |
| ST13508SC | 77 | ST13919SC | 84 | ST16415SC | 91 | ST16908SC | 95 | ST25801SC | 89 | ST34206SC | 104 |
| ST13509SC | 77 | ST13930SC | 86 | ST16416SC | 91 | ST16919SC | 94 | ST25802SC | 89 | ST34207SC | 104 |
| ST13510SC | 77 | ST13950SC | 85 | ST16417SC | 91 | ST17001SC | 84 | ST25803SC | 89 | ST34208SC | 104 |
| ST135103C | 77 | ST13951SC | 83 | ST16418SC | 91 | ST21104SC | 58 | ST25804SC | 89 | ST34208SC | 104 |
| | | | | | | | | | | | |
| ST13512SC | 77 | ST13960SC | 81 | ST16419SC | 91 | ST21105SC | 58 | ST25805SC | 89 | ST34211SC | 104 |
| ST13513SC | 77 | ST13970SC | 82 | ST16420SC | 91 | ST21106 | 58 | ST25806SC | 89 | ST34212SC | 104 |
| ST13514SC | 77 | ST13971ST | 82 | ST16421SC | 91 | ST21108BU | 58 | ST25807SC | 89 | ST34214SC | 104 |
| ST13515SC | 77 | ST13972ST | 82 | ST16422SC | 91 | ST24101SC | 88 | ST32902 | 103 | ST34303SC | 108 |
| ST13601SC | 77 | ST13974 | 83 | ST16501SC | 93 | ST24102SC | 88 | ST33101SC | 109 | ST34304SC | 108 |
| ST13602SC | 77 | ST13975 | 48 | ST16502SC | 93 | ST24103SC | 88 | ST33102SC | 109 | ST34305SC | 108 |
| ST13603SC | 77 | ST13992BU | 66 | ST16503SC | 93 | ST24104SC | 88 | ST33103SC | 109 | ST34306SC | 108 |
| ST13604SC | 77 | ST14010SC | 79 | ST16504SC | 93 | ST24105SC | 88 | ST33104SC | 109 | ST34307SC | 108 |
| ST13605SC | 77 | ST14011SC | 79 | ST16505SC | 93 | ST24106SC | 88 | ST33105SC | 109 | ST34308SC | 108 |
| ST13606SC | 77 | ST14012SC | 79 | ST16506SC | 93 | ST24107SC | 88 | ST33106SC | 109 | ST34309SC | 108 |
| ST13607SC | 77 | ST14013SC | 79 | ST16507SC | 93 | ST24108SC | 88 | ST33107SC | 109 | ST34310SC | 108 |
| ST13608SC | 77 | ST14014SC | 79 | ST16508SC | 93 | ST24109SC | 88 | ST33108SC | 109 | ST34311SC | 108 |
| ST13609SC | 77 | ST14016SC | 79 | ST16509SC | 93 | ST24201SC | 87 | ST33109SC | 100 | ST34312SC | 108 |
| ST13610SC | 77 | ST14017SC | 79 | ST16510SC | 93 | ST24202SC | 87 | ST33110SC | 100 | ST34314SC | 108 |
| ST13611SC | 77 | ST14018SC | 79 | ST16511SC | 93 | ST24203SC | 87 | ST33501BU | 113 | ST34315SC | 108 |
| ST13612SC | 77 | ST14019SC | 79 | ST16512SC | 93 | ST242033C | 87 | ST33502BU | 113 | ST34316SC | 108 |
| ST13613SC | 77 | ST140193C | 79 | ST16513SC | 93 | ST242043C | 87 | ST33502BU | 113 | ST34317SC | 108 |
| | | | | ST16515SC ST16514SC | | ST24205SC ST24206SC | | | | | |
| ST13614SC | 77 | ST14022SC | 79 | | 93 | | 87 | ST33504BU | 113 | ST34320SC | 109 |
| ST13615SC | 77 | ST14024SC | 79 | ST16515SC | 93 | ST24207SC | 87 | ST33505BU | 113 | ST34322SC | 109 |
| ST13616SC | 77 | ST16301SC | 91 | ST16516SC | 93 | ST24208SC | 87 | ST33506BU | 113 | ST34323SC | 109 |
| ST13617SC | 77 | ST16302SC | 91 | ST16517SC | 93 | ST24209SC | 87 | ST33507BU | 113 | ST34325SC | 109 |
| ST13618SC | 77 | ST16303SC | 91 | ST16518SC | 93 | ST24401BU | 87 | ST33508BU | 113 | ST34397T | 105 |
| ST13619SC | 77 | ST16304SC | 91 | ST16519SC | 93 | ST24402BU | 87 | ST33509BU | 113 | ST34398T | 105 |
| ST13620SC | 77 | ST16305SC | 91 | ST16520SC | 93 | ST24403BU | 87 | ST33510BU | 113 | ST34399T | 107 |
| ST13701SC | 81 | ST16306SC | 91 | ST16521SC | 93 | ST24404IEC | 80 | ST33511BU | 113 | ST34403SC | 110 |
| ST13702SC | 81 | ST16307SC | 91 | ST16522SC | 93 | ST24405IEC | 80 | ST33512BU | 113 | ST34404SC | 110 |
| ST13703SC | 81 | ST16308SC | 91 | ST16523SC | 93 | ST24406BU | 87 | ST33513BU | 113 | ST34405SC | 110 |
| ST13704SC | 81 | ST16309SC | 91 | ST16602SC | 92 | ST24406IEC | 80 | ST33514BU | 113 | ST34406SC | 110 |
| ST13705SC | 81 | ST16310SC | 91 | ST16603SC | 92 | ST24407BU | 87 | ST33515BU | 113 | ST34407SC | 110 |
| ST13706SC | 81 | ST16311SC | 91 | ST16604SC | 92 | ST24408IEC | 80 | ST33801BU | 115 | ST34408SC | 110 |
| ST137003C | 81 | ST16312SC | 91 | ST16605SC | 92 | ST244001EC | 80 | ST33802BU | 115 | ST34408SC ST34409SC | 110 |
| | 01 | 011001200 | JI | 011000330 | JL | JILTTIULL | 00 | 01000200 | IIJ | 010770330 | 110 |

| Article Code | Page No. |
|------------------------|-------------|------------------------|-------------|------------------------|-------------|------------------------|-------------|------------------------|-------------|------------------------|-------------|
| ST34411SC | 110 | ST34632 | 114 | ST40103SC | 126 | ST40281SC | 127 | ST41315SC | 139 | ST42416SC | 140 |
| ST34412SC | 110 | ST34701SC | 104 | ST40104SC | 126 | ST40282SC | 127 | ST41316SC | 139 | ST42417SC | 140 |
| ST34414SC | 110 | ST34702SC | 104 | ST40105SC | 126 | ST40283SC | 127 | ST41317SC | 139 | ST42418SC | 140 |
| ST34415SC | 110 | ST34703SC | 108 | ST40106SC | 126 | ST40284SC | 127 | ST41318SC | 139 | ST42419SC | 140 |
| ST34417SC | 110 | ST34704SC | 108 | ST40107SC | 126 | ST40285SC | 127 | ST41319SC | 139 | ST42421SC | 140 |
| ST34419SC | 110 | ST34705SC | 108 | ST40108SC | 126 | ST40286SC | 127 | ST41321SC | 139 | ST42422SC | 140 |
| ST34420SC | 110 | ST34706SC | 108 | ST40109SC | 126 | ST40287SC | 127 | ST41322SC | 139 | ST42424SC | 140 |
| ST34422SC | 110 | ST34708SC | 112 | ST40110SC | 126 | ST40288SC | 127 | ST41324SC | 139 | ST43101ST | 156 |
| ST34423SC | 110 | ST34712SC | 112 | ST40111SC | 126 | ST40289SC | 127 | ST42101SC | 132 | ST43102ST | 156 |
| ST34425SC | 110 | ST34714SC | 103 | ST40112SC | 126 | ST40290SC | 127 | ST42102SC | 132 | ST43103ST | 157 |
| ST34505SC | 112 | ST34715SC | 103 | ST40113SC | 126 | ST40291SC | 127 | ST42104SC | 132 | ST43104ST | 157 |
| ST34506SC | 112 | ST34716SC | 107 | ST40114SC | 126 | ST40292SC | 127 | ST42105SC | 132 | ST43105ST | 157 |
| ST34507SC | 112 | ST34717SC | 107 | ST40115SC | 126 | ST41101SC | 130 | ST42106SC | 132 | ST43106ST | 157 |
| ST34508SC | 113 | ST34718SC | 111 | ST40116SC | 126 | ST41102SC | 130 | ST42107SC | 132 | ST43107ST | 157 |
| ST34509SC | 113 | ST34719SC | 107 | ST40117SC | 126 | ST41103SC | 130 | ST42201SC | 132 | ST43108ST | 157 |
| ST34510SC | 113 | ST34720SC | 112 | ST40118SC | 126 | ST41104SC | 130 | ST42202SC | 132 | ST43109ST | 157 |
| ST34511SC | 113 | ST34721SC | 111 | ST40119SC | 126 | ST41105SC | 130 | ST42203SC | 132 | ST43110ST | 157 |
| ST34512SC | 113 | ST34824SC | 115 | ST40120SC | 126 | ST41106SC | 130 | ST42204SC | 132 | ST43111ST | 157 |
| ST34513SC | 113 | ST34825SC | 115 | ST40121SC | 126 | ST41107SC | 130 | ST42205SC | 132 | ST43112ST | 157 |
| ST34514SC | 113 | ST34826SC | 115 | ST40122SC | 126 | ST41108SC | 130 | ST42206SC | 132 | ST43113ST | 157 |
| ST34515SC | 113 | ST34827SC | 115 | ST40123SC | 126 | ST41201SC | 130 | ST42207SC | 132 | ST43114ST | 157 |
| ST34516SC | 113 | ST34828SC | 115 | ST40124SC | 126 | ST41202SC | 130 | ST42208SC | 132 | ST43115ST | 157 |
| ST34517SC | 113 | ST34829SC | 115 | ST40201SC | 126 | ST41203SC | 130 | ST42209SC | 132 | ST43201ST | 156 |
| ST34518SC | 113 | ST34830SC | 115 | ST40202SC | 126 | ST41204SC | 130 | ST42210SC | 132 | ST43202ST | 156 |
| ST34519SC | 113 | ST34831SC | 115 | ST40202SC | 126 | ST41205SC | 130 | ST422103C | 132 | ST43203ST | 156 |
| ST34520SC | 113 | ST34832SC | 115 | ST402033C | 126 | ST41205SC | 130 | ST42212SC | 132 | ST43204ST | 156 |
| ST34521SC | 113 | ST34833SC | 115 | ST402043C | 126 | ST412003C | 130 | ST42212SC | 132 | ST43205ST | 156 |
| ST34522SC | 113 | ST34834SC | 115 | ST402053C | 126 | ST412073C | 130 | ST422133C | 132 | ST43206ST | 156 |
| ST34523SC | 113 | ST34835SC | 115 | ST402003C | 120 | ST41209SC | 130 | ST422143C | 132 | ST432003T | 156 |
| ST34524SC | 113 | ST34836SC | 115 | ST402073C | 120 | ST412093C | 130 | ST422153C | 132 | ST43207ST | 156 |
| ST34525SC | 113 | ST34837SC | 115 | ST402003C | 120 | ST412103C | 130 | ST422103C | 132 | ST43209ST | 156 |
| ST34526SC | 113 | ST34838SC | 115 | ST402093C | 120 | ST412113C | 130 | ST4221/30 ST42218SC | 132 | ST4320931 | 156 |
| ST34527SC | 113 | ST34838SC ST34839SC | 115 | ST402103C | 120 | ST41212SC ST41213SC | 130 | ST42218SC ST42219SC | 132 | ST4321031 ST43211ST | 156 |
| ST34528SC | 113 | ST348393C | 115 | ST402113C | 120 | ST412133C | 130 | ST4221930 | 132 | ST432113T | 156 |
| ST34529SC | 113 | ST34840SC ST34841SC | 115 | ST40212SC ST40213SC | 120 | ST41214SC ST41215SC | 130 | ST42220SC ST42221SC | 132 | ST43212ST ST43213ST | 156 |
| | 113 | | 115 | | 120 | | 130 | ST422213C | 132 | ST4321331 | 156 |
| ST34530 ST34605SC | | ST34842SC ST34843SC | 115 | ST40214SC ST40215SC | 120 | ST41216SC ST41217SC | 130 | ST42223C | 132 | ST4321431 | |
| ST34606SC | 114 114 | ST34844SC | 115 | ST402153C | 120 | ST412173C | 130 | ST42223SC ST42224SC | 132 | ST432155T | 156 156 |
| ST34607SC | 114 | ST34845SC | 115 | ST402103C | 120 | ST412103C | 130 | ST422243C | 132 | ST4321031 | 156 |
| ST34608SC | 114 | ST34846SC | 115 | ST4021/3C ST40218SC | 120 | ST412193C | 130 | ST4222550 ST42301 | 133 | ST4321/ST ST43218ST | 156 |
| | | | 115 | ST402103C | 120 | ST412203C | 130 | ST42301 | 133 | ST43219ST | 156 |
| ST34609SC ST34610SC | 114 114 | ST34847SC ST34848SC | 115 | ST402193C ST40220SC | 126 | ST41221SC ST41222SC | 130 | ST42302 ST42303 | 133 | ST43220ST | 156 |
| ST34610SC ST34611SC | 114 | ST34849SC | 115 | ST40220SC ST40221SC | 126 | ST41222SC ST41223SC | 130 | ST42303 | 133 | ST43220ST ST43221ST | 156 |
| ST34612SC | 114 | ST34849SC ST34850SC | 115 | ST40221SC ST40222SC | 126 | ST41225SC ST41225ST | 130 | ST42304 ST42305 | 133 | ST43221ST ST43222ST | 156 |
| ST34612SC ST34613SC | 114 | ST34850SC ST34851SC | 115 | ST40222SC ST40223SC | 126 | ST4122551 ST41226 | 130 | ST42305 | 133 | ST4322251 ST43501 | 150 |
| ST34613SC | 114 | ST34852SC | 115 | ST402233C | 120 | ST41220 | 130 | ST42300 | 133 | ST43502 | 150 |
| ST34615SC | 114 | ST34853SC | 115 | ST40235SC | 120 | ST41227ST ST41301SC | 130 | ST42307 | 133 | ST43502 | 150 |
| ST34615SC ST34616SC | 114 | ST348555C | 116 | ST402353C | 120 | ST413013C | 130 | ST42309 ST42310 | 133 | ST43505 | 150 |
| | | | | | | | | | | | |
| ST34617SC | 114 | ST34925SC | 116 116 | ST40237SC ST40241SC | 126 | ST41303SC | 130 | ST42312 ST42315 | 133 | ST43505 ST43506 | 150 150 |
| ST34618SC | 114 | ST34926SC | | | 126 126 | ST41304SC ST41305SC | 130 130 | ST42315 ST42406SC | 133 | ST43506 ST43508 | 150 |
| ST34619SC | 114 | ST34928SC | 116 | ST40242SC | | | | | 140 | | |
| ST34620SC | 114 | ST34929SC | 116 | ST40243SC | 126 | ST41306SC | 139 | ST42407SC | 140 | ST43511 | 150 |
| ST34621SC | 114 | ST34930SC | 116 | ST40244SC | 126 | ST41307SC | 139 | ST42408SC | 140 | ST43512 | 150 |
| ST34622SC | 114 | ST34931SC | 116 | ST40245SC | 126 | ST41308SC | 139 | ST42409SC | 140 | ST43601 | 150 |
| ST34623SC | 114 | ST34934SC | 116 | ST40246SC | 126 | ST41309SC | 139 | ST42410SC | 140 | ST43602 | 150 |
| ST34624SC | 114 | ST34937SC | 116 | ST40248SC | 126 | ST41310SC | 139 | ST42411SC | 140 | ST43603 | 150 |
| ST34625SC | 114 | ST34938SC | 116 | ST40249SC | 126 | ST41311SC | 139 | ST42412SC | 140 | ST43604 | 150 |
| ST34626SC | 114 | ST34940SC | 116 | ST40250SC | 126 | ST41312SC | 139 | ST42413SC | 140 | ST43605 | 150 |
| ST34628SC | 114 | ST40101SC | 126 | ST40251SC | 126 | ST41313SC | 139 | ST42414SC | 140 | ST43606 | 150 |
| ST34629SC | 114 | ST40102SC | 126 | ST40252SC | 126 | ST41314SC | 139 | ST42415SC | 140 | ST43607 | 150 |

ARTICLE CODE INDEX

Article Code Index

| Article Code | Page No. | Article Code | Page No. | Article Code | Page No. | Article Code | Page No. | Article Code | Page No. | Article Code | Page No. |
|-----------------|-------------|-----------------|-------------|------------------------|-------------|--------------------|-------------|------------------------|-------------|-----------------|-------------|
| ST43608 | 150 | ST46473BU | 165 | ST46905 | 167 | ST48509 | 134 | ST61607SC | 212 | ST63507SC | 211 |
| ST43609 | 150 | ST46476BU | 165 | ST46906 | 167 | ST48515 | 134 | ST61608SC | 212 | ST63508SC | 211 |
| ST43610 | 150 | ST46477BU | 165 | ST46909 | 167 | ST48516 | 134 | ST61703SC | 213 | ST63509SC | 211 |
| ST43611 | 150 | ST46478BU | 165 | ST46911 | 167 | ST48517 | 134 | ST61705SC | 213 | ST63510SC | 211 |
| ST43612 | 150 | ST46479BU | 165 | ST46912 | 167 | ST48519 | 134 | ST61706SC | 213 | ST63511SC | 211 |
| ST43613 | 150 | ST46480BU | 165 | ST47101SC | 141 | ST48520 | 134 | ST61707SC | 213 | ST63512SC | 211 |
| ST43614 | 150 | ST46481BU | 165 | ST47102SC | 141 | ST48521 | 134 | ST61708SC | 213 | ST63513SC | 211 |
| ST43615 | 150 | ST46482BU | 165 | ST47103SC | 141 | ST49202BU | 136 | ST62202SC | 206 | ST63514SC | 211 |
| ST43616 | 150 | ST46601ST | 162 | ST47104SC | 141 | ST50402 | 191 | ST622025C | 206 | ST63515SC | 211 |
| ST43617 | 150 | ST46602ST | 162 | ST47122 | 144 | ST53301 | 202 | ST62204SC | 200 | ST63516SC | 211 |
| ST43618 | 150 | ST46603ST | 162 | ST47122 | 144 | ST53302 | 202 | ST622043C | 200 | ST63517SC | 211 |
| ST43619 | 150 | ST46604ST | 162 | ST47125 | 144 | ST53302 ST53303 | 202 | ST62205SC ST62207SC | 206 | ST64101 | 289 |
| | | | | | | | | | | | |
| ST45201SC | 138 | ST46605ST | 162 | ST47125 | 144 | ST53304 | 202 | ST62208SC | 206 | ST64102ST | 289 |
| ST45202SC | 138 | ST46606ST | 162 | ST47130 | 143 | ST53305 | 202 | ST62209SC | 206 | ST64103 | 289 |
| ST45203SC | 138 | ST46607ST | 162 | ST47201SC | 143 | ST53306 | 202 | ST62210SC | 206 | ST64104 | 289 |
| ST45204SC | 138 | ST46608ST | 162 | ST47202SC | 143 | ST53307 | 202 | ST62211SC | 206 | ST66202SC | 212 |
| ST46135U | 157 | ST46609ST | 162 | ST47203SC | 143 | ST53308 | 202 | ST62212SC | 206 | ST66203SC | 212 |
| ST46200ST | 158 | ST46610ST | 162 | ST47204SC | 143 | ST53309 | 202 | ST62213SC | 206 | ST66204SC | 212 |
| ST46201ST | 158 | ST46611ST | 162 | ST47205SC | 143 | ST53310 | 202 | ST62214SC | 206 | ST66205SC | 212 |
| ST46202ST | 158 | ST46612ST | 162 | ST47206SC | 143 | ST53311 | 202 | ST62215SC | 206 | ST66206SC | 212 |
| ST46203ST | 158 | ST46613 | 162 | ST47207SC | 143 | ST53312 | 202 | ST62216SC | 206 | ST70001U | 173 |
| ST46204ST | 158 | ST46614 | 162 | ST47208SC | 143 | ST53313 | 202 | ST62217SC | 206 | ST70002U | 173 |
| ST46205ST | 158 | ST46615 | 162 | ST47221SC | 144 | ST53314 | 202 | ST62302SC | 207 | ST70003U | 180 |
| ST46206ST | 158 | ST46616 | 162 | ST47222SC | 144 | ST53401 | 203 | ST62303SC | 207 | ST70101AST | 174 |
| ST46301 | 159 | ST46617 | 162 | ST47223SC | 144 | ST53402 | 203 | ST62304SC | 207 | ST70102AST | 174 |
| ST46302 | 159 | ST46654ST | 169 | ST47224SC | 144 | ST59271ST | 224 | ST62305SC | 207 | ST70131ST | 174 |
| ST46303ST | 159 | ST46655ST | 169 | ST47225SC | 144 | ST59272ST | 224 | ST62307SC | 207 | ST70132ST | 174 |
| ST46304ST | 159 | ST46656ST | 169 | ST47226SC | 144 | ST59273ST | 224 | ST62308SC | 207 | ST70141ST | 179 |
| ST46305ST | 159 | ST46671BU | 162 | ST472203C | 167 | ST59274 | 224 | ST62309SC | 207 | ST70201AST | 175 |
| ST46306ST | 159 | ST46672BU | 162 | ST4730331 | 168 | ST61002SC | 208 | ST62310SC | 207 | | 175 |
| | | ST46673BU | | | 134 | | | | | ST70202AST | 175 |
| ST46307ST | 159 | | 162 | ST47501ST | | ST61003SJ | 209 | ST62311SC | 207 | ST70203AST | |
| ST46308ST | 159 | ST46674BU | 162 | ST47502ST | 134 | ST61101SC | 208 | ST62312SC | 207 | ST70232ST | 175 |
| ST46309 | 159 | ST46675BU | 162 | ST47503ST | 134 | ST61102SC | 208 | ST62313SC | 207 | ST70233ST | 175 |
| ST46310ST | 159 | ST46676BU | 162 | ST47504ST | 134 | ST61103SC | 208 | ST62314SC | 207 | ST70301AST | 176 |
| ST46311 | 159 | ST46677BU | 163 | ST47505ST | 134 | ST61104SC | 208 | ST62315SC | 207 | ST70302AST | 176 |
| ST46312ST | 159 | ST46678BU | 163 | ST47506ST | 134 | ST61105SC | 208 | ST62316SC | 207 | ST70303AST | 176 |
| ST46322 | 159 | ST46679BU | 163 | ST47507ST | 134 | ST61106SC | 208 | ST62317SC | 207 | ST70331ST | 176 |
| ST46323 | 159 | ST46680BU | 163 | ST47509ST | 134 | ST61107SC | 208 | ST62501ST | 284 | ST70332ST | 176 |
| ST46324 | 159 | ST46681BU | 163 | ST47530 | 152 | ST61108SC | 208 | ST62502ST | 284 | ST70333ST | 176 |
| ST46325 | 159 | ST46682BU | 163 | ST47701SC | 136 | ST61211SC | 215 | ST62503ST | 285 | ST70411ST | 179 |
| ST46326 | 159 | ST46683BU | 163 | ST47702SC | 136 | ST61212SC | 215 | ST62601ST | 285 | ST70412ST | 179 |
| ST46327 | 159 | ST46801ST | 166 | ST47703SC | 136 | ST61213SC | 215 | ST63402SC | 210 | ST70413ST | 179 |
| ST46328 | 159 | ST46802ST | 166 | ST47704SC | 136 | ST61214SC | 215 | ST63403SC | 210 | ST70414ST | 179 |
| ST46401ST | 165 | ST46803ST | 166 | ST47705SC | 136 | ST61221SC | 214 | ST63404SC | 210 | ST70511ST | 180 |
| ST46402ST | 165 | ST46804ST | 166 | ST47706SC | 136 | ST61222SC | 214 | ST63405SC | 210 | ST70512ST | 180 |
| ST46403ST | 165 | ST46805ST | 166 | ST47707SC | 136 | ST61223SC | 214 | ST63407SC | 210 | ST70601ME | 179 |
| ST46404ST | 165 | ST46806ST | 166 | ST47710SC | 136 | ST61224SC | 214 | ST63408SC | 210 | ST70602ME | 179 |
| ST46405ST | 165 | ST46807ST | 166 | ST47712SC | 136 | ST61311SC | 214 | ST63409SC | 210 | ST70602ML | 175 |
| ST46406ST | 165 | ST46808ST | 166 | ST48101ST | 275 | ST61312SC | 215 | ST634093C | 210 | ST70612AST | 177 |
| | | | | ST48101ST ST48200SC | | | | | | | |
| ST46407ST | 165 | ST46809ST | 166 | | 137 | ST61313SC | 215 | ST63411SC | 210 | ST70613AST | 177 |
| ST46408ST | 165 | ST46810ST | 166 | ST48201SC | 137 | ST61314SC | 215 | ST63412SC | 210 | ST70614AST | 178 |
| ST46409ST | 165 | ST46811ST | 166 | ST48202SC | 137 | ST61315SC | 215 | ST63413SC | 210 | ST70615AST | 178 |
| ST46410ST | 165 | ST46812ST | 167 | ST48203SC | 137 | ST61321SC | 214 | ST63414SC | 210 | ST70616AST | 178 |
| ST46412 | 165 | ST46813ST | 167 | ST48204SC | 137 | ST61322SC | 214 | ST63415SC | 210 | ST70621ME | 181 |
| ST46413ST | 165 | ST46814ST | 167 | ST48301SC | 137 | ST61323SC | 214 | ST63416SC | 210 | ST70622ME | 181 |
| ST46414 | 165 | ST46815ST | 167 | ST48302SC | 137 | ST61324SC | 214 | ST63417SC | 210 | ST70642ST | 181 |
| ST46415 | 165 | ST46816ST | 167 | ST48303SC | 137 | ST61325SC | 214 | ST63502SC | 211 | ST70711ST | 180 |
| ST46421 | 165 | ST46817ST | 167 | ST48505 | 134 | ST61603SC | 212 | ST63503SC | 211 | ST70721ST | 180 |
| ST46422 | 165 | ST46902 | 167 | ST48506 | 134 | ST61605SC | 212 | ST63504SC | 211 | ST70812ST | 145 |
| ST46471BU | 165 | ST46904 | 167 | ST48507 | 134 | ST61606SC | 212 | ST63505SC | 211 | ST70813ST | 145 |

| Article Code | Page No. | Article Code | Page No. | Article Code | Page No. |
|-----------------|-------------|------------------------|-------------|------------------------|-------------|
| ST70814ST | 145 | ST83307SC | 236 | ST91333ME | 253 |
| ST70815ST | 145 | ST83308SC | 236 | ST91335ME | 253 |
| ST70816ST | 145 | ST83310SC | 236 | ST91336ME | 253 |
| ST70817ST | 145 | ST83312SC | 236 | ST91361ME | 253 |
| ST70818ST | 145 | ST83313SC | 236 | ST91362ME | 253 |
| ST70819ST | 145 | ST83314SC | 236 | ST91363ME | 253 |
| ST70841SC | 290 | ST83316SC | 236 | ST91410ME | 254 |
| ST70842SC | 290 | ST84318SC | 238 | ST91411ME | 254 |
| ST70843SC | 290 | ST84320SC | 238 | ST91412ME | 254 |
| ST70845SC | 290 | ST84323SC | 238 | ST91413ME | 254 |
| ST71002 | 182 | ST84325SC | 238 | ST91421ME | 254 |
| ST71101ST | 182 | ST84328 | 238 | ST91430ME | 254 |
| ST71102ST | 182 | ST90433ST | 290 | ST91431ME | 254 |
| ST71102ST | 182 | ST9043331 | 290 | ST91432ME | 254 |
| | | ST9043431 ST90435ST | 290 | | |
| ST71202ST | 182 | | | ST91501SC | 256 |
| ST71203ST | 182 | ST90436ST | 290 | ST91502SC | 256 |
| ST71301ST | 183 | ST90501SC | 283 | ST91503SC | 256 |
| ST71302ST | 183 | ST90502 | 283 | ST91511SC | 256 |
| ST71401SC | 183 | ST90504 | 283 | ST91512SC | 256 |
| ST71501SC | 183 | ST90623SC | 277 | ST91521SC | 256 |
| ST71601SC | 184 | ST90624SC | 277 | ST91522SC | 256 |
| ST71701SC | 184 | ST90626SC | 277 | ST91531SC | 257 |
| ST72001ST | 185 | ST90628SC | 277 | ST91532SC | 257 |
| ST72002ST | 185 | ST90633SC | 277 | ST91533SC | 257 |
| ST72004ST | 185 | ST90634SC | 277 | ST91601ME | 257 |
| ST72005ST | 185 | ST90636SC | 277 | ST91602ME | 257 |
| ST72011ST | 186 | ST90638SC | 277 | ST91603ME | 257 |
| ST72012ST | 186 | ST90640 | 277 | ST91604ME | 257 |
| ST72013ST | 186 | ST90642 | 277 | ST91605ME | 257 |
| ST72014ST | 186 | ST90651SC | 278 | ST91606ME | 257 |
| ST72021ST | 186 | ST90652SC | 279 | ST91611ME | 258 |
| ST72022ST | 186 | ST90658ST | 278 | ST91612ME | 258 |
| ST72022ST | 186 | ST90662SC | 278 | ST91012ML ST91613ME | 258 |
| | | ST90665 | | | |
| ST72024ST | 186 | | 279 | ST91614ME | 258 |
| ST72031ST | 186 | ST90762SC | 242 | ST91615ME | 258 |
| ST72032ST | 186 | ST90772SC | 242 | ST91621ME | 258 |
| ST72033ST | 186 | ST90786SC | 242 | ST92101SC | 243 |
| ST72034ST | 186 | ST91101 | 188 | ST92102SC | 243 |
| ST72041ST | 187 | ST91102ST | 188 | ST92103SC | 243 |
| ST72042ST | 187 | ST91104ST | 188 | ST92104SC | 243 |
| ST72043ST | 187 | ST91105ST | 189 | ST92105SC | 243 |
| ST72044ST | 187 | ST91106ST | 189 | ST92106SC | 243 |
| ST72203AST | 176 | ST91107ST | 189 | ST92107SC | 279 |
| ST72302B-02 | 175 | ST91108ST | 192 | ST92203SC | 280 |
| ST72401 | 174 | ST91201ST | 192 | ST92205SC | 280 |
| ST72501ST | 181 | ST91202ST | 192 | ST92207SC | 280 |
| ST72502ST | 181 | ST91212ST | 192 | ST92209SC | 280 |
| ST72503ST | 181 | ST91213ST | 192 | ST92301 | 244 |
| ST72511 | 200 | ST91311E | 251 | ST92302SC | 244 |
| ST83105SC | 235 | ST91312E | 251 | ST92303SC | 244 |
| ST83106SC | 235 | ST91312L | 251 | ST92304SC | 244 |
| ST83107SC | 235 | ST91312ME | 251 | ST9230430 | 244 |
| ST83107SC | 235 | ST91314ME ST91315E | 251 | ST92305 | 244 |
| | | | | | - |
| ST83110SC | 235 | ST91316E | 251 | ST92307SC | 245 |
| ST83112SC | 235 | ST91316ME | 251 | ST92308 | 245 |
| ST83113SC | 235 | ST91317E | 251 | ST92312SC | 244 |
| ST83114SC | 235 | ST91317ME | 251 | ST92313SC | 244 |
| ST83116SC | 235 | ST91318E | 251 | ST92314SC | 244 |
| ST83305SC | 236 | ST91322E | 251 | ST92315 | 244 |
| ST83306SC | 236 | ST91323E | 251 | ST92322SC | 245 |

ARTICLE CODE INDEX

| Article Code | Page No. | Ar Co |
|------------------------|-------------|----------|
| ST92323SC | 245 | ST9 |
| ST92324SC | 245 | ST9 |
| ST92401SC | 246 | ST9 |
| ST92402SC | 246 | ST |
| ST92403SC | 246 | ST |
| ST92404SC | 246 | ST |
| ST92405SC | 246 | ST9 |
| ST92406SC | 246 | ST9 |
| ST92501 | 246 | ST |
| ST92502SC | 246 | ST |
| ST92503SC | 246 | STS |
| ST92504SC | 246 | ST |
| ST92505 | 246 | ST |
| ST92521SC | 247 | ST |
| ST92522SC | 247 | ST |
| ST92523SC | 247 | ST |
| ST92524SC | 247 | ST |
| ST92525SC | 247 | ST |
| ST92531SC | 247 | ST |
| ST92532SC | 247 | ST |
| ST92532SC ST92533SC | | ST |
| | 247 | ST |
| ST92534SC | 247 | |
| ST92535SC | 247 | ST |
| ST92568 | 287 | ST |
| ST92569 | 287 | ST |
| ST92901SC | 248 | ST |
| ST92902SC | 248 | ST |
| ST92903SC | 248 | ST |
| ST92904SC | 248 | ST |
| ST92912ME | 248 | ST |
| ST92913ME | 248 | ST |
| ST93101ST | 193 | ST |
| ST93102ST | 193 | ST |
| ST93103ST | 193 | ST |
| ST93104ST | 193 | ST |
| ST93302ST | 194 | ST |
| ST93303ST | 194 | ST |
| ST93304ST | 194 | ST |
| ST93305ST | 194 | ST |
| ST93306ST | 194 | ST |
| ST93404 | 201 | ST9 |
| ST93404ME | 201 | ST9 |
| ST93405ME | 201 | ST |
| ST93405SC | 201 | ST9 |
| ST93406ME | 201 | ST |
| ST93426SC | 195 | ST9 |
| ST93428SC | 196 | ST |
| ST93429 | 196 | ST |
| ST93441SC | 197 | ST |
| ST93442SC | 197 | ST |
| ST93443SC | 198 | ST |
| ST93446SC | 198 | ST9 |
| ST93470SC | 198 | ST |
| ST93482 | 196 | STS |
| ST93486 | 197 | ST |
| ST93501SC | 194 | ST |
| ST93502ST | 195 | ST |
| ST93503ST | 195 | ST |
| ST93504ST | 195 | ST |
| ST93505ST | 195 | ST |
| 219220221 | 190 | 21 |

| Article Code | Page No. |
|--------------------------|-----------------|
| ST93506ST | 195 |
| ST93507ST | 195 |
| ST93508ST | 195 |
| ST93509ST | 195 |
| ST93621ME | 202 |
| ST93622ME | 202 |
| ST93623ME | |
| ST93624ME | 202 |
| | 202 202 |
| ST93625ME | <u>202</u> 9 |
| ST95101SC ST95102SC | |
| ST95102SC ST95103ASC | 10 |
| ST95105ASC ST95104A70 | 10 |
| | 43 |
| ST95104A70-6 | 43 |
| ST95104ASC | 9 |
| ST95107SC | 15 |
| ST95108SC | 13 |
| ST95109SC | 16 |
| ST95111SC | 14 |
| ST95115SC | 9 |
| ST95118SC | 13 |
| ST95119SC | 14 |
| ST95121 | 15 |
| ST95125 | 14 |
| ST95126 | 15 |
| ST95161SC | 10 |
| ST95162SC | 10 |
| ST95164SC | 10 |
| ST95181 | 11 |
| ST95182SC | 11 |
| ST95184SC | 11 |
| ST95188 | 12 |
| ST95198SC | 12 |
| ST95201ST | 287 |
| ST95207S | 32 |
| ST95208S | 31 |
| ST95211 | 12 |
| ST95213SC | 13 |
| ST95400 | 51 |
| ST95401 | 51 |
| ST95410 | 121 |
| ST95411 | 121 |
| ST95440 | 284 |
| ST95441 | 284 |
| ST96211SC | 171 |
| ST96212SC | 171 |
| ST96311SC | 171 |
| ST96312SC | 171 |
| ST96313SC | 171 |
| ST96411SC | 171 |
| ST96412SC | 171 |
| ST97201 | 282 |
| ST97203 | 282 |
| ST97204A | 282 |
| ST97204A | 281 |
| ST97212 | 281 |
| ST97212 | 281 |
| ST97215 | 283 |
| ST972213C | 283 |
| ST972223C | 199 |
| 313/30131 | 133 |

| Article Code | Page No. |
|-----------------|-------------|
| ST97302ST | 199 |
| ST97303ST | 199 |
| ST97304ST | 200 |
| ST97305ST | 199 |
| ST97311ST | 200 |
| ST97401ST | 268 |
| ST97403ST | 268 |
| ST97404ST | 268 |
| ST97405 | 268 |
| ST97406 | 268 |
| ST97407 | 269 |
| ST97422ST | 270 |
| ST97426ST | 270 |
| ST97427SC | 269 |
| ST97428SC | 269 |
| ST97431ME | 269 |
| ST97441ST | 270 |
| ST97451SC | 271 |
| ST97452SC | 271 |
| ST97501SC | 275 |
| ST97502SC | 275 |
| ST97521ST | 187 |
| ST97701SC | 281 |
| ST97702SC | 281 |
| ST97801ASC | 265 |
| ST97802ASC | 265 |
| ST97803ASC | 265 |
| ST97804ASC | 265 |
| ST97805ASC | 265 |
| ST97807ASC | 265 |
| ST97808ASC | 265 |
| ST97809ASC | 265 |
| ST97810ASC | 265 |
| ST97813A | 266 |
| ST97813SC | 266 |
| ST97817SC | 265 |



All SATA Products (unless otherwise stated) are fully warranted against manufacturing default including faulty materials and workmanship, subjected to being used for its intended purpose and allowing for fair wear and tear.

Defective tools will be repaired and/or replaced at SATA's discretion free of charge. They should be held by buyers or returned for inspection to the factory upon request.

This Lifetime Warranty does not extend to products that have been improperly used, altered, abused or repaired by others. Rustiness after usage, electroplate desquamation, surface scraped or plastic handle damage are not within warranty range. Damage in the packaging is also out of warranty range.

Warranty Information



The obvious dent or electroplate desquamation indicates that a pipe wrench or hammer (or other form of "cheater") has been abused on this ratchet. Please use a larger size of ratchet to increase the leverage of any wrench.



The obvious slippage on socket end or crack on socket wall indicates that this impact tools has been used on this socket. When you are working with impact tools, please choose impact sockets with black coat.



The breach of handle, blade chip-off and bent shanks are the results of using screwdriver as a pry bar, punch or chisel.



Distort or breach on the wrench is also result of using the wrench as a pry bar. Please use the right pry bar for prying.

Apex Tool Group B.V. Phileas Foggstraat 16 7821 AK Emmen The Netherlands T. +31(0)591667504 www.satatools.eu

Disclaimer

Specifications subject to change without notice. SATA is a registered trademark of Apex Brands, Inc. | © 2022 HT1100 100ST / 04.22 BO 5.0